


**1997**

**STATE OF CONNECTICUT  
ANNUAL AIR QUALITY SUMMARY**

**John G. Rowland  
Governor**

**Arthur J. Rocque, Jr.  
Commissioner**



# TABLE OF CONTENTS

	<b>PAGE</b>
LIST OF TABLES .....	ii
LIST OF FIGURES .....	iv
I. INTRODUCTION .....	1
A. Overview of Air Pollutant Concentrations in Connecticut .....	1
1. Particulate Matter .....	1
2. Sulfur Dioxide .....	2
3. Ozone .....	2
4. Nitrogen Dioxide .....	2
5. Carbon Monoxide .....	3
B. Air Monitoring Network .....	3
C. Pollutant Standards Index .....	3
D. Quality Assurance .....	4
II. PARTICULATE MATTER .....	10
III. SULFUR DIOXIDE .....	27
IV. OZONE .....	40
V. NITROGEN DIOXIDE .....	54
VI. CARBON MONOXIDE .....	59
VII. CLIMATOLOGICAL DATA .....	66
VIII. ATTAINMENT AND NON-ATTAINMENT OF THE NAAQS IN CONNECTICUT ..	73
IX. CONNECTICUT SLAMS, NAMS AND PAMS NETWORKS .....	77
X. PUBLICATIONS .....	87
XI. ERRATA .....	90

## LIST OF TABLES

TABLE NUMBER	TITLE OF TABLE	PAGE
1-1	Assessment of Ambient Air Quality .....	7
1-2	Air Quality Standards Exceeded in Connecticut in 1997 Based on Measured Concentrations .....	8
2-1	1995-1997 PM <sub>10</sub> Annual Averages and Statistical Projections .....	16
2-2	Statistically Predicted Number of Sites in Compliance with the Level of the Annual PM <sub>10</sub> Standards .....	22
2-3	Summary of the Statistically Predicted Number of PM <sub>10</sub> Sites Exceeding the Level of the 24-Hour Standards .....	25
3-1	1997 Annual Arithmetic Averages of Sulfur Dioxide .....	31
3-2	1995-1997 SO <sub>2</sub> Annual Averages and Statistical Projections .....	32
3-3	Comparisons of First and Second High Calendar Day and 24-Hour Running SO <sub>2</sub> Averages in 1997 .....	36
4-1	Number of Hours When the 1-Hour Ozone Standard Was Exceeded in 1997 .....	45
4-2	Number of Days When the 1-Hour Ozone Standard Was Exceeded in 1997 .....	46
4-3	VOC Measured at PAMS Sites .....	53
5-1	1995-1997 Nitrogen Dioxide Annual Averages .....	57
6-1	1997 Carbon Monoxide Standards Assessment Summary .....	62
6-2	1997 Carbon Monoxide Seasonal Features .....	63
6-3	Exceedances of the 8-hour CO Standard for 1993-1997 .....	64
7-1	1996 and 1997 Climatological Data, Bradley International Airport, Windsor Locks .....	67
7-2	1996 and 1997 Climatological Data, Sikorsky International Airport, Stratford .....	68

## LIST OF TABLES

TABLE NUMBER	TITLE OF TABLE	PAGE
9-1	U.S. EPA-Approved Monitoring Methods Used in Connecticut in 1997 .....	80
9-2	1997 SLAMS, NAMS and PAMS Sites in Connecticut .....	81
9-3	Summary of Probe Siting Criteria .....	84

## LIST OF FIGURES

FIGURE NUMBER	TITLE OF FIGURE	PAGE
1-1	Pollutant Standards Index .....	9
2-1	Location of Particulate Samplers .....	15
2-2	1997 Annual Average PM <sub>10</sub> Concentrations .....	19
2-3	Compliance with the Level of the Annual PM <sub>10</sub> Standards Using 95% Confidence Limits About the Annual Arithmetic Mean Concentration .....	21
2-4	1997 Maximum 24-Hour PM <sub>10</sub> Concentrations .....	23
2-5	Averages of the Annual PM <sub>10</sub> Concentrations .....	26
2-6	3-Year Averages of the Annual PM <sub>10</sub> Concentrations .....	26
3-1	Location of Continuous Sulfur Dioxide Instruments .....	30
3-2	1997 Maximum Calendar Day Average SO <sub>2</sub> Concentrations .....	34
3-3	1997 Maximum 3-Hour Running Average SO <sub>2</sub> Concentrations .....	37
3-4	Averages of the Annual SO <sub>2</sub> Concentrations at Six Sites .....	39
3-5	3-Year Averages of the Annual SO <sub>2</sub> Concentrations at Six Sites ...	39
4-1	Wind Rose for June-August 1996, Stafford 001 Monitoring Site, Shenipsit State Forest .....	47
4-2	Wind Rose for June-August 1997, Stafford 001 Monitoring Site, Shenipsit State Forest .....	48
4-3	Location of UV Photometric Ozone Instruments .....	49
4-4	1 <sup>st</sup> and 2 <sup>nd</sup> High 1-Hour Ozone Concentrations in 1997 .....	50
4-5	Averages of the Annual Mean Daily Maximum Ozone Concentrations at Ten Sites .....	51
4-6	5-Year Averages of the Annual Mean Daily Maximum Ozone Concentrations at Ten Sites .....	51
4-7	Location of PAMS Instruments .....	52

## LIST OF FIGURES

FIGURE NUMBER	TITLE OF FIGURE	PAGE
5-1	Location of Nitrogen Dioxide Instruments .....	56
5-2	Averages of the Annual NO <sub>2</sub> Concentrations at Three Sites .....	58
5-3	3-Year Averages of the Annual NO <sub>2</sub> Concentrations at Three Sites	58
6-1	Location of Carbon Monoxide Instruments .....	61
6-2	36-Month Running Averages of the Hourly CO Concentrations ...	65
7-1	Annual Wind Rose for 1996, Greenwich Point Park, Greenwich, Connecticut .....	69
7-2	Annual Wind Rose for 1997, Greenwich Point Park, Greenwich, Connecticut .....	70
7-3	Annual Wind Rose for 1996, Shenipsit State Forest, Stafford, Connecticut .....	71
7-4	Annual Wind Rose for 1997, Shenipsit State Forest, Stafford, Connecticut .....	72
8-1	Ozone Non-attainment Regions .....	74
8-2	CO Attainment / Non-attainment Regions .....	75
8-3	PM <sub>10</sub> Attainment / Non-attainment Regions .....	76



# I. INTRODUCTION

The 1997 Air Quality Summary of ambient air quality in Connecticut is a compilation of air pollutant measurements made at the official air monitoring network sites operated by the Department of Environmental Protection (DEP).

## A. OVERVIEW OF AIR POLLUTANT CONCENTRATIONS IN CONNECTICUT

The assessment of ambient air quality in Connecticut is made by comparing the measured concentrations of a pollutant to each of two Federal air quality standards. The first is the primary standard which is established to protect public health with an adequate margin of safety. The second is the secondary standard which is established to protect plants and animals and to prevent economic damage. The specific air quality standards are listed in Table 1-1 along with the time and data constraints imposed on each.

The following section briefly describes the status of Connecticut's air quality for the year 1997. More detailed discussions of each of the five pollutants are provided in subsequent sections of this Air Quality Summary.

### 1. PARTICULATE MATTER (PM<sub>10</sub>)

**Revision of the Particulate Matter Standard** - In 1971, the federal Environmental Protection Agency (EPA) promulgated primary and secondary national ambient air quality standards for particulate matter, measured as total suspended particulates or "TSP." The primary standards were set at 260  $\mu\text{g}/\text{m}^3$ , 24-hour average not to be exceeded more than once per year, and 75  $\mu\text{g}/\text{m}^3$ , annual geometric mean. The secondary standard was set at 150  $\mu\text{g}/\text{m}^3$ , 24-hour average not to be exceeded more than once per year. These standards were adopted by the state of Connecticut in 1972.

In accordance with sections 108 and 109 of the Clean Air Act, EPA reviewed and revised the health and welfare criteria upon which these primary and secondary particulate matter standards were based. EPA found that a size-specific indicator for primary standards representing small particles was warranted and that it should include particles of diameter less than or equal to a nominal 10 micrometers "cut point." Such a standard would place substantially greater emphasis on controlling small particles than does a TSP indicator, but would not completely exclude larger particles from all control.

On March 20, 1984, EPA proposed changes in the standards for particulate matter based on its review and revision of the health and welfare criteria. On July 1, 1987, EPA announced its final decisions regarding these changes. They include: (1) replacing TSP as the indicator for particulate matter for the ambient standards with a new indicator that includes only those particles with an aerodynamic diameter less than or equal to a nominal 10 micrometers (PM<sub>10</sub>); (2) replacing the 24-hour primary TSP standard with a 24-hour PM<sub>10</sub> standard of 150  $\mu\text{g}/\text{m}^3$  with no more than one expected exceedance per year; (3) replacing the annual primary TSP standard with a PM<sub>10</sub> standard of 50  $\mu\text{g}/\text{m}^3$ , expected annual arithmetic mean; and (4) replacing the secondary TSP standard with 24-hour and annual PM<sub>10</sub> standards that are identical in all respects to the primary standards. On July 7, 1993 the state of Connecticut adopted these new standards for particulate matter.

**Compliance Assessment** - Measured PM<sub>10</sub> concentrations during 1997 did not exceed the 50 µg/m<sup>3</sup> level of the primary and secondary annual standards or the 150 µg/m<sup>3</sup> level of the primary and secondary 24-hour standards at any site. Furthermore, the 24-hour standards were not violated because the "expected number of exceedances" for the most recent 3 years at each site did not exceed one per year. The annual standards were also not violated because the "expected annual mean" for the most recent 3 years at each site did not exceed 50 µg/m<sup>3</sup>.

## 2. SULFUR DIOXIDE (SO<sub>2</sub>)

**Compliance Assessment** - None of the air quality standards for sulfur dioxide were exceeded in Connecticut in 1997. Measured concentrations were below the 80 µg/m<sup>3</sup> primary annual standard, the 365 µg/m<sup>3</sup> primary 24-hour standard, and the 1300 µg/m<sup>3</sup> secondary 3-hour standard at all monitoring sites.

## 3. OZONE (O<sub>3</sub>)

**National Ambient Air Quality Standard (NAAQS)** - On February 8, 1979, the U.S. Environmental Protection Agency (EPA) established an ambient air quality standard for ozone of 0.12 ppm for a one-hour average. That level is not to be exceeded more than once per year. Furthermore, in order to determine compliance with the 0.12 ppm ozone standard, EPA directs the states to record the number of daily exceedances of 0.12 ppm at a given monitoring site over a consecutive 3-year period and then calculate the average number of daily exceedances for this interval. If the resulting average number of daily exceedances is less than or equal to 1.0, (that is, if the fourth highest daily value in a consecutive 3-year period is less than or equal to 0.12 ppm), the ozone standard is considered to be attained at that site. This standard replaces the old photochemical oxidant standard of 0.08 ppm. The definition of the pollutant was also changed, along with the numerical value of the standard, partly because the instruments used to measure photochemical oxidants in the air really measure only ozone. Ozone is one of a group of chemicals which are formed photochemically in the air and are called photochemical oxidants. In the past, the two terms have often been used interchangeably. This Air Quality Summary uses the term "ozone" in conjunction with the new NAAQS to reflect the changes in both the numerical value of the NAAQS and the definition of the pollutant.

**Compliance Assessment** - The primary 1-hour ozone standard was exceeded at eleven of the twelve DEP ozone monitoring sites in 1997 (see Table 1-2). Moreover, nonattainment of the standard remains a fact at nearly all the sites in 1997 because the average number of annual exceedances at each site was greater than one per year over the period 1995-1997. Only the Torrington 006 site, with an average number of exceedances of 0.33, was technically in compliance with the ozone standard.

## 4. NITROGEN DIOXIDE (NO<sub>2</sub>)

**Compliance Assessment** - The annual average NO<sub>2</sub> standard of 100 µg/m<sup>3</sup> was not exceeded at any site in Connecticut in 1997.

## 5. CARBON MONOXIDE (CO)

**Compliance Assessment** - The primary 8-hour standard of 9 ppm was not exceeded at any of the five carbon monoxide monitoring sites in Connecticut during 1997. In addition, there were no exceedances of the primary 1-hour standard of 35 ppm at any site.

## B. AIR MONITORING NETWORK

A computerized Air Monitoring Network consisting of an IBM System 7 computer and numerous telemetered monitoring sites was operated in Connecticut for several years. In 1985, this data acquisition system was modernized by installing new data loggers at the monitoring sites and replacing the dedicated IBM System 7 computer with a non-dedicated Data General Eclipse MV10000 computer, which was replaced in 1988 with a MV15000 model. This essentially improved both data accuracy and data capture. In April of 1996, the system was further upgraded with the purchase of state-of-the-art data loggers and PC-based charting software. In addition, the data polling functions performed by the Data General MV15000 were replaced with a primary polling and back-up system on DEC Pentium PCs.

As many as 14 measurement parameters are transmitted from a monitoring site via telephone lines to DEC PCs located in the DEP Hartford office and the DEP Windsor lab. The data are then compiled three times daily into 24-hour summaries. The telemetered sites are located in the towns of Bridgeport (3), Danbury, East Hartford (2), East Haven, Enfield, Greenwich, Groton (2), Hartford (3), Madison, Mansfield, Middletown, New Haven (2), Stafford, Stamford (2), Stratford, Torrington, Waterbury and Westport.

Continuously measured parameters include the pollutants sulfur dioxide, particulates (measured as PM<sub>10</sub>), carbon monoxide, nitric oxide, total nitrogen oxides, ozone and volatile organic compounds or VOC (June through August only). Meteorological data consists of wind speed and direction, temperature, precipitation, barometric pressure, solar radiation and dew point. Other parameters used for quality assurance and troubleshooting are room temperature, calibrator oven temperature, line voltage and air flow.

The real-time capabilities of the telemetry network have enabled the Air Monitoring Unit to report the Pollutant Standards Index for a number of towns on a daily basis while continuously keeping a close watch for high pollution levels which may occur during adverse weather conditions.

The complete monitoring network used in 1997 consisted of the following:

- 21 Particulate matter (PM<sub>10</sub>) hi-vol samplers
- 12 Sulfur dioxide analyzers
- 12 Ozone analyzers
- 3 Nitrogen dioxide analyzers
- 5 Carbon monoxide analyzers
- 3 Automated gas chromatographs for VOC

A complete description of all permanent air monitoring sites in Connecticut operated by DEP in 1997 is available from the Department of Environmental Protection, Bureau of Air Management, Monitoring and Radiation Division, 79 Elm Street, Hartford, Connecticut, 06106-5127.

## C. POLLUTANT STANDARDS INDEX

The Pollutant Standards Index (PSI) is a daily air quality index recommended for common use in state and local agencies by the U.S. Environmental Protection Agency. Starting on November 15, 1976, Connecticut began reporting the PSI on a 7-day basis, but is currently reporting the PSI on a 5-day basis

for most of the year (6-day during the ozone season) with predictions for the weekends. The PSI incorporates three pollutants : sulfur dioxide, PM<sub>10</sub> and ozone. The index converts each air pollutant concentration into a normalized number where the National Ambient Air Quality Standard for each pollutant corresponds to PSI = 100 and the Significant Harm Level corresponds to PSI = 500.

Figure 1-1 shows the breakdown of index values for the commonly reported pollutants (PM<sub>10</sub>, SO<sub>2</sub>, and O<sub>3</sub>) in Connecticut. For the winter of 1997, Connecticut reported the PM<sub>10</sub> PSI for the towns of Bridgeport, Burlington, Danbury, East Hartford, Enfield, Greenwich, Groton, Hartford, Meriden, Middletown, New Britain, New Haven, New London, Norwalk, Norwich, Stamford, Torrington, Voluntown, Wallingford, Waterbury and Willimantic; and reported the sulfur dioxide PSI for the towns of Bridgeport, Danbury, East Hartford, East Haven, Enfield, Greenwich, Groton, Hartford, Mansfield, New Haven, Stamford, and Waterbury. For the summer, the ozone PSI was reported for the towns of Bridgeport, Danbury, East Hartford, Greenwich, Groton, Madison, Middletown, New Haven, Stafford, Stratford, Torrington and Westport. Each day, the pollutant with the highest PSI value of all the pollutants being monitored is reported for each town, along with the dimensionless PSI number and a descriptor label to characterize the daily air quality. A descriptor label of each subsequent day's forecast is also included.

A telephone recording of the PSI is available each afternoon at approximately 3 PM, five days a week, and can be heard by dialing 424-4167. Predictions for weekends are included on the Friday recordings. For answers to specific questions, you can call a DEP representative at 424-3027 . The PSI information, as well as health effects information, is also available to the public during weekdays from the American Lung Association of Connecticut in East Hartford. The number there is 289-5401 or 1-800-992-2263.

#### **D. QUALITY ASSURANCE**

Quality Assurance requirements for State and Local Air Monitoring Stations (SLAMS), for National Air Monitoring Stations (NAMS), as part of the SLAMS network, and for Photochemical Assessment Monitoring (PAMS) are specified by the code of Federal Regulations, Title 40, Part 58, Appendix A.

The regulations were enacted to provide a consistent approach to Quality Assurance activities across the country so that ambient data with a defined precision and accuracy is produced.

A Quality Assurance program was initiated in Connecticut with written procedures covering, but not limited to, the following:

- Equipment procurement
- Equipment acceptance testing
- Equipment installation
- Equipment calibration
- Equipment operation
- Sample analysis
- Maintenance checks
- Performance audits
- Data handling
- Data quality assessment

Quality assurance procedures for the above activities were fully operational on January 1, 1981 for all NAMS monitoring sites. On January 1, 1983 the above procedures were fully operational for all SLAMS monitoring sites. Interim procedures have been in use for all PAMS monitoring sites since June of 1994, and are currently being refined.

Data precision and accuracy values are reported in the form of 95% probability limits as defined by equations found in Appendix A of the Federal regulations cited above.

## 1. PRECISION

Precision is a measure of data repeatability (grouping) and is determined as follows:

### a. Manual Samplers (PM<sub>10</sub>)

A second PM<sub>10</sub> hi-vol sampler is placed alongside the regular network sampler and operated concurrently. The concentration values from the collocated hi-vol sampler are compared to the network sampler and precision values are generated from the comparison.

### b. Automated Analyzers (SO<sub>2</sub>, O<sub>3</sub>, CO and NO<sub>2</sub>)

All NAMS and SLAMS analyzers are challenged with a low level pollutant concentration a minimum of once every two weeks: 8 to 10 ppm for CO and 0.08 to 0.10 ppm for SO<sub>2</sub>, O<sub>3</sub> and NO<sub>2</sub>. The comparison of analyzer response to input concentration is used to generate automated analyzer precision values.

### c. Automated Analyzers (VOC)

Analyzers are challenged with a low level calibration standard every fifty hours. The standard contains all fifty-five VOC target compounds in concentrations ranging from 2.5 to 6 parts per billion carbon (ppbc). The mean measured value for each compound is used as the target value from which precision estimates are generated.

## 2. ACCURACY

Accuracy is an estimate of the closeness of a measured value to a known value and is determined in the following manner:

### a. Manual Methods (PM<sub>10</sub>)

Accuracy for PM<sub>10</sub> is assessed by auditing the flow measurement phase of the sampling method. In Connecticut, this is accomplished by attaching a secondary standard calibrated orifice to the hi-vol inlet and comparing the measured flow rate to the design flow rate. A minimum of 25% of the PM<sub>10</sub> network samplers is audited each quarter.

### b. Automated Analyzers (SO<sub>2</sub>, O<sub>3</sub>, CO and NO<sub>2</sub>)

Automated analyzer data accuracy is determined by challenging each analyzer with three predetermined concentration levels (four for NO<sub>2</sub>). Each quarter, accuracy values are calculated for approximately 25% of the analyzers in a pollutant sampling network, at each concentration level. The results for each concentration of a particular pollutant are used to assess automated analyzer accuracy. The audit concentration levels are as follows:

**SO<sub>2</sub>, O<sub>3</sub>, and NO<sub>2</sub> (PPM)**

0.03 to 0.08  
0.15 to 0.20  
0.35 to 0.45

**CO (PPM)**

3 to 8  
15 to 20  
35 to 45

c. **Automated Analyzers (VOC)**

The accuracy of automated gas chromatographs used for VOC analysis is determined by analyzing "blind" audit samples supplied by EPA. Audit samples contain an unknown number of VOC at unspecified concentrations. Both the analysis results and the audit gas are sent back to EPA. EPA reanalyzes the audit gas (i.e., if sufficient quantity remains) to establish stability of the mixture, and returns audit results which highlight compounds outside expected accuracy levels (typically +/-35%).

**TABLE 1-1**  
**ASSESSMENT OF AMBIENT AIR QUALITY**

POLLUTANT	SAMPLING PERIOD	DATA REDUCTION	STATISTICAL BASE	AMBIENT AIR QUALITY STANDARDS			
				PRIMARY		SECONDARY	
				µg/m <sup>3</sup>	ppm	µg/m <sup>3</sup>	ppm
Particulates (PM <sub>10</sub> ) <sup>a</sup>	24 Hours (every sixth day)	24-Hour Average	Annual Arithmetic Mean <sup>b</sup>			50 <sup>c</sup>	
			24-Hour Average			150 <sup>d</sup>	
Sulfur Oxides (measured as sulfur dioxide)	Continuous	1-Hour Average	Annual Arithmetic Mean <sup>e</sup>		0.03		
			24-Hour Average <sup>e</sup>		0.14 <sup>f</sup>		
			3-Hour Average <sup>e</sup>			1300 <sup>f</sup>	0.5 <sup>f</sup>
Nitrogen Dioxide	Continuous	1-Hour Average	Annual Arithmetic Mean <sup>e</sup>	100	0.053	100	0.053
			1-Hour Average	235 <sup>g</sup>	0.12 <sup>g</sup>	235 <sup>g</sup>	0.12 <sup>g</sup>
Ozone	Continuous	Monthly Composite	Weighted 3-Month Average <sup>h</sup>	1.5		1.5	
			1-Hour Average	10 <sup>f,i</sup>	9 <sup>f</sup>	10 <sup>f,i</sup>	9 <sup>f</sup>
Lead	24 Hours (every sixth day)	1-Hour Average	8-Hour Average <sup>e</sup>			40 <sup>f,i</sup>	35 <sup>f</sup>
			1-Hour Average			40 <sup>f,i</sup>	35 <sup>f</sup>
Carbon Monoxide	Continuous	1-Hour Average	8-Hour Average <sup>e</sup>			10 <sup>f,i</sup>	9 <sup>f</sup>
			1-Hour Average			40 <sup>f,i</sup>	35 <sup>f</sup>


<sup>a</sup> Particulate matter with an aerodynamic diameter not greater than a nominal 10 micrometers.  
<sup>b</sup> EPA assessment criteria require 4 calendar quarters of data per year and at least 75% of the scheduled samples per calendar quarter in each of the most recent 3 years.  
<sup>c</sup> The "expected annual mean" for the most recent 3 years.  
<sup>d</sup> The "expected number of exceedances" per calendar year should be less than or equal to one, for the most recent 3 years.  
<sup>e</sup> EPA assessment criteria require at least 75% of the possible data to compute a valid average. For the annual mean, 9 months of data are required, and each calendar quarter must have at least 2 months of data. Furthermore, a valid month must have at least 21 days of data, and a valid day must have at least 18 hours of data.  
<sup>f</sup> Not to be exceeded more than once per year.  
<sup>g</sup> Daily maximum. The expected number of days that exceed the standard is not to average more than one per year in three years at a site.  
<sup>h</sup> State of Connecticut assessment criteria require at least 75% of the scheduled samples to compute a valid average.  
<sup>i</sup> Units are mg/m<sup>3</sup>, not µg/m<sup>3</sup>.

**TABLE 1-2**  
**AIR QUALITY STANDARDS EXCEEDED IN CONNECTICUT IN 1997**  
**BASED ON MEASURED CONCENTRATIONS**

TOWN	SITE	OZONE	
		Level Exceeding 1-Hour Standard (0.12 PPM)	Highest Observed Level (ppm)
Bridgeport	013	0.135	2
Danbury	123	0.140	4
East Hartford	003	0.161	2
Greenwich	017	0.162	3
Groton	008	0.183	4
Madison	002	0.163	6
Middletown	007	0.178	2
New Haven	123	0.157	2
Stafford	001	0.166	2
Stratford	007	0.187	6
Westport	003	0.166	6

# FIGURE 1-1

## POLLUTANT STANDARDS INDEX

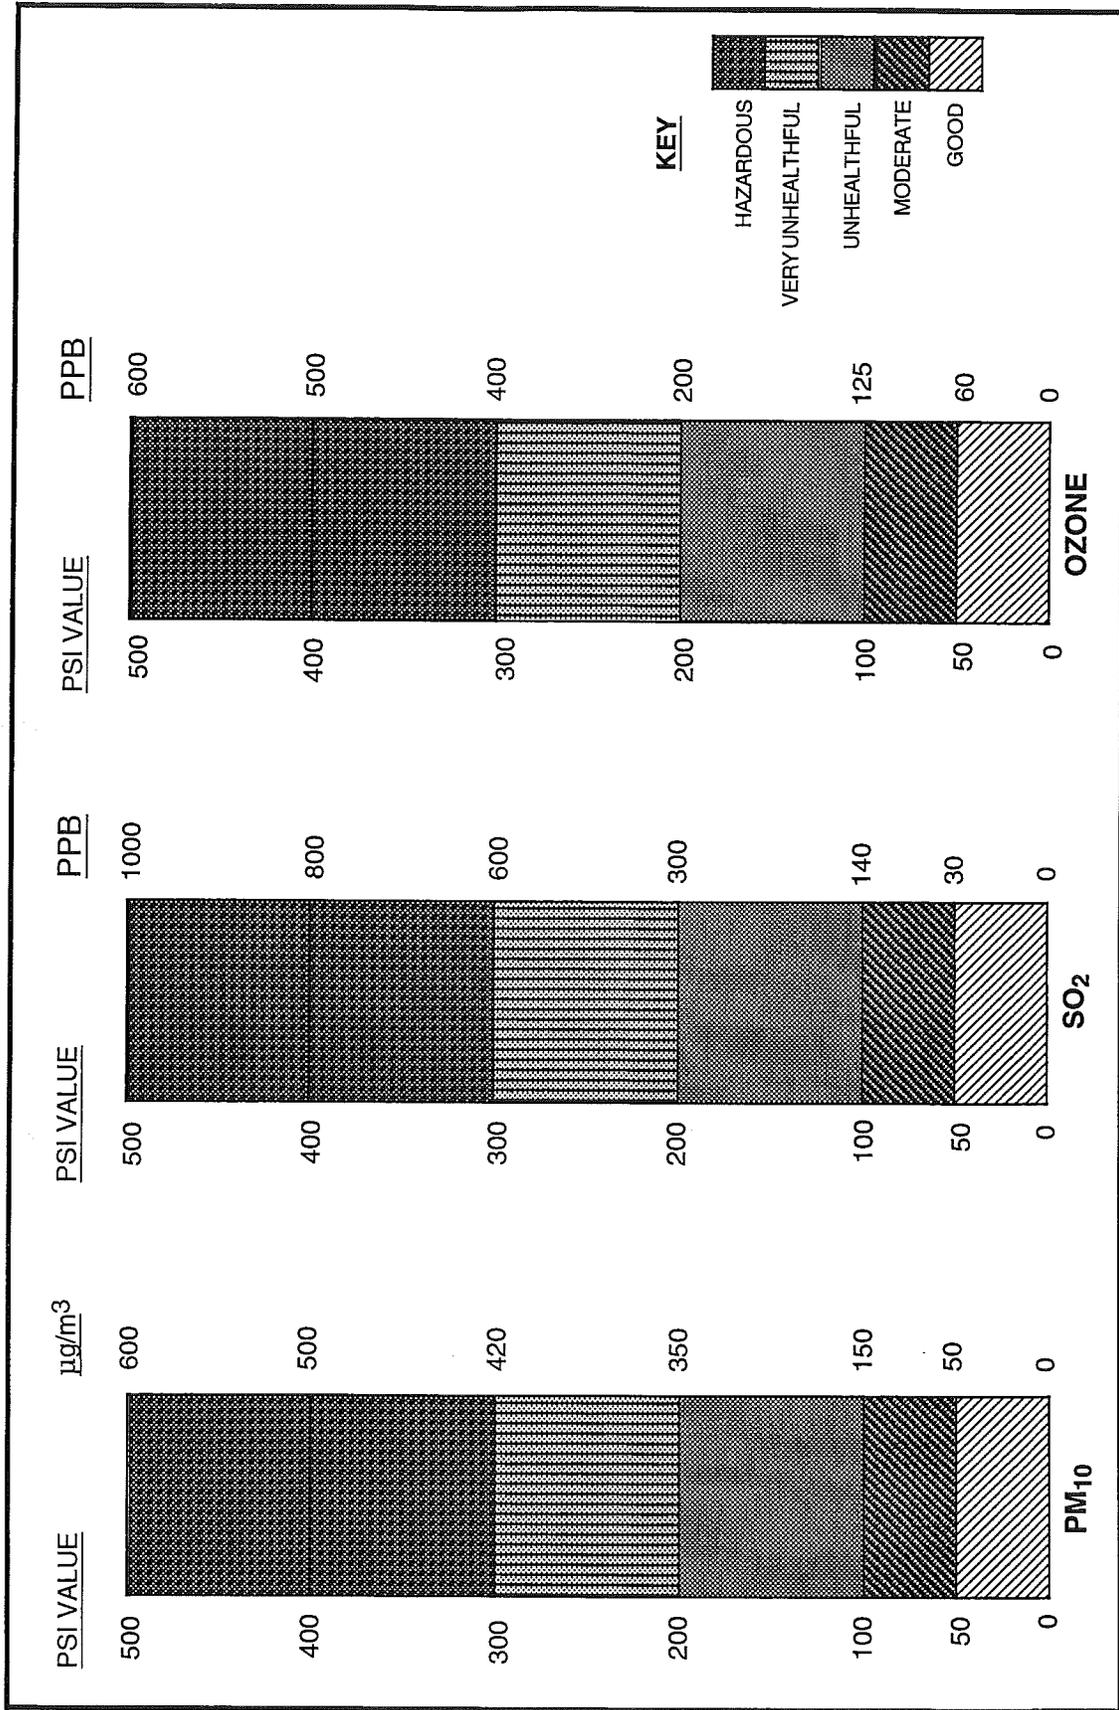

## II. PARTICULATE MATTER

### HEALTH EFFECTS

Particulate matter is the generic term for a broad class of chemically and physically diverse substances that exist as discrete particles (liquid droplets or solids) over a wide range of sizes. Particles originate from a variety of stationary and mobile sources. They may be emitted directly or formed in the atmosphere by transformations of gaseous emissions such as sulfur oxides, nitrogen oxides, and volatile organic substances. The chemical and physical properties of particulate matter vary greatly with time, region, meteorology and source category.

The major effects associated with high exposures to particulate matter include reduced lung function; interference with respiratory mechanics; aggravation or potentiation of existing respiratory and cardiovascular disease, such as chronic bronchitis and emphysema; increased susceptibility to infection; interference with clearance and other host defense mechanisms; damage to lung tissues; carcinogenesis and mortality.

Harm may also occur in the form of changes in the human body caused by chemical reactions with pollution particles that pass through the lung membranes to poison the blood or be carried by the blood to other organs. This can happen with inhaled lead, cadmium, beryllium, and other metals, and with certain complex organic compounds that can cause cancer.

Population subgroups that appear likely to be most sensitive to the effects of particulate matter include individuals with chronic obstructive pulmonary or cardiovascular disease, individuals with influenza, asthmatics, the elderly, children, smokers, and mouth or oronasal breathers.

### REVISION OF THE PARTICULATE MATTER STANDARD

In 1971, the federal Environmental Protection Agency (EPA) promulgated primary and secondary national ambient air quality standards for particulate matter, measured as total suspended particulates or "TSP." The primary standards were set at 260  $\mu\text{g}/\text{m}^3$ , 24-hour average not to be exceeded more than once per year, and 75  $\mu\text{g}/\text{m}^3$ , annual geometric mean. The secondary standard, also measured as TSP, was set at 150  $\mu\text{g}/\text{m}^3$ , 24-hour average not to be exceeded more than once per year. These standards were adopted by the state of Connecticut in 1972. In accordance with sections 108 and 109 of the Clean Air Act, EPA has reviewed and revised the health and welfare criteria upon which these primary and secondary particulate matter standards were based.

The TSP standard directs control efforts towards particles of lower risk to health because of its inclusion of large particles which can dominate the measured mass concentration, but which are deposited only in the extrathoracic region. Smaller particles penetrate furthest in the respiratory tract, settling in the tracheobronchial region and in the deepest portion of the lung, the alveolar region. Available evidence demonstrates that the risk of adverse health effects associated with deposition of typical ambient fine and coarse particles in the thorax are markedly greater than those associated with deposition in the extrathoracic region. EPA found that a size-specific indicator for primary standards representing small particles was warranted and that it should include particles of diameter less than or equal to a nominal 10 micrometers "cut point." Such a standard places substantially greater emphasis on controlling smaller particles than does a TSP indicator, but doesn't completely exclude larger particles from all control.

On March 20, 1984, EPA proposed changes in the standards for particulate matter based on its review and revision of the health and welfare criteria. On July 1, 1987, EPA announced its final decisions regarding these changes. They include: (1) replacing TSP as the indicator for particulate matter for the ambient standards with a new indicator that includes only those particles with an aerodynamic diameter less than or equal to a nominal 10 micrometers (PM<sub>10</sub>); (2) replacing the 24-hour primary TSP standard with a 24-hour PM<sub>10</sub> standard of 150 µg/m<sup>3</sup> with no more than one expected exceedance per year; (3) replacing the annual primary TSP standard with a PM<sub>10</sub> standard of 50 µg/m<sup>3</sup>, expected annual arithmetic mean; and (4) replacing the secondary TSP standard with 24-hour and annual PM<sub>10</sub> standards that are identical in all respects to the primary standards. The federal standards became effective on July 31, 1987. On July 7, 1993, the state of Connecticut adopted these new standards for particulate matter.

## **CONCLUSIONS**

Measured PM<sub>10</sub> concentrations during 1997 did not exceed the 50 µg/m<sup>3</sup> level of the primary and secondary annual standards or the 150 µg/m<sup>3</sup> level of the primary and secondary 24-hour standards at any site. Moreover, the 24-hour standards were not violated because the "expected number of exceedances" for the most recent 3 years at each site did not exceed one per year, and the annual standards were also not violated anywhere because the "expected annual mean" for the most recent 3 years at each site did not exceed 50 µg/m<sup>3</sup>.

## **SAMPLE COLLECTION AND ANALYSIS**

**High Volume Sampler (Hi-vol)** - The high volume sampler resembles a vacuum cleaner in its operation, with an 8" X 10" piece of fiberglass filter paper replacing the vacuum bag. Hi-vols are equipped with retractable lids in order to eliminate the passive sampling error. The sampler normally operates every sixth day (midnight to midnight, standard time).

The matter collected on the filters is analyzed for weight in the case of the PM<sub>10</sub> samplers and for both weight and chemical composition in the case of the hi-vol samplers. The chemical composition of the suspended particulate matter is determined at each hi-vol site as follows. Two standardized strips of every filter are cut out and prepared for two different analyses. In the first analysis, a sample is digested in acid and the resulting solution is analyzed for metals by means of an atomic absorption spectrophotometer. The results are reported for each individual metal in µg/m<sup>3</sup>. In the second analysis, a sample is dissolved in water, filtered and the resulting solution is analyzed by means of wet chemistry techniques to determine the concentration of certain water soluble components. The results are reported for each individual constituent of the water soluble fraction in µg/m<sup>3</sup>.

**PM<sub>10</sub> Sampler** - Before 1988, Connecticut's particulate sampling network was comprised of standard high-volume (hi-vol) samplers, whose function was to measure TSP. With the promulgation of a PM<sub>10</sub> standard, hi-vol samplers were needed that could screen out most particles larger than 10 microns. The samplers also had to be omnidirectional and have a constant inlet velocity so that wind direction and speed would not affect the amount of material collected.

In anticipation of a PM<sub>10</sub> standard being promulgated, Connecticut installed a small number of PM<sub>10</sub> samplers in 1985. The samplers, manufactured by Sierra-Andersen, were the first PM<sub>10</sub> samplers on the market. These early samplers were found to have relatively high maintenance requirements and to be biased towards particles larger than 10 microns. To remedy these problems, the samplers were physically modified after 1986. In 1987, PM<sub>10</sub> samplers by Wedding & Associates came on the market. These samplers replaced the Andersen samplers in the sampling network in 1988. The Wedding samplers have demonstrated lower maintenance requirements and greater precision (repeatability) and accuracy than the Andersen samplers they replaced.

The PM<sub>10</sub> samplers, like the standard hi-vol samplers, operate from midnight to midnight (standard time) at least every sixth day at all sites. However, PM<sub>10</sub> samplers use quartz fiber filters instead of fiberglass filters, in order to eliminate sulfate artifact formation. And the matter collected on the filter is analyzed only for weight and sulfates at the present time. The air flow is recorded during sampling. The weight in micrograms (µg) divided by the volume of air in standard cubic meters (m<sup>3</sup>) yields the concentration of PM<sub>10</sub> for the day in micrograms per cubic meter.

**TEOM Sampler** - Connecticut also operates real-time PM<sub>10</sub> monitors that employ tapered element oscillating microbalance (TEOM) technology. The TEOM technique utilizes an exchangeable filter cartridge on the end of a hollow tapered tube. The other (wider) end of the tube is fixed. Air is passed through the filter, on which particulate matter deposits, and the filtered air passes through the tapered tube to a flow controller.

The tapered tube is maintained in oscillation. The frequency of oscillation is dependent upon the physical characteristics of the tapered tube and the mass on its free end. As particulate matter lands on the filter, the filter mass change is detected as a frequency change in the oscillation of the tube. The mass of the particulate matter is then determined directly and inertially. When this mass change is combined with the flow rate through the system, the device yields an accurate measurement of the particulate concentration in real time.

Such a continuous particulate monitoring system has advantages over manual systems like the hi-vol. Not only does TEOM technology provide more detailed information than a 24-hour average, but it also reduces the amount of labor required for these measurements, since the filter handling procedures are significantly reduced.

## **DISCUSSION OF DATA**

**Monitoring Network** - In 1997, the Connecticut DEP operated 21 sampling sites for PM<sub>10</sub> in the state (see Figure 2-1).

**Precision and Accuracy** - Precision checks were conducted at three PM<sub>10</sub> sampling sites which had co-located samplers. On the basis of 176 precision checks, the 95% probability limits for precision ranged from -7% to +7%. Accuracy is based on air flow through the monitor. The 95% probability limits for accuracy, based on 21 audits conducted on the PM<sub>10</sub> monitoring system network, ranged from -3% to +9%. (See section I.D. of this Air Quality Summary for a discussion of precision and accuracy.)

**Annual Averages** - The Federal EPA has established minimum sampling criteria (see Table 1-1) for use in determining compliance with the primary and secondary annual NAAQS for PM<sub>10</sub>. A site must have 75% of the scheduled samples in each calendar quarter for the the most recent 3 years. Using the EPA criteria, one finds that a determination of attainment or nonattainment of the 50 µg/m<sup>3</sup> primary and secondary annual standards could be obtained at 14 of the 21 PM<sub>10</sub> monitoring sites in Connecticut in 1997. These 14 sites proved to be in attainment of the annual standards. A determination of attainment or nonattainment could not be obtained at Bridgeport, Danbury, Darien, Middletown, New Haven 018, New Haven 020, and Waterbury, where there were insufficient data at each site in at least one calendar quarter during the most recent three years. Nevertheless, given the 95 percent confidence limits about the annual mean at these sites (see Table 2-1), it is likely that attainment was achieved.

A summary of annual average PM<sub>10</sub> data for 1995 -1997 is presented in Table 2-1. This table also includes an indication of whether the aforementioned EPA minimum sampling criteria were met at each site for each year. If the sampling was insufficient to meet the EPA criteria, an asterisk appears next to the number of samples. Figure 2-2 illustrates the annual average PM<sub>10</sub> concentrations at each site in 1997.

**Statistical Projections** - The statistical projections presented in Table 2-1 are prepared by a DEP computer program which analyzes data from all sites operated by DEP. Inputs to the program include the site location, the year, the number of samples (usually a maximum of 61), the annual arithmetic and geometric mean concentrations, and the arithmetic and geometric standard deviations. For each site, the program lists the inputs, calculates the 95% confidence limits about the annual arithmetic mean, and predicts the number of days in each year that the level of the primary and secondary 24-hour standards (i.e., 150  $\mu\text{g}/\text{m}^3$ ) would have been exceeded if sampling had been conducted every day. For comparison, Table 2-1 also shows the number of days, if any, at each site when the level of the primary and secondary 24-hour standards was actually exceeded, as demonstrated by actual measurements at the site.

The statistical predictions of the number of days that would have seen an exceedance of the level of the 24-hour standards are based on the assumption of a lognormal distribution of the data. They indicate that more frequent  $\text{PM}_{10}$  sampling from 1995 to 1997 would not have resulted in an exceedance of the 24-hour standards.

Because manpower and economic limitations dictate that  $\text{PM}_{10}$  sampling for particulate matter cannot be conducted every day, a degree of uncertainty is introduced as to whether the air quality at a site has either met or exceeded the level of the annual standards. This uncertainty can be expressed by means of a statistic called a confidence limit. Assuming a normal distribution of the pollutant data, 95% confidence limits were calculated about the annual arithmetic mean at each site. For example (see Table 2-1), at East Hartford in 1997, 59 samples were analyzed and an arithmetic mean of 20.8  $\mu\text{g}/\text{m}^3$  was then calculated. The columns labeled "95-PCT-LIMITS" show the lower and upper limits of the 95% confidence interval to be 18.4 and 23.3  $\mu\text{g}/\text{m}^3$ , respectively. This means that, if sampling were done every day, there is a 95% chance that the true arithmetic mean would fall between these limits. Since the upper 95% limit is less than 50  $\mu\text{g}/\text{m}^3$ , one can be confident that the level of the annual standards was not exceeded at the site. However, if the upper 95% limit were greater than and the lower 95% limit were less than 50  $\mu\text{g}/\text{m}^3$ , then one could not be confident that the standard was not exceeded at the site. And if both the upper and lower 95% limits were greater than 50  $\mu\text{g}/\text{m}^3$ , then one could assume that the level of the standards was indeed exceeded sometime during the year. These three possibilities are illustrated in Figure 2-3.

Table 2-2 summarizes the statistical predictions from Table 2-1 regarding compliance with the level of the annual air quality standards, using the 95% confidence limit criteria. The table shows that the level of the primary and secondary annual standards was probably achieved at the 19 sites that met the minimum sampling criteria in 1997. The results for previous years are also tabulated.

It should be noted that the above discussion of statistical projections does not affect the actual determination of attainment or nonattainment of the  $\text{PM}_{10}$  standards. The promulgated regulations specify the requirements for making an attainment determination. Those requirements, mentioned in a limited way in Table 1-1, address the projection of exceedances and the calculation and use of arithmetic means in ways that are different from the foregoing discussion.

**24-Hour Averages** - Figure 2-4 presents the maximum 24-hour concentrations recorded at each site. There were no  $\text{PM}_{10}$  concentrations at any site that exceeded the 150  $\mu\text{g}/\text{m}^3$  level of the primary and secondary 24-hour standards in 1997. Of the 16 sites that had sufficient data in both 1996 and 1997, 15 sites had lower maximum concentrations and 1 site had a higher maximum concentration. The largest decrease was 20  $\mu\text{g}/\text{m}^3$  at Waterbury and Willimantic; the one increase was 35  $\mu\text{g}/\text{m}^3$  at Greenwich.

Table 2-3 summarizes the statistical predictions from Table 2-1 regarding the number of sites that would have seen  $\text{PM}_{10}$  concentrations exceeding the level of the 24-hour standards, if sampling had been conducted every day. In 1997, there were no such sites. The results for the preceding years are also given. In all cases, results are presented only for those sites that met the minimum sampling criteria for the year.

A determination of actual compliance with the primary and secondary 24-hour standards can be made for a site only when the minimum sampling criteria are met in each calendar quarter for the most recent 3 years. Based on these criteria, compliance was achieved at 14 of the 21 sites in 1997. A determination of compliance could not be made for the 7 sites mentioned earlier because there were insufficient data at each site in at least one calendar quarter during the most recent three years. But based upon the data that is available, it is highly improbable that an exceedance would have occurred at any of these sites.

**Highest Daily Concentrations and Wind Data** - On a statewide and historical basis, the highest PM<sub>10</sub> concentrations occur most often on days when persistent winds out of the southwest quadrant predominate. During the fifteen year period between 1981 and 1995, 45% of the annual ten highest daily concentrations of particulate matter at each monitoring site in the state occurred when such wind conditions prevailed. This relationship between southwest quadrant winds and high particulate levels has historically been more prevalent in southwestern Connecticut.

Notwithstanding the above, many of the maximum levels at some urban sites do not occur with southwest quadrant winds, indicating that these sites are possibly influenced by local sources or transport from different out-of-state sources. Also, a large scale southwesterly air flow is often diverted into a southerly flow up the Connecticut River Valley and, for sites located there, many of the highest PM<sub>10</sub> days occur when the winds are from the south.

**Trends** - Pollutant trends can be illustrated in a number of ways. It is desirable to portray a PM<sub>10</sub> trend that is both statewide in nature and relevant to one of the ambient air quality standards. This can be accomplished by averaging the annual mean PM<sub>10</sub> concentrations at a number of monitoring sites for each year of a period of years. This is done in Figure 2-5 for nine monitoring sites from 1989, the first full year of PM<sub>10</sub> monitoring. Nine monitoring sites were used because only nine sites met the minimum sampling criteria in each year of the period. Figure 2-5 shows that, in spite of the year-to-year variation, statewide PM<sub>10</sub> levels appear to be trending downward.

Significant changes in annual PM<sub>10</sub> levels can be caused by a number of things. Among these are simple changes of weather; changes in annual fuel use associated with conservation efforts or heating demand; the frequency of precipitation events, which wash out particulates from the atmosphere; changes in average wind speed, since higher winds result in greater dilution of emissions; and a change in the frequency of southwest quadrant winds, which affect the amount of particulate matter transported into Connecticut from the New York City metropolitan area and from other sources of emissions located west to south of the state. In illustrating a trend, these year-to-year effects can be diminished, if not eliminated, by using a moving average of three years or more. Figure 2-6 illustrates the trend of PM<sub>10</sub> using a 3-year moving average. The trend is clearly down.



TABLE 2-1  
1995-1997 PM10 ANNUAL AVERAGES AND STATISTICAL PROJECTIONS

TOWN NAME	SITE	YEAR	SAMPLES	ARITHMETIC MEAN	95-PCT-LIMITS LOWER	UPPER	STANDARD DEVIATION	PREDICTED DAYS OVER 150 UG/M3	MEASURED DAYS OVER 150 UG/M3
BRIDGEPORT	010	1995	57	21.9	18.7	25.1	13.029		
	010	1996	59	20.6	18.4	22.8	9.272		
	010	1997	54*	21.5	18.8	24.2	10.820		
BRIDGEPORT	014	1995	59	28.7	25.4	32.0	13.938		
	014	1996	60	26.8	24.2	29.3	11.003		
BRISTOL	001	1995	58	16.1	13.7	18.4	9.737		
BURLINGTON	001	1995	56	12.1	10.1	14.2	8.215		
	001	1996	58	12.4	10.4	14.4	8.160		
	001	1997	58	13.7	11.7	15.7	8.188		
DANBURY	123	1995	56*	22.0	19.2	24.8	11.403		
	123	1996	51*	21.7	19.3	24.2	9.381		
	123	1997	60	21.2	18.8	23.6	10.189		
DARIEN	001	1995	58	24.1	21.0	27.2	12.914		
	001	1996	56*	23.2	20.6	25.7	10.365		
	001	1997	59	25.9	23.4	28.4	10.397		
EAST HARTFORD	004	1995	59	18.1	15.6	20.6	10.497		
	004	1996	60	20.0	17.7	22.4	9.988		
	004	1997	59	20.8	18.4	23.3	10.150		
ENFIELD	005	1995	60	13.9	11.8	16.0	8.893		
	005	1996	58	15.9	13.6	18.3	9.897		
	005	1997	59	16.2	14.1	18.3	8.857		
GREENWICH	017	1995	57	17.9	15.6	20.1	9.183		
	017	1996	57	18.0	15.8	20.2	9.071		
	017	1997	61	19.9	16.7	23.1	13.660		
GROTON	006	1995	57	16.8	14.2	19.3	10.317		

\* THE NUMBER OF SAMPLES IS NOT SUFFICIENT TO COMPLY WITH THE MINIMUM SAMPLING CRITERIA.

TABLE 2-1, CONTINUED  
 1995-1997 PM10 ANNUAL AVERAGES AND STATISTICAL PROJECTIONS

TOWN NAME	SITE	YEAR	SAMPLES	ARITHMETIC 95-PCT-LIMITS		STANDARD DEVIATION	PREDICTED DAYS OVER 150 UG/M3	MEASURED DAYS OVER 150 UG/M3
				MEAN	UPPER			
HARTFORD	013	1995	59	16.5	18.8	9.762		
	013	1996	59	17.2	19.4	9.004		
	013	1997	61	18.9	21.2	9.977		
HARTFORD	015	1995	56	20.2	22.9	11.023		
	015	1996	60	21.3	23.7	10.526		
	015	1997	59	22.4	25.0	10.775		
MERIDEN	002	1995	59	18.4	20.8	10.351		
MIDDLETOWN	003	1995	55*	17.7	20.3	10.458		
MIDDLETOWN	003	1996	59	17.7	20.0	9.619		
MIDDLETOWN	003	1997	58	18.5	20.8	9.257		
MILFORD	010	1995	58	17.0	19.4	9.879		
NEW BRITAIN	012	1995	14*	17.6	23.1	9.626		
NEW HAVEN	013	1995	57	20.4	23.2	11.506		
NEW HAVEN	018	1995	58	31.5	35.5	16.707		
NEW HAVEN	018	1996	58	28.2	31.1	11.963		
NEW HAVEN	018	1997	54*	29.1	31.8	11.046		
NEW HAVEN	020	1995	61	22.8	25.6	11.683		
NEW HAVEN	020	1996	50*	21.0	23.8	10.647		
NEW HAVEN	020	1997	61	21.7	23.8	9.093		
NEW HAVEN	123	1995	60	21.9	24.8	12.450		
NEW HAVEN	123	1996	61	20.6	22.8	9.792		
NEW HAVEN	123	1997	61	21.2	23.5	9.588		
NEW LONDON	004	1995	57	16.7	19.0	9.089		
NEW LONDON	004	1996	58	18.3	20.8	10.274		
NEW LONDON	004	1997	54	17.9	20.4	10.047		

\* THE NUMBER OF SAMPLES IS NOT SUFFICIENT TO COMPLY WITH THE MINIMUM SAMPLING CRITERIA.


TABLE 2-1, CONTINUED  
 1995-1997 PM10 ANNUAL AVERAGES AND STATISTICAL PROJECTIONS

TOWN NAME	SITE	YEAR	SAMPLES	ARITHMETIC 95-PCT-LIMITS		STANDARD DEVIATION	PREDICTED DAYS OVER 150 UG/M3	MEASURED DAYS OVER 150 UG/M3
				MEAN	LOWER UPPER			
NORWALK	014	1995	56	32.2	28.3 36.1	15.707		
NORWALK	014	1996	58	32.5	29.4 35.6	12.789		
NORWALK	014	1997	59	31.4	28.6 34.2	11.838		
NORWICH	002	1995	58	17.6	15.2 20.0	10.128		
NORWICH	002	1996	59	19.1	16.3 21.8	11.457		
NORWICH	002	1997	56	18.9	16.6 21.2	9.251		
STAMFORD	001	1995	59	20.8	18.4 23.3	10.412		
TORRINGTON	001	1995	60	17.2	15.0 19.4	9.248		
TORRINGTON	001	1996	59	18.1	15.7 20.5	9.955		
TORRINGTON	001	1997	57	18.4	16.4 20.4	8.186		
VOLUNTOWN	001	1995	56	12.6	10.4 14.9	9.153		
VOLUNTOWN	001	1996	54	14.4	11.8 17.1	10.561		
VOLUNTOWN	001	1997	59	15.4	12.8 18.0	10.886		
WALLINGFORD	006	1995	59	16.9	14.6 19.3	9.860		
WALLINGFORD	006	1996	61	17.2	14.9 19.4	9.645		
WALLINGFORD	006	1997	60	18.2	15.8 20.5	9.774		
WATERBURY	007	1995	58	22.3	19.0 25.5	13.474		
WATERBURY	123	1995	52*	23.8	20.4 27.1	12.990		
WATERBURY	123	1996	61	25.4	22.3 28.5	13.250		
WATERBURY	123	1997	58	23.3	21.0 25.5	9.419		
WILLIMANTIC	002	1995	57	15.3	13.3 17.3	8.264		
WILLIMANTIC	002	1996	60	17.8	15.5 20.0	9.493		
WILLIMANTIC	002	1997	59	17.4	15.4 19.4	8.429		

\* THE NUMBER OF SAMPLES IS NOT SUFFICIENT TO COMPLY WITH THE MINIMUM SAMPLING CRITERIA.

## FIGURE 2-2


### 1997 ANNUAL AVERAGE PM10 CONCENTRATIONS

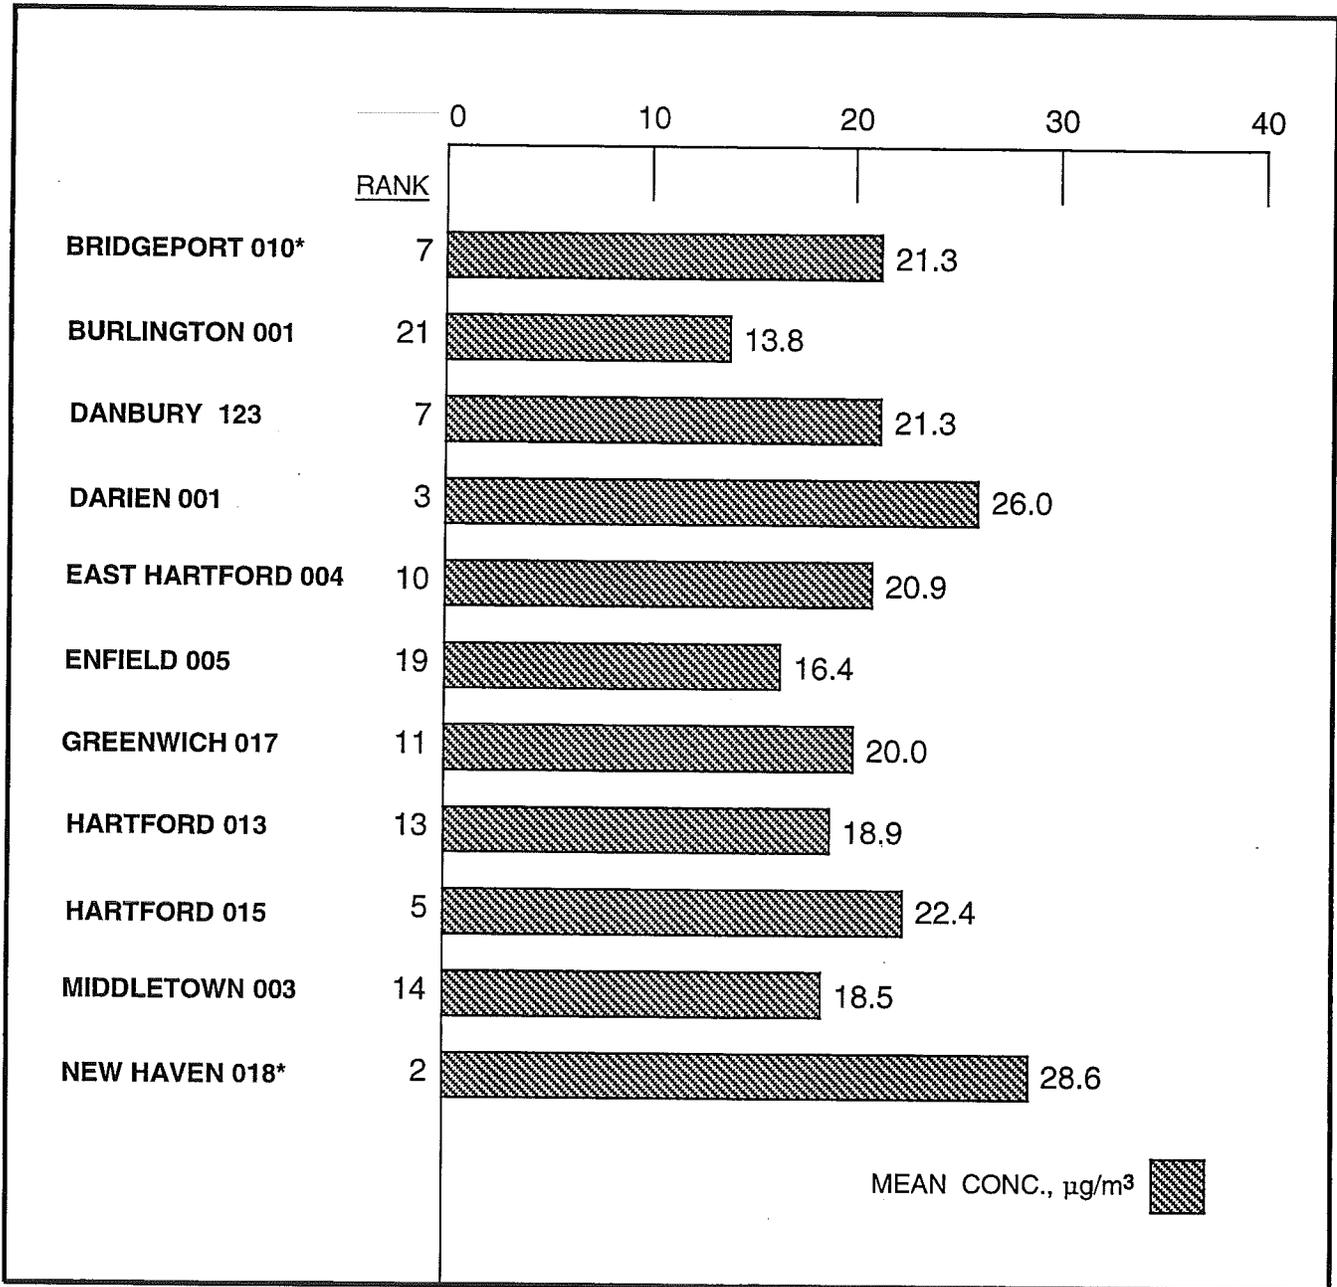

\* The site has insufficient data to satisfy the minimum sampling criteria for the year.


## FIGURE 2-2, continued

### 1997 ANNUAL AVERAGE PM10 CONCENTRATIONS

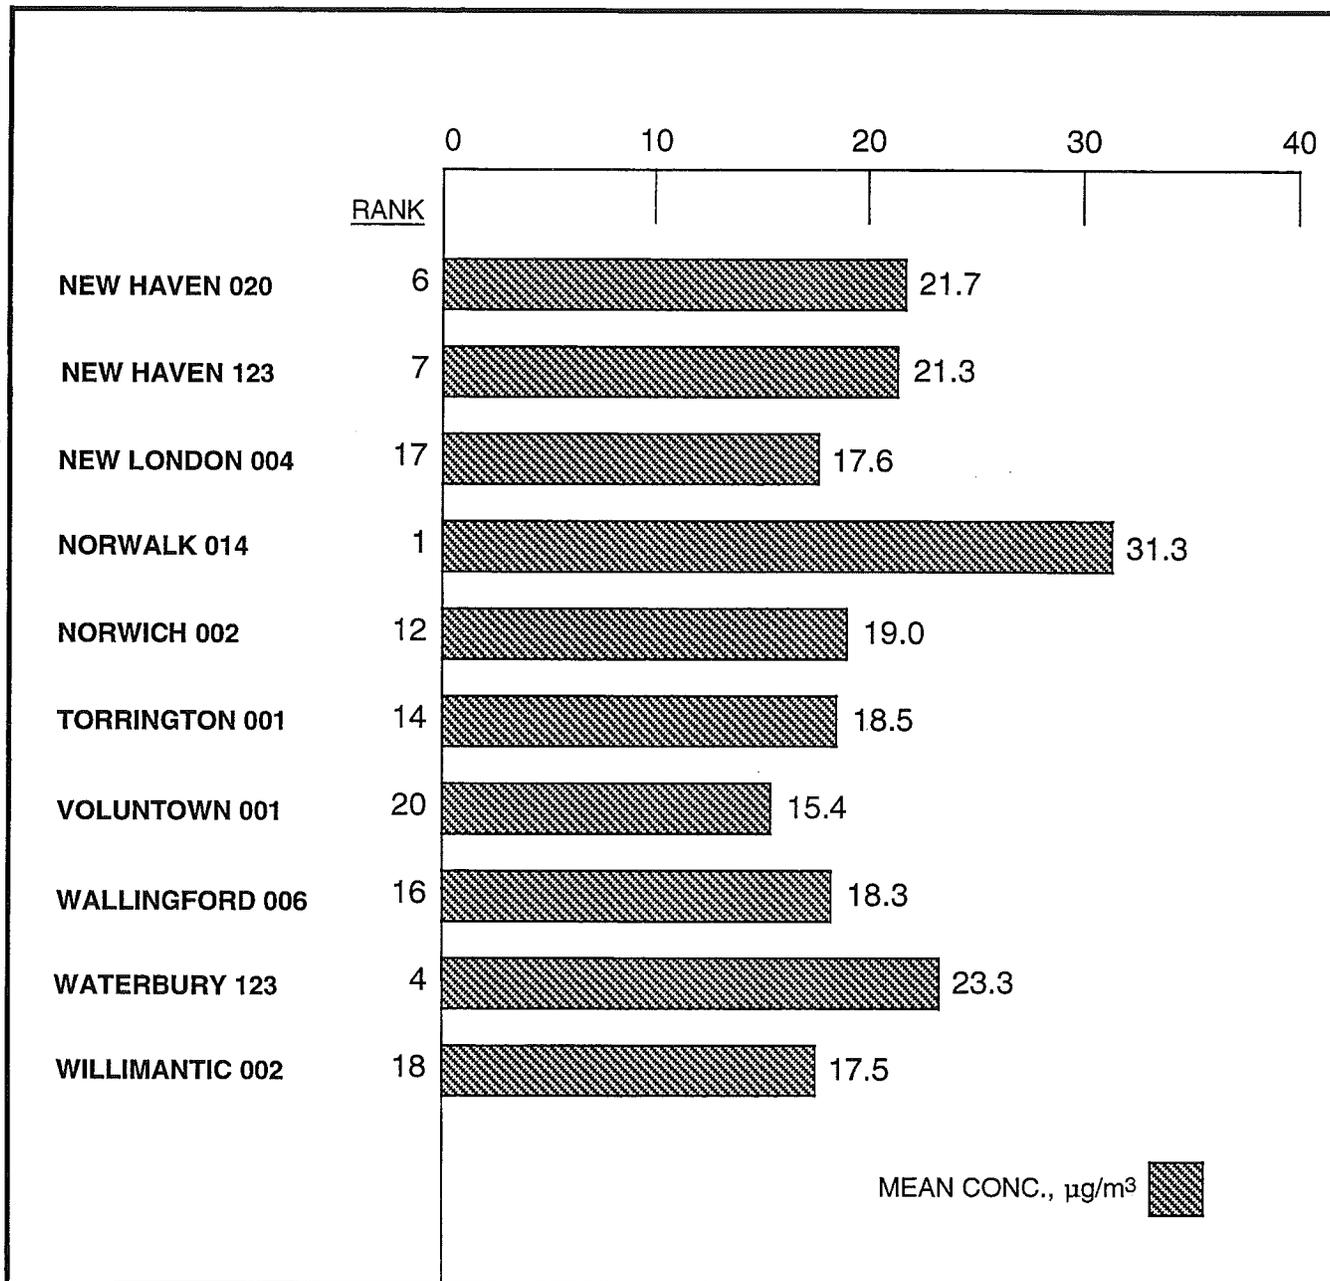

## FIGURE 2-3

### COMPLIANCE WITH THE LEVEL OF THE ANNUAL PM<sub>10</sub> STANDARDS USING 95% CONFIDENCE LIMITS ABOUT THE ANNUAL ARITHMETIC MEAN CONCENTRATION

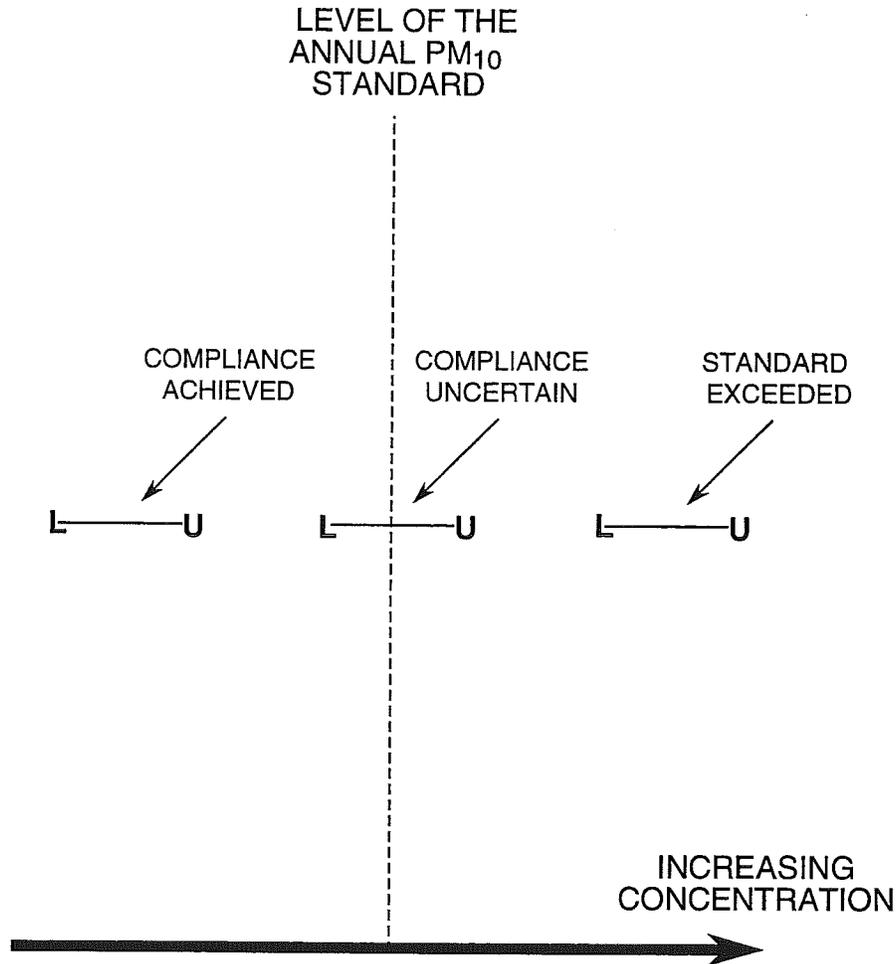

L=The lower limit of the 95% confidence interval about the annual arithmetic mean concentration.

U=The upper limit of the 95% confidence interval about the annual arithmetic mean concentration.

**TABLE 2-2**


**STATISTICALLY PREDICTED NUMBER OF SITES**  
**IN COMPLIANCE WITH THE LEVEL OF THE**  
**ANNUAL PM10 STANDARDS\***

	<b>COMPLIANCE ACHIEVED</b>	<b>COMPLIANCE UNCERTAIN</b>	<b>STANDARD EXCEEDED</b>
1985	2	0	0
1986	4	0	1
1987	4	0	1
1988	3	0	0
1989	40	0	0
1990	39	0	0
1991	30	0	0
1992	28	0	0
1993	23	0	0
1994	26	0	0
1995	26	0	0
1996	19	0	0
1997	19	0	0

\* Using 95% confidence limits about the arithmetic mean concentration at only those sites which had sufficient data to satisfy the minimum sampling criteria for the year.

# FIGURE 2-4

## 1997 MAXIMUM 24-HOUR PM10 CONCENTRATIONS

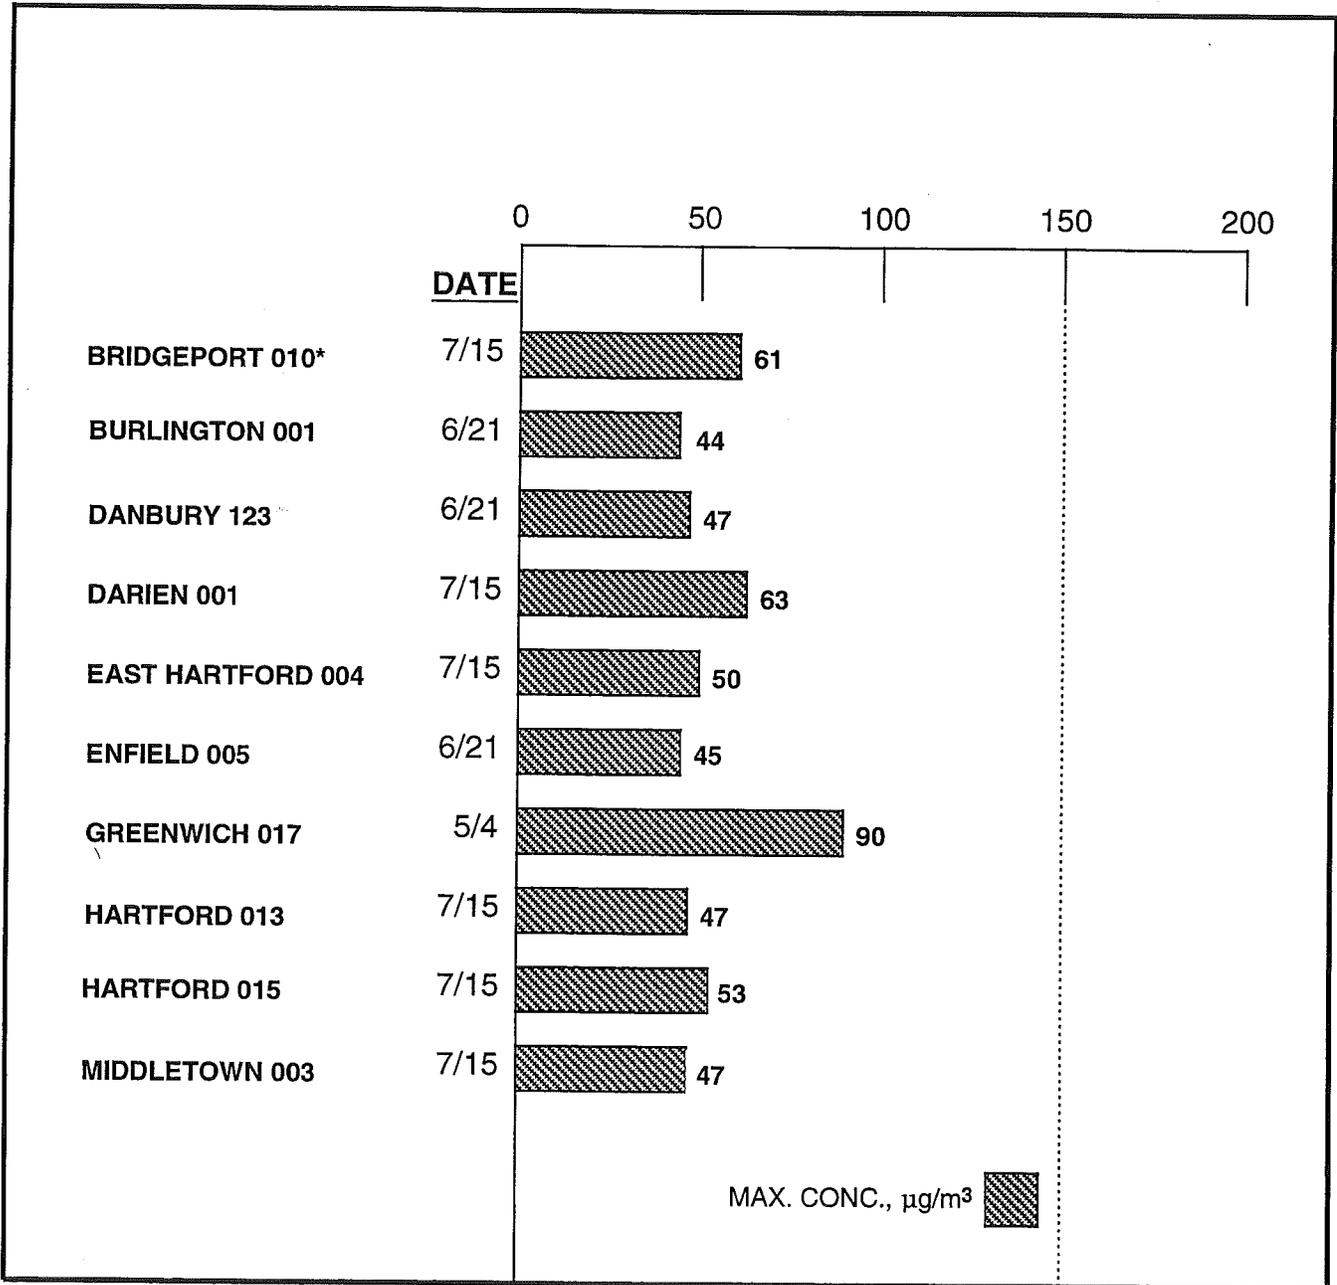


150  $\mu\text{g}/\text{m}^3$   
24 - HOUR  
STANDARD

\* The site has insufficient data to satisfy the minimum sampling criteria for the year.

## FIGURE 2-4, continued

### 1997 MAXIMUM 24-HOUR PM<sub>10</sub> CONCENTRATIONS

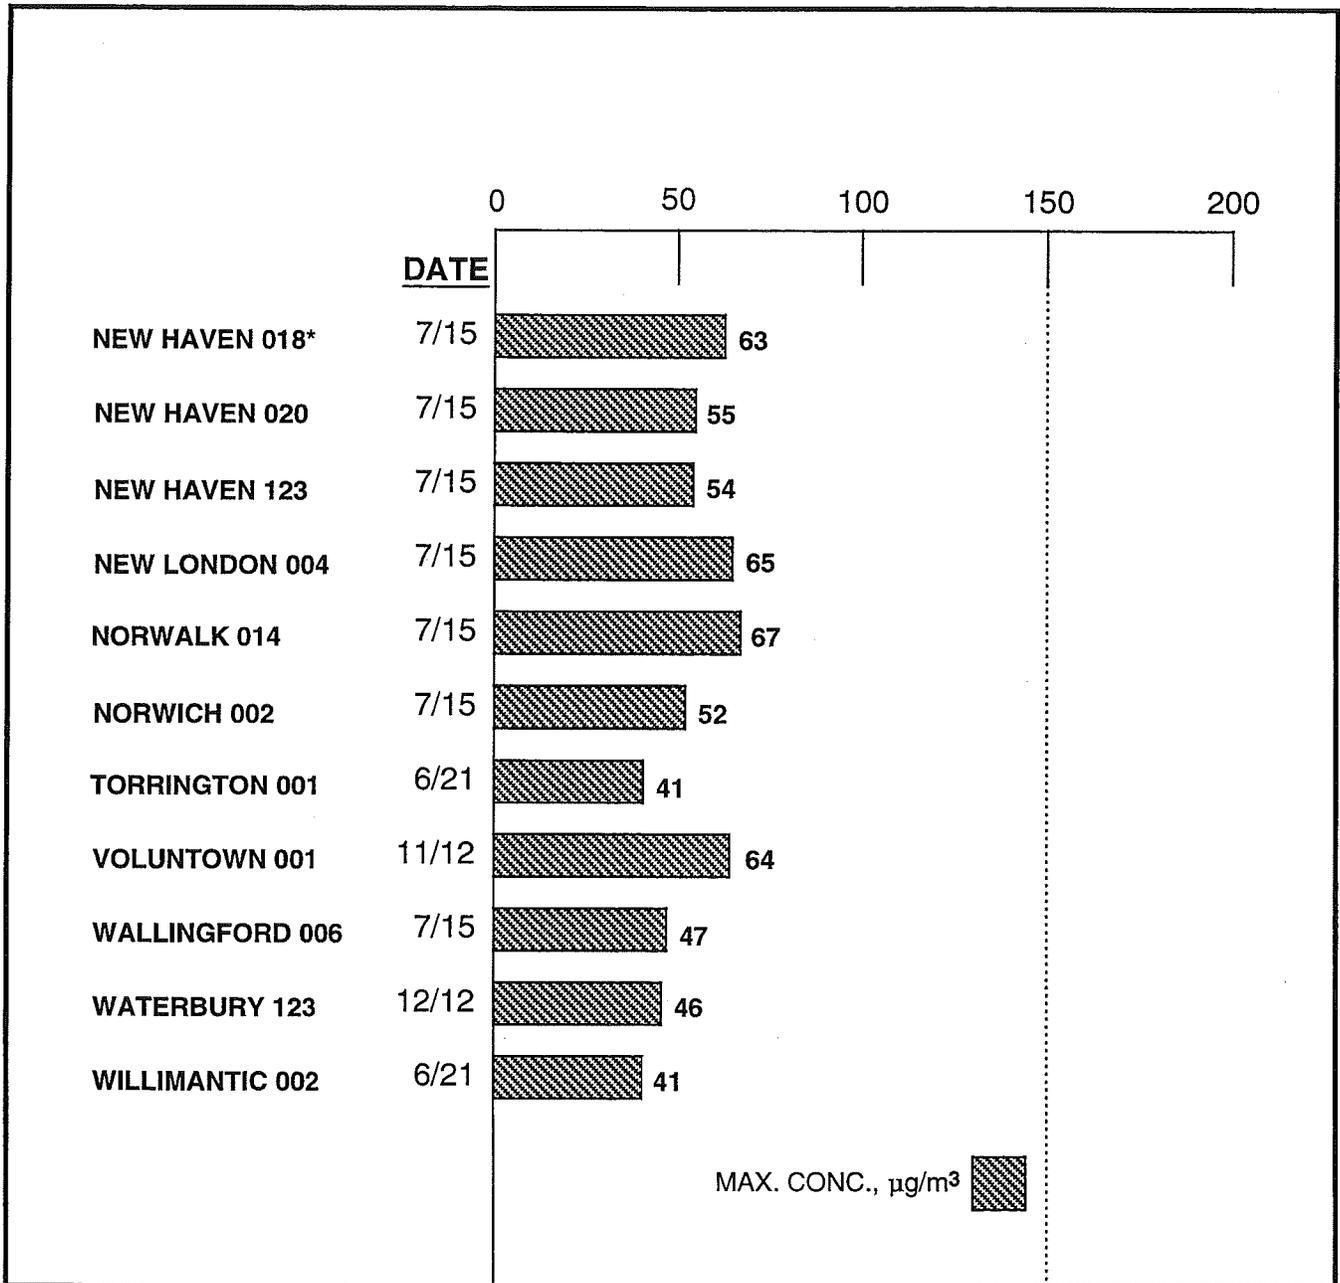

150 µg/m<sup>3</sup>  
24 - HOUR  
STANDARD

\* The site has insufficient data to satisfy the minimum sampling criteria for the year.


## TABLE 2-3

### SUMMARY OF THE STATISTICALLY PREDICTED NUMBER OF PM10 SITES EXCEEDING THE LEVEL OF THE 24-HOUR STANDARDS


<u>YEAR</u>	<u>NO. OF SITES<sup>1</sup></u>	<u>SITES WITH 1 DAY EXCEEDING 150 <math>\mu\text{g}/\text{m}^3</math></u>	
		<u>No. of Sites</u>	<u>Percentage of All Sites</u>
1985	2	0	0%
1986	5	2	40%
1987	5	1	20%
1988	3	1	33%
1989	40	1	3%
1990	39	0	0%
1991	30	0	0%
1992	28	0	0%
1993	23	0	0%
1994	25	1	4%
1995	26	0	0%
1996	19	0	0%
1997	19	0	0%

<sup>1</sup> Only those sites which had sufficient data to satisfy the minimum sampling criteria for the year.

**FIGURE 2-5**  
**AVERAGES OF THE ANNUAL PM<sub>10</sub> CONCENTRATIONS\***

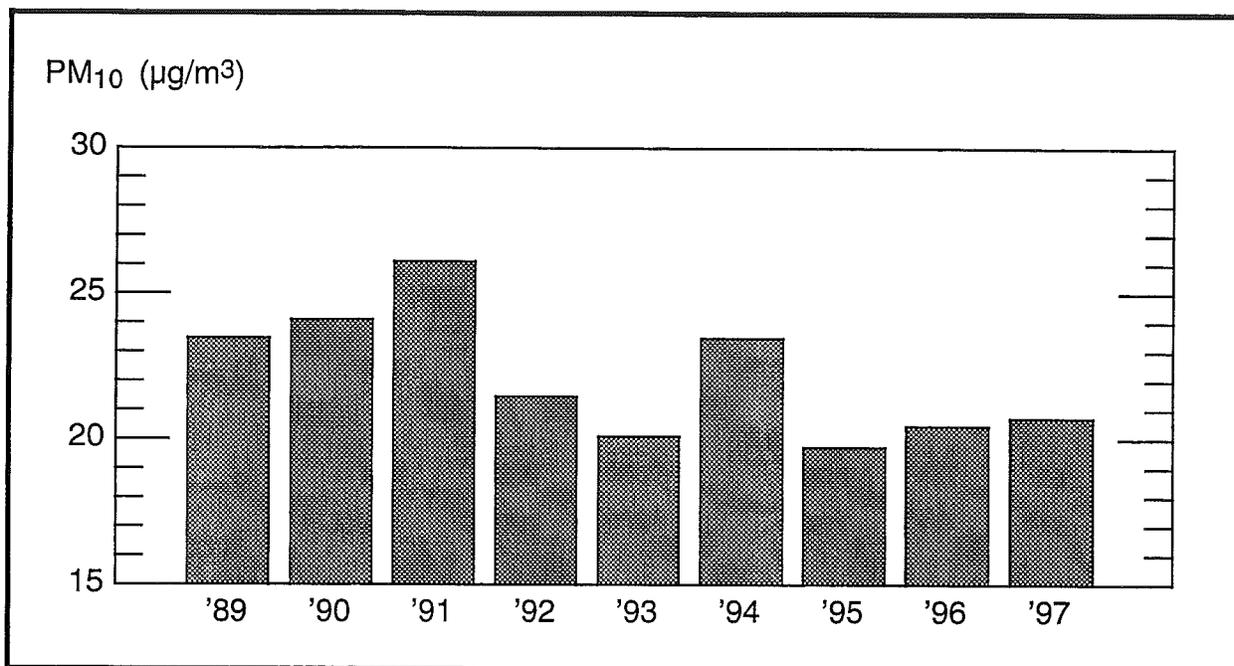

**FIGURE 2-6**  
**3-YEAR AVERAGES OF THE ANNUAL PM<sub>10</sub> CONCENTRATIONS\***

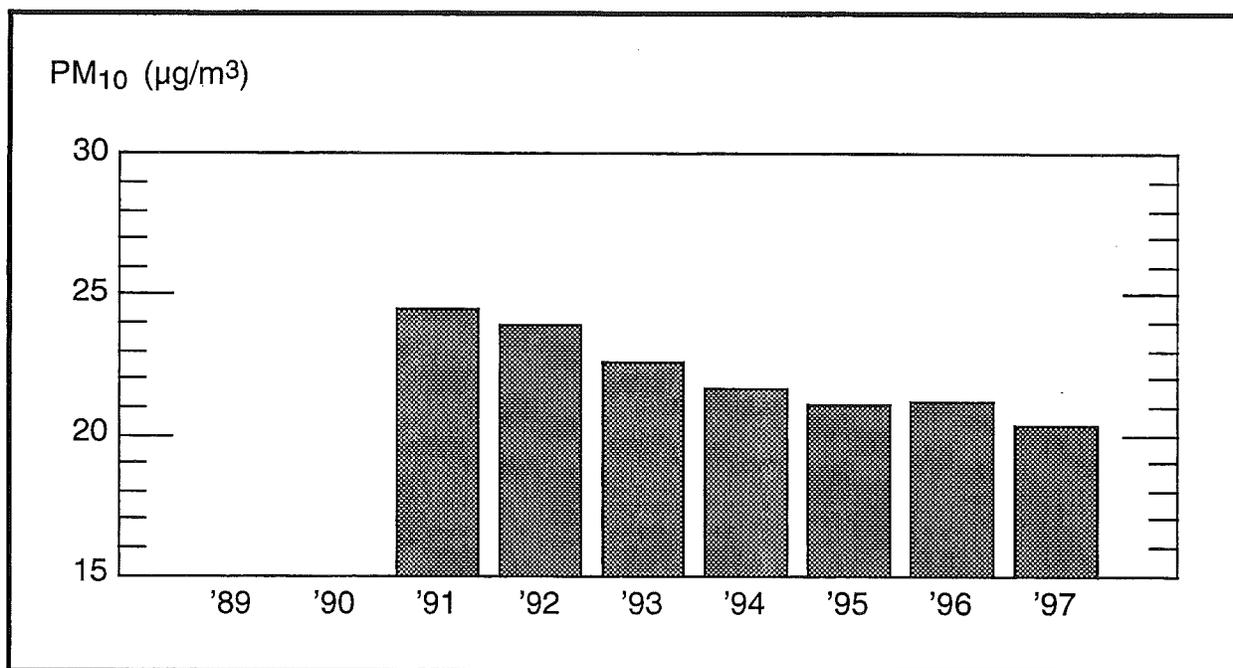

\* At the 9 sites that met the minimum sampling criteria in each year of the nine-year period.

### III. SULFUR DIOXIDE

#### HEALTH EFFECTS

Sulfur oxides are heavy, pungent, yellowish gases that come from the burning of sulfur-containing fuel, mainly coal and oil-derived fuels, and also from the smelting of metals and from certain industrial processes. They have a distinctive odor. Sulfur dioxide (SO<sub>2</sub>) comprises about 95 percent of these gases, so scientists use a test for SO<sub>2</sub> alone as a measure of all sulfur oxides.

Exposure to high levels of sulfur oxides can cause an obstruction of breathing that doctors call "pulmonary flow resistance." The amount of breathing obstruction has a direct relation to the amount of sulfur compounds in the air. Moreover, the effect of sulfur pollution is enhanced by the presence of other pollutants, especially particulates and oxidants. The action of two or more pollutants is synergistic: each pollutant augments the other and the combined effect is greater than the sum of the effects that each alone would have.

Many types of respiratory disease are associated with sulfur oxides: coughs and colds, asthma, bronchitis, and emphysema. Some researchers believe that the harm is due not only to the sulfur oxide gases but also to other sulfur compounds that accompany the oxides.

#### CONCLUSIONS

Sulfur dioxide concentrations in 1997 did not exceed any federal primary or secondary standards. Measured concentrations were substantially below the 365 µg/m<sup>3</sup> primary 24-hour standard and well below both the 80 µg/m<sup>3</sup> primary annual standard and the 1300 µg/m<sup>3</sup> secondary 3-hour standard.

#### METHOD OF MEASUREMENT

The DEP Air Monitoring Unit used the pulsed fluorescence method to continuously measure sulfur dioxide levels at all 12 sites in 1997.

#### DISCUSSION OF DATA

**Monitoring Network** - Twelve continuous SO<sub>2</sub> monitors were used to record data in 12 towns during 1997 (see Figure 3-1):

Bridgeport 012  
Danbury 123  
East Hartford 006  
East Haven 003  
Enfield 005  
Greenwich 017

Groton 007  
Hartford 018  
Mansfield 003  
New Haven 123  
Stamford 124  
Waterbury 123

All of these sites telemetered their data to the central computer in Hartford three times each day (i.e., at 0700, 1400, and 2400 hours local time).

**Precision and Accuracy** - 715 precision checks were made on SO<sub>2</sub> monitors in 1997, yielding 95% probability limits ranging from -4% to +5%. Accuracy is determined by introducing a known amount of SO<sub>2</sub> into each of the monitors. Three different concentration levels are tested: low, medium, and high. The 95% probability limits for accuracy based on 15 audits were: low, -5% to +4%; medium, -4% to +2%; and high, -3% to +2%.

**Annual Averages** - SO<sub>2</sub> levels were below the primary annual standard of 80 µg/m<sup>3</sup> at all sites in 1997 (see Table 3-1). The annual average SO<sub>2</sub> levels decreased at five of the twelve monitoring sites and increased at five sites. There was no change at Groton and Mansfield. The largest decrease was 4 µg/m<sup>3</sup> at Enfield and New Haven; the largest increase was 3 µg/m<sup>3</sup> at Bridgeport and Stamford.

**Statistical Projections** - A statistical analysis of the sulfur dioxide data is presented in Table 3-2. This analysis is produced by a DEP computer program and provides information to compensate for any loss of data caused by instrumentation problems. The format of Table 3-2 is the same as that used to present the statistical projections for particulate matter (see Table 2-1). Since the statistical projections are made for the 24-hour standard, the hourly SO<sub>2</sub> data are first converted to 24-hour block averages. These 24-hour "samples" form the basis for the annual arithmetic and geometric means and the arithmetic and geometric standard deviations employed by the DEP computer program to make the statistical projections and calculate the 95% confidence limits.

The monitored data indicate that there were no violations of the primary 24-hour SO<sub>2</sub> standard at any site in Connecticut in the last three years. The statistical projections confirm that no days exceeding the primary 24-hour standard of 365 µg/m<sup>3</sup> would have occurred during this period at any site, if sampling were complete.

The annual averages in Table 3-2 differ slightly from those in Table 3-1 due to the manner in which they were derived. The averages in Table 3-1 are based on the available hourly readings, while those in Table 3-2 are based on valid calendar day 24-hour averages. (At least 18 hourly readings are required to produce a valid 24-hour average.)

**24-Hour Averages** - Figure 3-2 presents the first and second high calendar day average concentrations recorded at each monitoring site in 1997. No site recorded SO<sub>2</sub> levels in excess of the 24-hour primary standard of 365 µg/m<sup>3</sup>. Second high calendar day SO<sub>2</sub> average concentrations increased at eleven monitoring sites and decreased at one monitoring site from 1996 to 1997. The largest increase was 21 µg/m<sup>3</sup> at Bridgeport, and the one decrease was 6 µg/m<sup>3</sup> at Waterbury.

Current EPA policy bases compliance with the primary 24-hour SO<sub>2</sub> standard on calendar day averages. Assessment of compliance is based on the second highest calendar day average in the year. Running averages are averages computed for the 24-hour periods ending at every hour. If running averages were used, assessment of compliance would be based on the value of the second highest of the two highest non-overlapping 24-hour periods in the year. There has been some contention over which average is the more appropriate one on which to base compliance. Table 3-3 contains the two highest 24-hour SO<sub>2</sub> readings at each site in terms of both the running averages and the calendar day averages. The first high 24-hour running averages are all equal to or greater than the first high calendar day averages. The second high 24-hour running averages are all larger than the second high calendar day averages.

**3-Hour Averages** - Figure 3-3 presents the first and second high 3-hour concentrations recorded at each monitoring site. Measured SO<sub>2</sub> concentrations were far below the federal secondary 3-hour standard of 1300 µg/m<sup>3</sup> at all DEP monitoring sites in 1997. Seven sites had higher second high concentrations and five sites had lower second high concentrations in 1997. The largest increase was 56 µg/m<sup>3</sup> at Bridgeport, and the largest decrease was 18 µg/m<sup>3</sup> at New Haven.

**Highest Daily Concentrations and Wind Data** - As is the case with particulate matter, the highest SO<sub>2</sub> concentrations occur on days when persistent winds out of the southwest quadrant predominate.

During the fifteen year period between 1981 and 1995, 46% of the annual ten highest daily concentrations of SO<sub>2</sub> at each monitoring site in the state occurred when such wind conditions prevailed. This relationship is caused, at least in part, by SO<sub>2</sub> transport, but any transport is limited by the chemical instability of SO<sub>2</sub>. In the atmosphere, SO<sub>2</sub> reacts with other gases to produce, among other things, sulfate particulates. Therefore, SO<sub>2</sub> is not likely to be transported very long distances. Previous studies conducted by the DEP have shown that, during periods of southwest winds, levels of SO<sub>2</sub> in Connecticut decrease with distance from the New York City metropolitan area. This relationship tends to support the transport hypothesis. On the other hand, these studies also revealed that certain meteorological parameters, most notably mixing height and wind speed, are more conducive to high SO<sub>2</sub> levels on days when there are southwest quadrant winds than on other days.

An examination of the available data for the period 1981-1995 also suggest another reason for maximum SO<sub>2</sub> days. Approximately 77% of such days occurred during the winter, and 21% occurred in late autumn. This phenomenon can be attributed to the fact that more fuel oil is burned during cold weather resulting in greater SO<sub>2</sub> emissions. In addition, temperature inversions, in which mixing heights are reduced, are more prevalent in autumn and winter.

In summary, high levels of SO<sub>2</sub> in Connecticut seem to be caused by a number of related factors. First, Connecticut experiences its highest SO<sub>2</sub> levels during the late fall and winter months, when there is an increased amount of fuel combustion. Second, the New York City metropolitan area, a large emission source, is located to the southwest of Connecticut, and southwest quadrant winds occur relatively often in this region in comparison to other wind directions. Also, adverse meteorological conditions are often associated with such winds. The net effect is that during the colder months when a persistent southwest quadrant wind occurs, an air mass picks up increased amounts of SO<sub>2</sub> over the New York City metropolitan area and transports this SO<sub>2</sub> into Connecticut, adding to Connecticut's own contribution to ambient levels. In addition, relatively low mixing heights are associated with warm air advection ( i.e., southwest quadrant wind flow), which inhibits vertical mixing and contributes to the enhanced SO<sub>2</sub> concentrations. The levels of transported SO<sub>2</sub> eventually decline with increasing distance from New York City, as the SO<sub>2</sub> is dispersed and as it slowly reacts to produce sulfate particulates. These sulfate particulates may fall to the ground in either a dry state (dry deposition) or in a wet state after combination with water droplets (wet deposition or "acid rain").

**Trends** - The SO<sub>2</sub> trend over the ten year period from 1988 to 1997 is presented in Figure 3-4. The trend is clearly down over the ten year period.

As was the case with the particulate matter trend, we wanted to portray an SO<sub>2</sub> trend that is both statewide in nature and relevant to one of the ambient air quality standards for SO<sub>2</sub>. We chose to average the annual SO<sub>2</sub> concentrations at a number of sites: Bridgeport, East Haven, Enfield, Groton, New Haven and Waterbury. These sites were the only sites that had sufficient data and valid annual averages over a twelve year period.

Annual SO<sub>2</sub> levels can be dramatically affected by a number of factors, some of which are annual fuel use, frequency of precipitation events, and changes in wind speed and direction. The importance of these relatively short term factors can be diminished in the portrayal of a pollution trend by means of multiple year averaging. Figure 3-5 employs a three year average of the data in Figure 3-4 and shows a smoother year-to-year transition as a result. The SO<sub>2</sub> trend is clearly down over the last nine years.

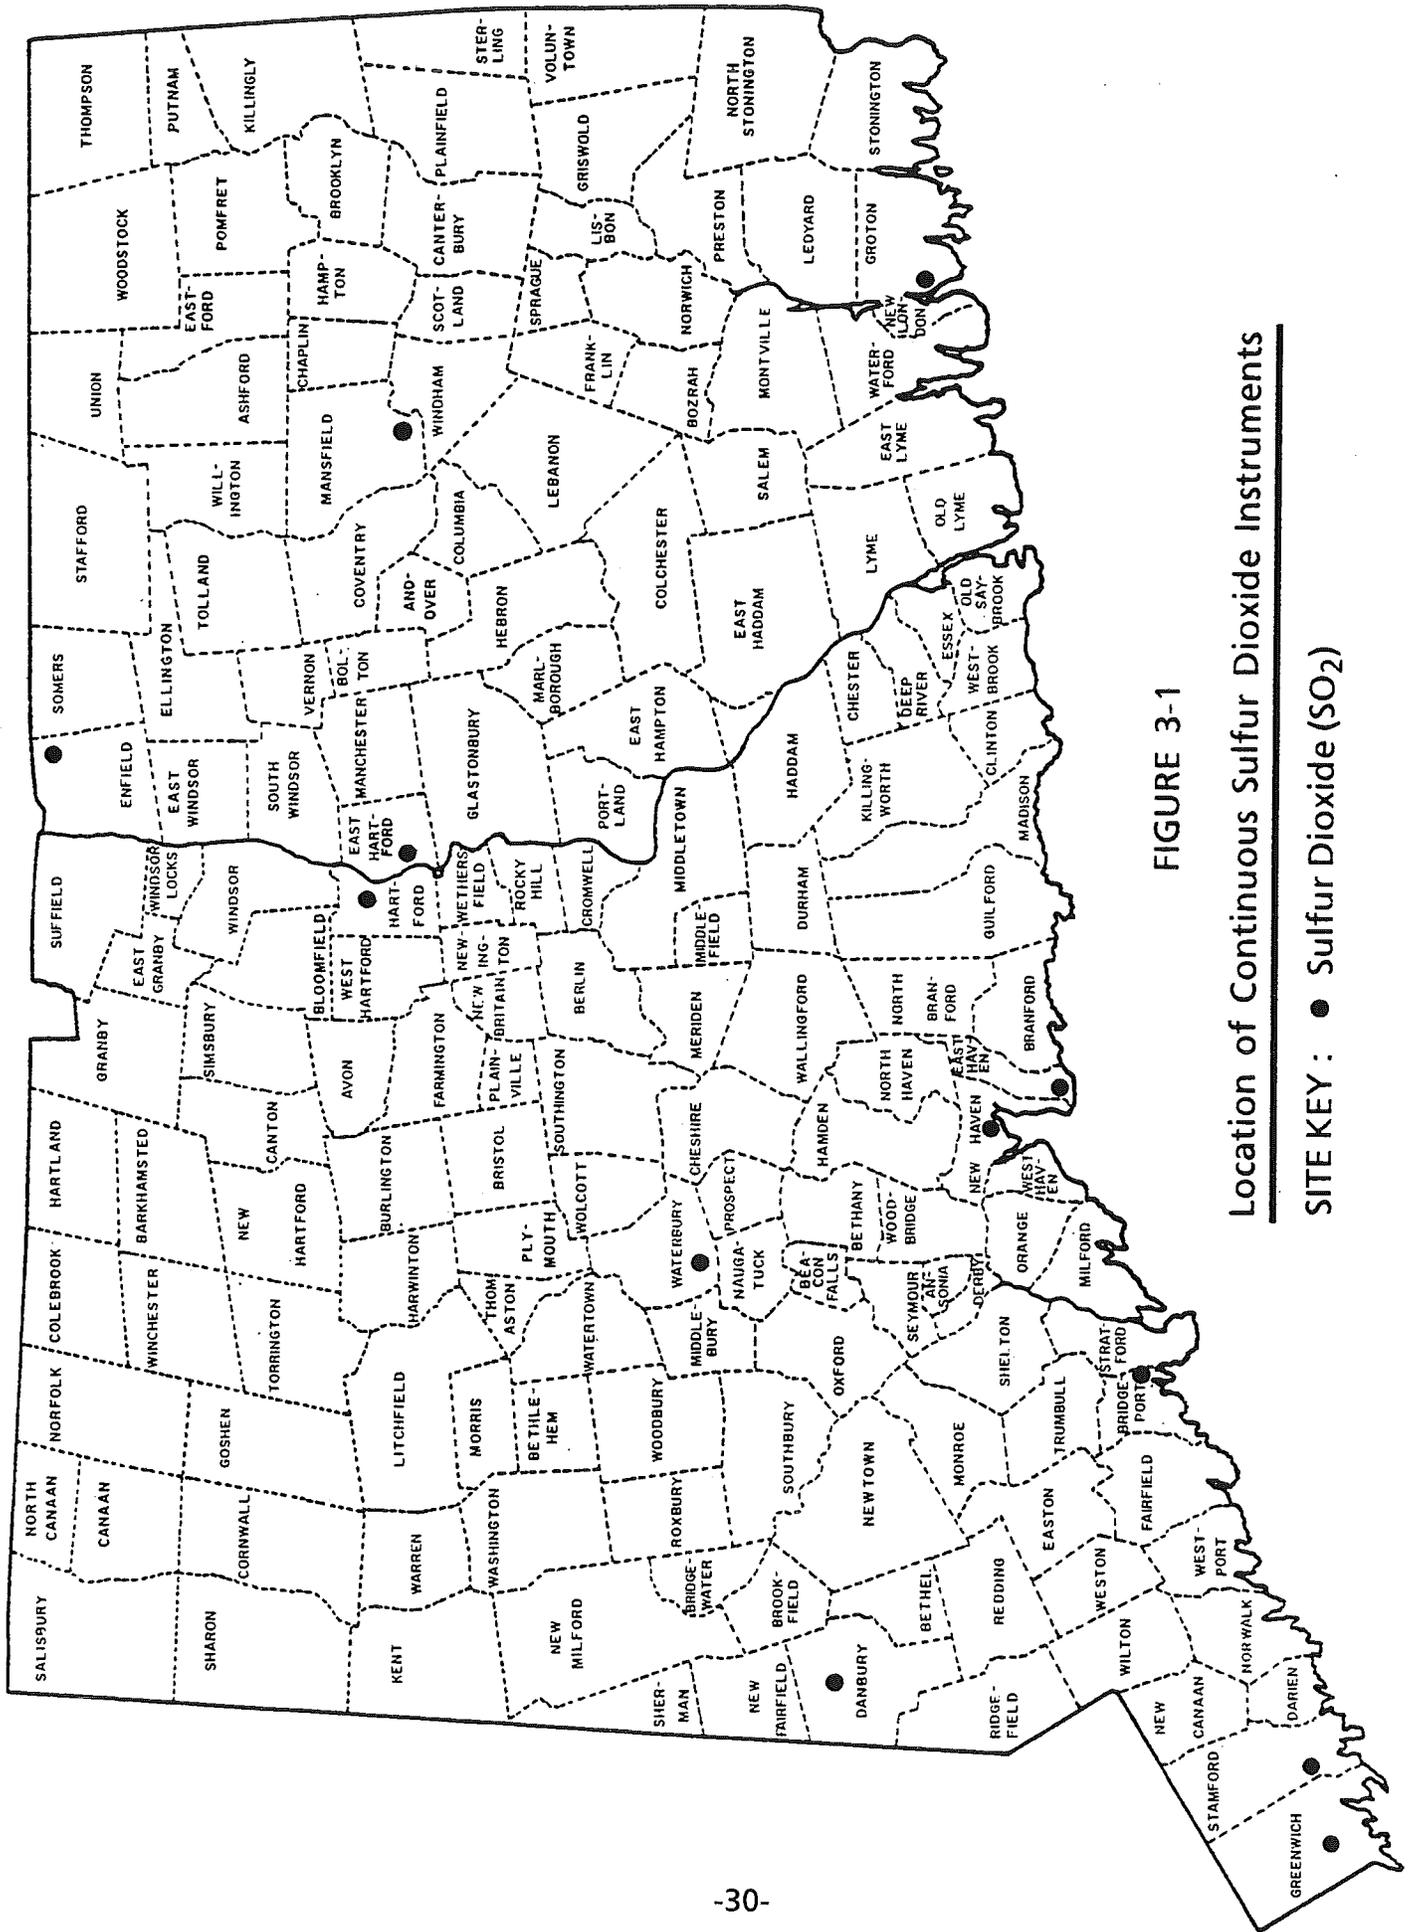


FIGURE 3-1

Location of Continuous Sulfur Dioxide Instruments

SITE KEY : ● Sulfur Dioxide (SO<sub>2</sub>)

## TABLE 3-1

### 1997 ANNUAL ARITHMETIC AVERAGES OF SULFUR DIOXIDE

(PRIMARY STANDARD: 80  $\mu\text{g}/\text{m}^3$ )

<u>TOWN-SITE</u>	<u>SITE NAME</u>	<u>ANNUAL AVG</u> ( $\mu\text{g}/\text{m}^3$ )
Bridgeport 012	Edison School	18
Danbury 123	Western CT State University	13
East Hartford 006	High Street	14
East Haven 003	Animal Shelter	13
Enfield 005	Department of Corrections	9
Greenwich 017	Greenwich Point Park	11
Groton 007	Fire Headquarters	12
Hartford 018	Sheldon Street	11
Mansfield 003	Dept. of Transportation	7
New Haven 123	State Street	15
Stamford 124	Stamford High School	17
Waterbury 123	Bank Street	14

TABLE 3-2

1995-1997 SO<sub>2</sub> ANNUAL AVERAGES AND STATISTICAL PROJECTIONS

TOWN NAME	SITE	YEAR	SAMPLES	ARITHMETIC 95-PCT-LIMITS			STANDARD DEVIATION	PREDICTED DAYS OVER 365 UG/M <sup>3</sup>
				MEAN	LOWER	UPPER		
BRIDGEPORT	012	1995	357	17.4	17.2	17.6	14.293	
	012	1996	353	14.8	14.5	15.1	13.675	
	012	1997	359	17.7	17.5	17.9	14.515	
BRIDGEPORT	013	1995	356	16.2	16.0	16.4	13.361	
DANBURY	123	1995	344	11.4	11.1	11.6	9.792	
	123	1996	334	11.2	10.9	11.5	10.405	
	123	1997	363	12.8	12.7	12.9	10.019	
EAST HARTFORD	006	1995	353	13.4	13.2	13.6	10.959	
	006	1996	354	15.1	14.9	15.3	11.018	
	006	1997	363	14.1	14.0	14.2	9.318	
EAST HAVEN	003	1995	365	10.3	10.3	10.3	10.368	
	003	1996	350	10.7	10.5	10.9	10.777	
	003	1997	358	12.7	12.5	12.8	10.026	
ENFIELD	005	1995	359	10.3	10.2	10.4	7.265	
	005	1996	354	12.6	12.4	12.7	8.787	
	005	1997	354	9.0	8.8	9.1	8.090	
GREENWICH	017	1995	357	11.0	10.9	11.1	8.931	
	017	1996	355	12.3	12.1	12.4	8.684	
	017	1997	365	11.0	11.0	11.0	9.229	
GROTON	007	1995	362	12.4	12.3	12.5	8.583	
	007	1996	363	11.8	11.7	11.9	7.583	
	007	1997	365	11.6	11.6	11.6	7.538	
HARTFORD	018	1995	358	13.5	13.4	13.7	9.909	
	018	1996	363	11.7	11.6	11.8	10.004	
	018	1997	364	10.8	10.7	10.8	9.338	

N.B. THE ARITHMETIC MEAN AND STANDARD DEVIATION HAVE UNITS OF MICROGRAMS PER CUBIC METER.


TABLE 3-2, CONTINUED  
 1995-1997 SO2 ANNUAL AVERAGES AND STATISTICAL PROJECTIONS

TOWN NAME	SITE	YEAR	SAMPLES	ARITHMETIC 95-PCT-LIMITS		STANDARD DEVIATION	PREDICTED DAYS OVER 365 UG/M3
				MEAN	LOWER UPPER		
MANSFIELD	003	1995	356	7.7	7.7 7.8	5.484	
MANSFIELD	003	1996	361	7.0	6.9 7.0	5.608	
MANSFIELD	003	1997	362	6.9	6.9 7.0	5.905	
NEW HAVEN	123	1995	354	21.2	20.9 21.5	16.612	
NEW HAVEN	123	1996	357	19.5	19.3 19.8	14.763	
NEW HAVEN	123	1997	359	15.1	14.9 15.2	14.037	
STAMFORD	124	1995	345	28.7	28.2 29.2	19.182	
STAMFORD	124	1996	362	14.0	13.8 14.1	12.898	
STAMFORD	124	1997	365	16.6	16.6 16.6	12.480	
WATERBURY	123	1995	358	12.3	12.1 12.4	9.324	
WATERBURY	123	1996	364	13.2	13.2 13.3	10.516	
WATERBURY	123	1997	359	13.7	13.6 13.8	9.244	

N.B. THE ARITHMETIC MEAN AND STANDARD DEVIATION HAVE UNITS OF MICROGRAMS PER CUBIC METER.

# FIGURE 3-2


## 1997 MAXIMUM CALENDAR DAY AVERAGE SO<sub>2</sub> CONCENTRATIONS

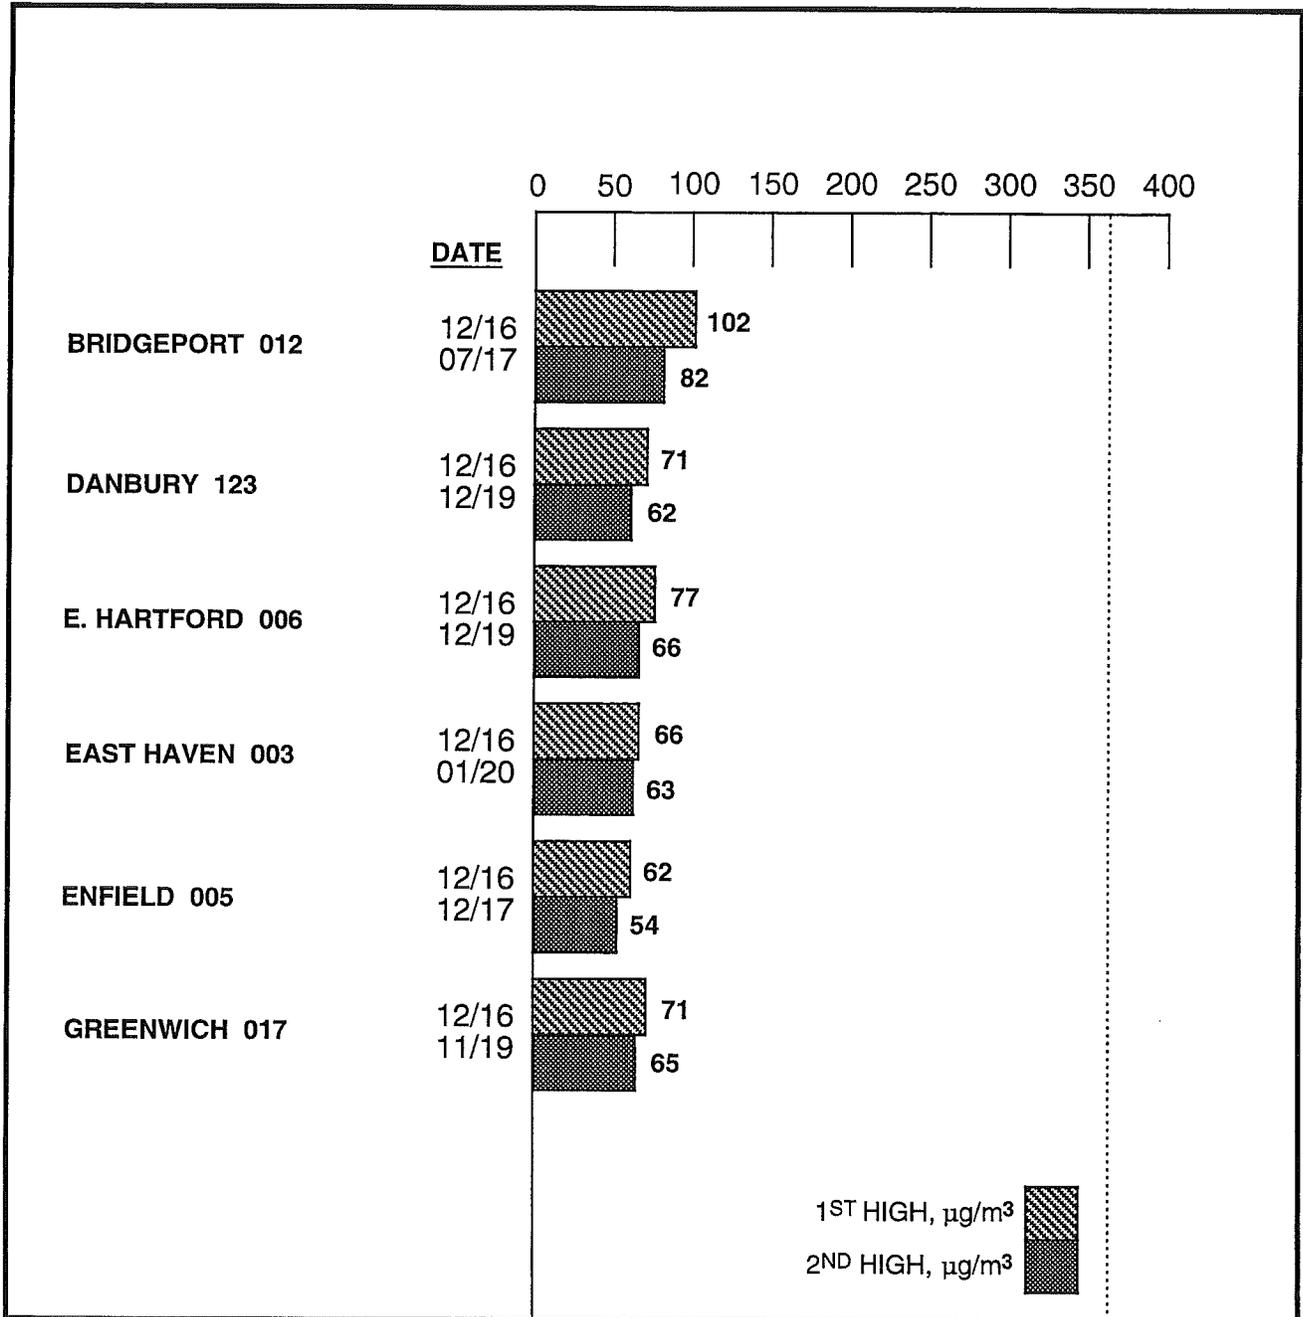

365  
PRIMARY STANDARD

# FIGURE 3-2, CONTINUED

## 1997 MAXIMUM CALENDAR DAY AVERAGE SO<sub>2</sub> CONCENTRATIONS

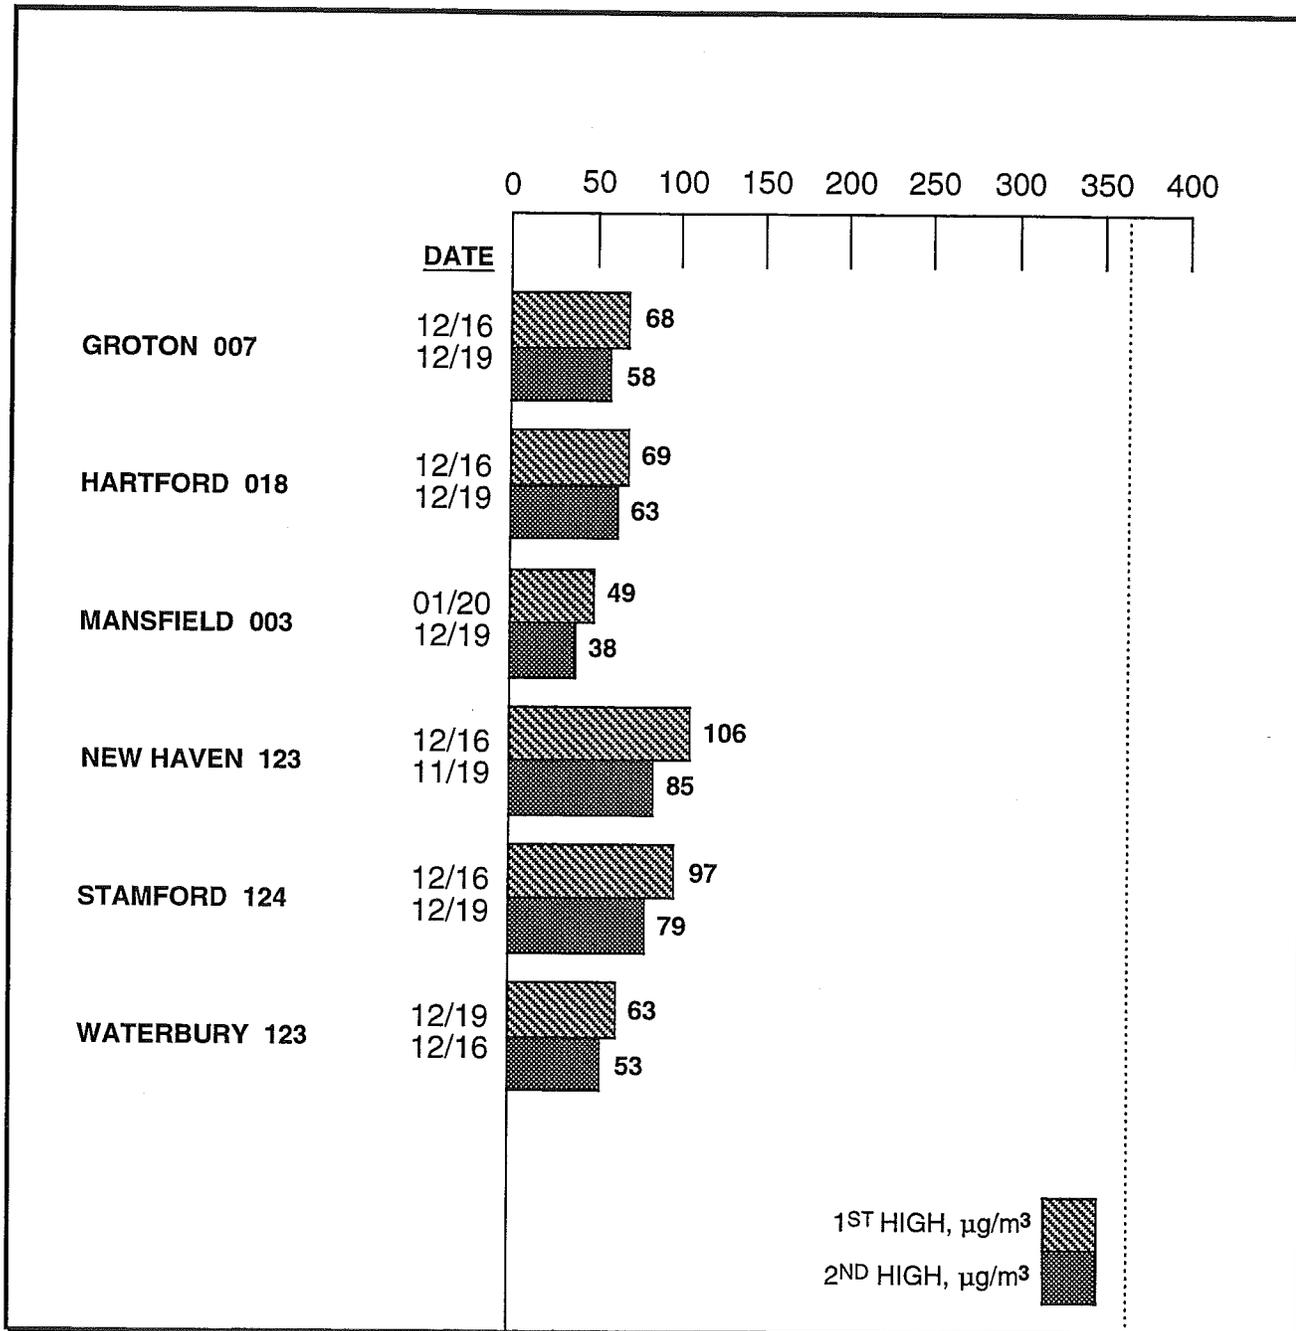

365  
PRIMARY STANDARD


**TABLE 3-3****COMPARISONS OF FIRST AND SECOND HIGH CALENDAR DAY  
AND RUNNING 24-HOUR SO<sub>2</sub> AVERAGES IN 1997**

<u>SITE</u>	<u>FIRST HIGH AVERAGE</u>		<u>SECOND HIGH AVERAGE</u>	
	<u>RUNNING 24-HOUR</u>	<u>CALENDAR DAY</u>	<u>RUNNING 24-HOUR</u>	<u>CALENDAR DAY</u>
Bridgeport-012	105	102	87	82
Danbury-123	71	71	66	62
E. Hartford-006	80	77	69	66
East Haven-003	68	66	65	63
Enfield-005	72	62	58	54
Greenwich-017	72	71	69	65
Groton-007	74	68	61	58
Hartford-018	75	69	68	63
Mansfield-003	50	49	40	38
New Haven-123	117	106	102	85
Stamford-124	99	97	90	79
Waterbury-123	63	63	56	53

N.B. The averages have units of  $\mu\text{g}/\text{m}^3$ .

# FIGURE 3-3


## 1997 MAXIMUM 3-HOUR RUNNING AVERAGE SO<sub>2</sub> CONCENTRATIONS

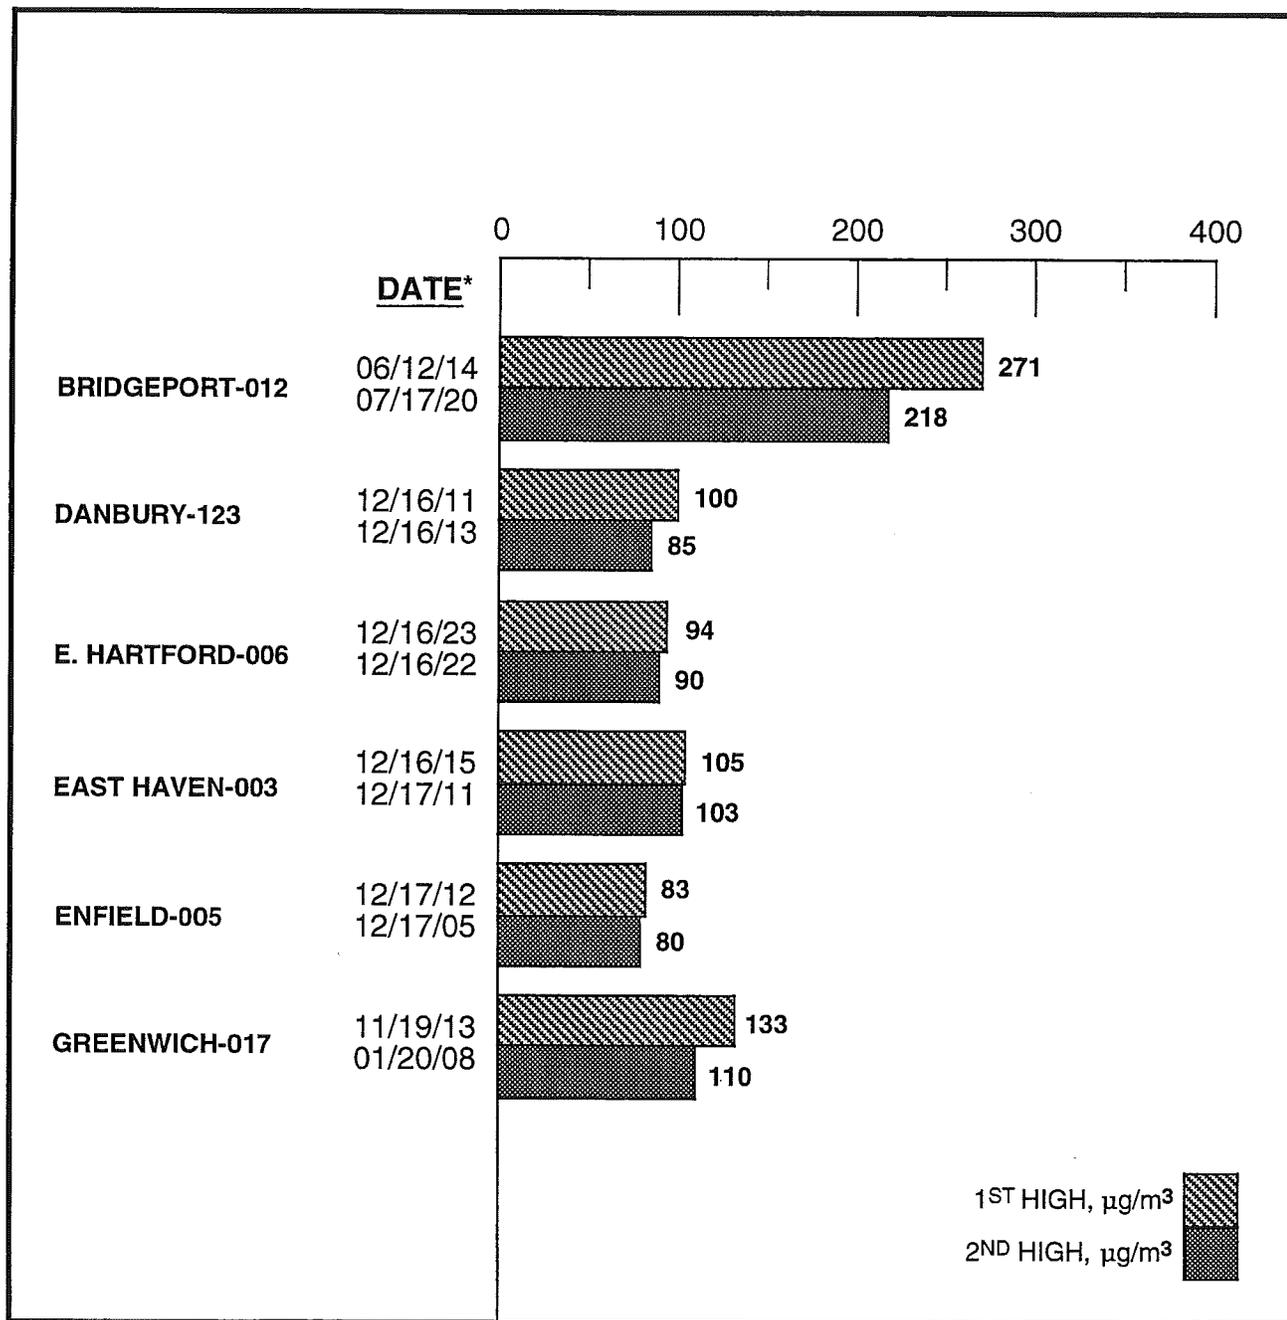

\* The date is the month/day/ending hour of occurrence.  
 Secondary standard = 1300 µg/m<sup>3</sup>.


### FIGURE 3-3, CONTINUED

### 1997 MAXIMUM 3-HOUR RUNNING AVERAGE SO<sub>2</sub> CONCENTRATIONS

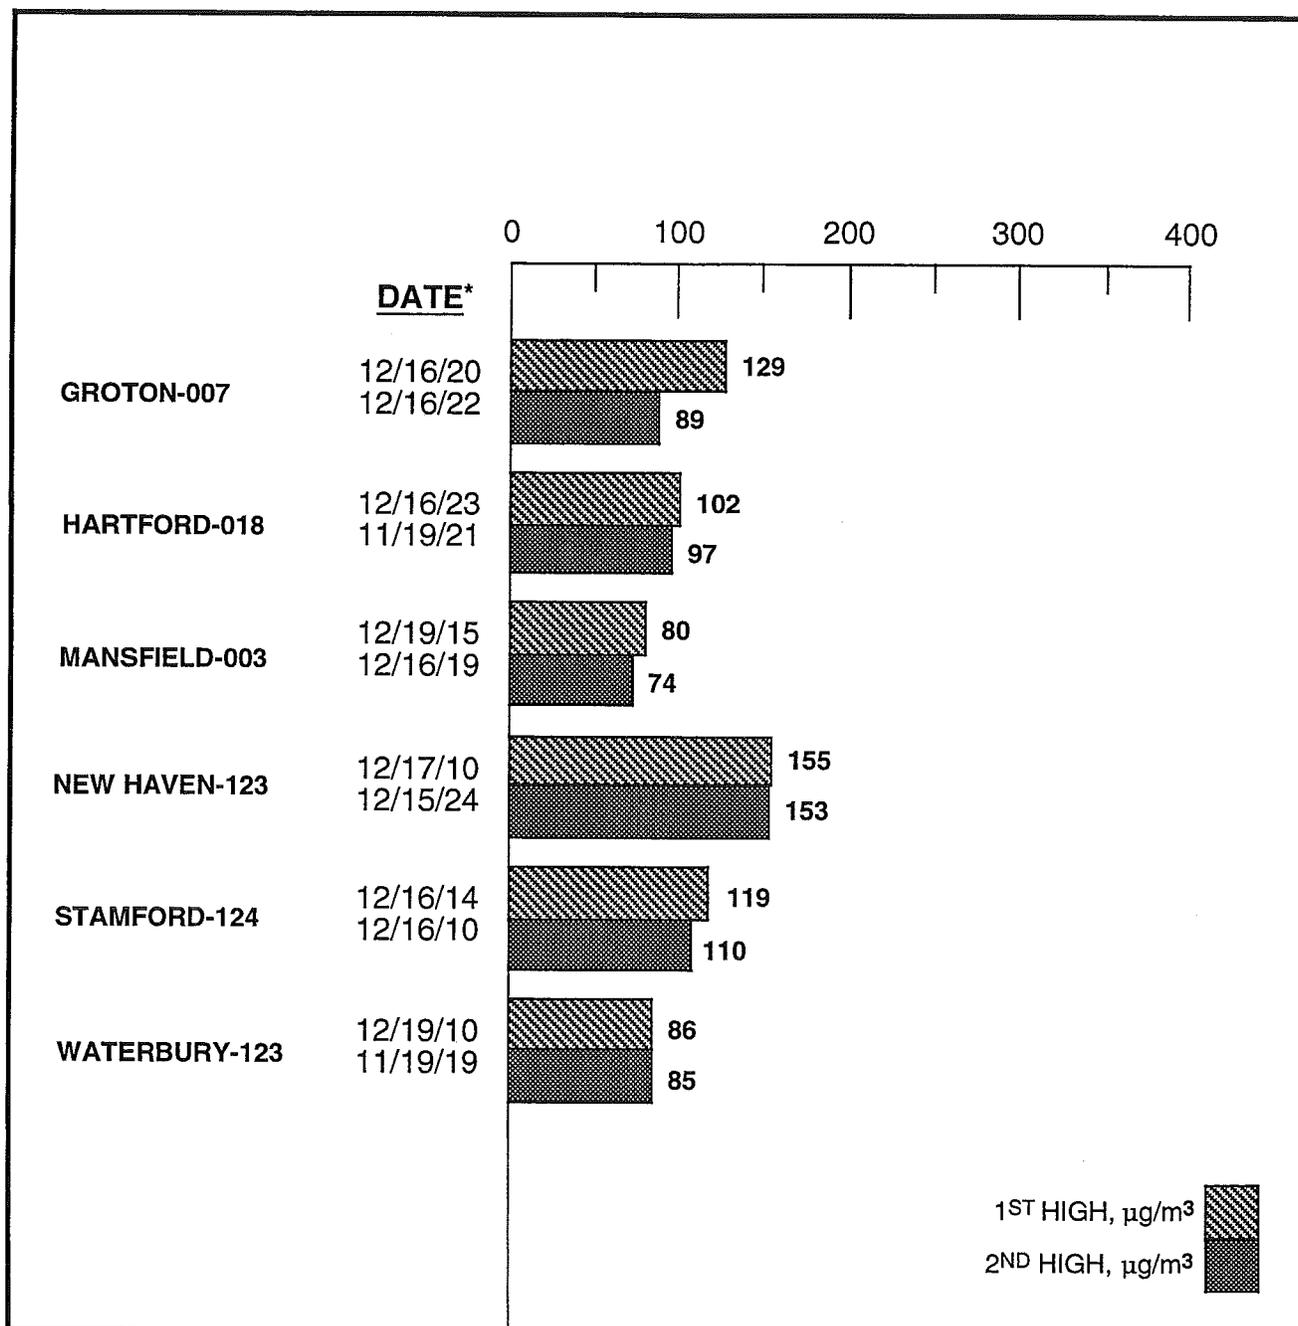


\* The date is the month/day/ending hour of occurrence.  
 Secondary standard = 1300 µg/m<sup>3</sup>.

**FIGURE 3-4**  
**AVERAGES OF THE ANNUAL SO<sub>2</sub> CONCENTRATIONS AT SIX SITES**

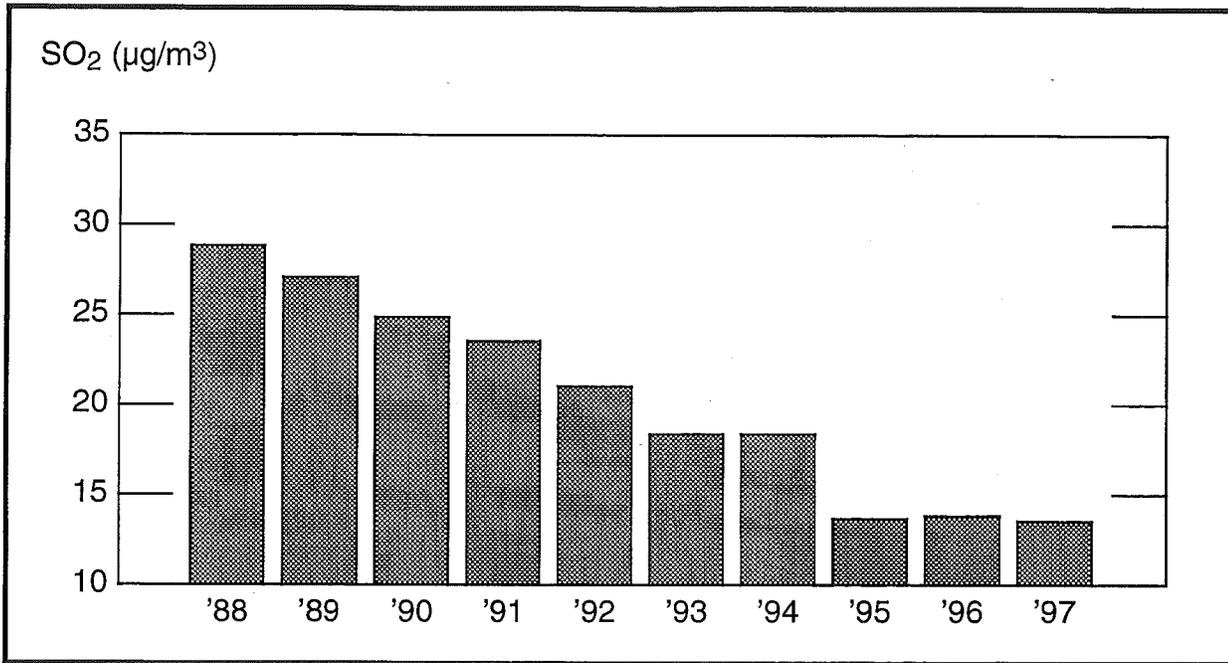

**FIGURE 3-5**  
**3-YEAR AVERAGES OF THE ANNUAL SO<sub>2</sub> CONCENTRATIONS AT SIX SITES**

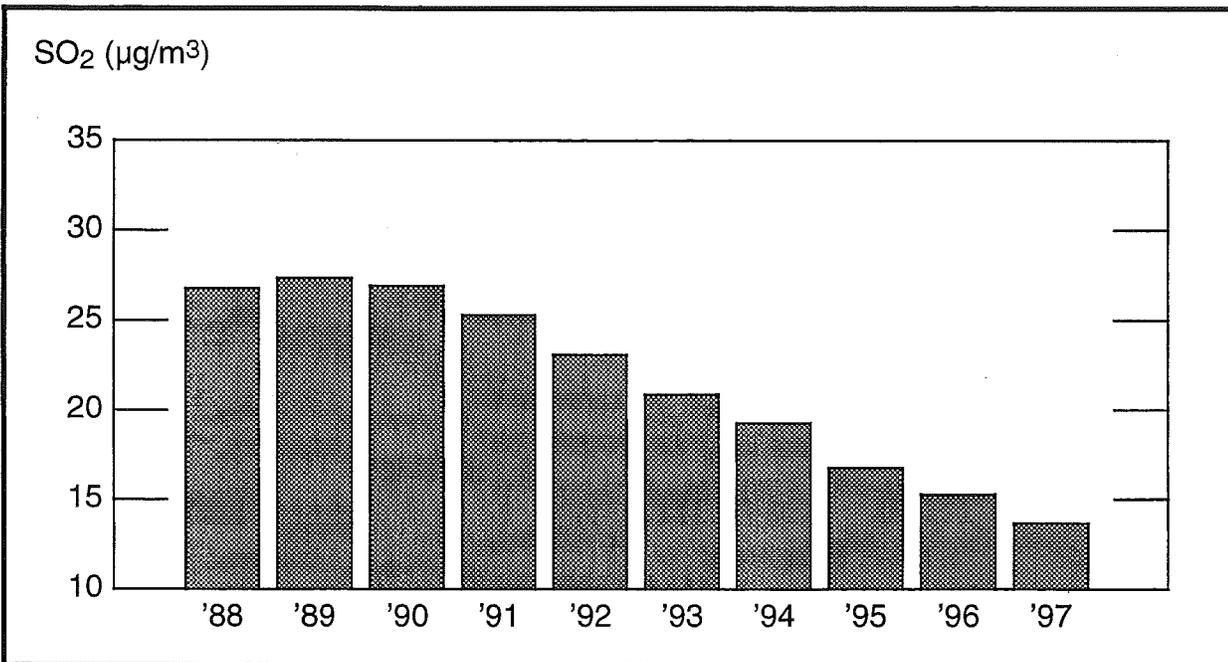

## IV. OZONE

### HEALTH EFFECTS

Ozone is a highly reactive form of oxygen and the principal component of modern smog. Until recently, EPA called this type of pollution "photochemical oxidants." But this was changed to ozone because ozone is the most plentiful component of smog and is easily measured.

Ozone and other oxidants -- including peroxyacetal nitrates (PAN), formaldehyde and peroxides -- are not usually emitted into the air directly. They are formed by chemical reactions in the air from two other pollutants: hydrocarbons and nitrogen oxides. Energy from sunlight is needed for these chemical reactions. This accounts for the term photochemical smog, as well as for the daily variation in ozone levels, which increase during the day and decrease at night.

Ozone is a pungent gas with a faintly bluish color. It irritates the mucous membranes of the respiratory system, causing coughing, choking and impaired lung function. It aggravates chronic respiratory diseases like asthma and bronchitis and is believed capable of hastening the death, by pneumonia, of persons in already weakened health. PAN and the other oxidants that accompany ozone are powerful eye irritants.

### NATIONAL AMBIENT AIR QUALITY STANDARD

On February 8, 1979 the EPA established a national ambient air quality standard (NAAQS) for ozone of 0.12 ppm for a one-hour average. Compliance with this standard is determined by summing the number of days at each monitoring site over a consecutive three-year period when the 1-hour standard is exceeded and then computing the average number of exceedances over this interval. If the resulting average value is less than or equal to 1.0 (that is, if the fourth highest daily value in a consecutive three-year period is less than or equal to 0.12 ppm) the ozone standard is considered attained at the site. This standard replaces the old photochemical oxidant standard of 0.08 ppm. The definition of the pollutant was changed along with the numerical value of the standard, partly because the instruments used to measure photochemical oxidants in the air really measure only ozone. Ozone is one of a group of chemicals which are formed photochemically in the air and are called photochemical oxidants. In the past, the two terms have often been used interchangeably. This Air Quality Summary uses the term "ozone" in conjunction with the NAAQS to reflect the change in both the numerical value of the NAAQS and the definition of the pollutant.

The EPA defines the ozone standard to two decimal places. Therefore, the standard is considered exceeded when a level of 0.13 ppm is reached. However, since the DEP still measures ozone levels to three decimal places, any one-hour average ozone reading which equals or is greater than 0.125 ppm is considered an exceedance of the 0.12 ppm standard in Connecticut. This interpretation of the ozone standard differs from the one used by the DEP before 1982, when a one-hour ozone concentration of 0.121 ppm was considered an exceedance of the standard.

### CONCLUSIONS

As in past years, Connecticut experienced high concentrations of ozone in the summer months of 1997. Levels in excess of the one-hour NAAQS of 0.12 ppm were recorded at eleven of the twelve ozone monitoring sites. Moreover, the 1-hour ozone standard was violated at the same eleven sites because the "expected number of exceedances" for the most recent 3 years at each site exceeded one. There was no

violation of the 1-hour standard at the Torrington 006 site. The highest hourly concentration was 0.187 ppm, which was measured at the Stratford 007 site.

The incidence of hourly ozone concentrations in excess of the 1-hour 0.12 ppm standard was significantly higher in 1997 than in 1996 (see Table 4-1). There was a total of 10 hourly exceedances in 1996 and 120 hourly exceedances in 1997 at the twelve monitoring sites. This represents an increase in the frequency of such exceedances from 0.15 per 1000 sampling hours in 1996 to 2.35 per 1000 sampling hours in 1997: a 1467% increase. The actual number of hours when the ozone standard was exceeded in the state increased from 8 in 1996 to 49 in 1997.

The number of site-days on which the ozone monitors experienced ozone levels in excess of the 1-hour standard increased from 6 in 1996 to 39 in 1997 at the twelve monitoring sites (see Table 4-2). This represents an increase in the frequency of such occurrences from 0.31 per 100 sampling days in 1996 to 1.84 per 100 sampling days in 1997: a 493% increase. The actual number of days on which the ozone standard was exceeded in the state increased from 4 in 1996 to 12 in 1997.

The yearly changes in ozone concentrations can be attributed primarily to year-to-year variations in regional weather conditions, especially wind direction, temperature and the amount of sunlight. A large portion of the peak ozone concentrations in Connecticut is caused by the transport of ozone and/or precursors (i.e., hydrocarbons and nitrogen oxides) from the New York City area and from other points west to south of Connecticut. Therefore, an increase in the frequency of winds out of the southwest quadrant would help to explain the increase in the number of ozone exceedances from 1996 to 1997. However, the percentage of such winds during the "ozone season" decreased from 46% in 1996 to 39% in 1997, as is shown by the wind roses from the Stafford 001 site (Figures 4-1 and 4-2). The magnitude of high ozone levels can be partly associated with yearly variations in temperature, since ozone production is greatest at high temperatures and in strong sunlight. The summer season's daily high temperatures were higher in 1997 than in 1996. This is demonstrated by the number of days exceeding 90° F which increased from one in 1996 to five in 1997 at Sikorsky Airport in Bridgeport, and from five in 1996 to sixteen in 1997 at Bradley International Airport. The incidence of high ozone levels is also dependent on the amount of sunlight, since sunlight is essential to the creation of ozone. According to measurements recorded at Stafford 001 site, the amount of solar radiation increased 8.2% from 1996 to 1997, as determined by the daily mean for the months June through August. Of the meteorological parameters discussed above, both temperature and solar radiation can be seen as contributing to the increase in ozone levels from 1996 to 1997.

The meteorological influences notwithstanding, additional and important factors contributing to the decrease in ozone concentrations over time are the continuing efforts of the EPA and the state Department of Environmental Protection to control the emissions of nitrogen oxides and hydrocarbons. Newer automobiles continue to be less polluting, and the use of reformulated gasoline, which was initiated in January of 1995, reduces vehicle hydrocarbon emissions by 15-17% and lowers the vapor pressure of gasoline in the summer months, reducing evaporative emissions. In addition, the state's inspection and maintenance program for motor vehicles, as well as the Stage I and Stage II vapor recovery requirements, also lessen the emissions of hydrocarbons into the air.

#### **METHOD OF MEASUREMENT**

The DEP Air Monitoring Unit uses UV photometry to measure and record instantaneous concentrations of ozone continuously by means of a UV absorption technique. Properly calibrated, instruments of this type are shown to be remarkably reliable and stable.

## DISCUSSION OF DATA

**Monitoring Network** - In order to gather information which will further the understanding of ozone production and transport, DEP operated a state-wide ozone monitoring network consisting of four types of sites in 1997 (see Figure 4-3):

Urban	- East Hartford, Middletown
Advection from Southwest	- Greenwich, Groton, Madison, Stratford, Westport
Urban and advection from Southwest	- Bridgeport, Danbury, New Haven
Rural	- Stafford, Torrington

**Precision and Accuracy** - The ozone monitors had a total of 351 precision checks during 1997. The resulting 95% probability limits were -5% to +6%. Accuracy is determined by introducing a known amount of ozone into each of the monitors. Three different concentration levels are tested: low, medium, and high. The 95% probability limits, based on 11 audits conducted on the monitoring system, were: low, -5% to +8%; medium, -4% to +5%; and high, -5% to +4%.

**1-Hour Average** - The 1-hour ozone standard was exceeded at eleven of the twelve DEP monitoring sites in 1997, where an exceedance is defined as an hourly concentration of 0.125 ppm or greater. Between 1996 and 1997, the maximum 1-hour concentration increased at all twelve monitoring sites. The largest increase was 0.061 ppm at Stratford; the smallest increase was 0.007 ppm at Torrington. The second high 1-hour concentration also increased at all twelve sites between 1996 and 1997. The largest increase was 0.057 ppm at East Hartford; the smallest increase was 0.012 ppm at both Stratford and Torrington.

The number of hours when the ozone standard was exceeded at each site during the summertime "ozone season" is presented in Table 4-1. The number of days on which the 1-hour standard was exceeded at each site is presented in Table 4-2. Figure 4-4 shows the year's high and second high concentrations at each site.

**Highest Hourly Ozone Concentrations and Wind Data** - As with particulate matter and sulfur dioxide, the highest ozone levels occur on days with persistent winds out of the southwest quadrant. During the fifteen year period between 1981 and 1995, 74% of the annual ten highest daily 1-hour average concentrations of ozone at each monitoring site in the state occurred when such wind conditions prevailed. This is due to the special features of a southwest quadrant wind blowing over Connecticut. One feature is that, during the summer, these winds are usually accompanied by high temperatures and bright sunshine, which are important to the production of ozone. Another feature of such winds is that they will transport precursor emissions from New York City and from other urban areas west to south of Connecticut. It is the combination of these factors that often produces unhealthy ozone levels in Connecticut.

There are also instances of high ozone levels on non-southwest wind days. This suggests that pollution control programs currently being implemented in this state are needed to protect the public health of Connecticut's citizenry on days when Connecticut is responsible for its own pollution.

**Trends** - Ozone trends can be illustrated in a number of ways by using various statistics: daily mean concentration, daily maximum concentration, number of hourly exceedances, number of daily exceedances, etc. Each has its merits. The daily maximum ozone concentration is used here as the basis for a trend analysis because (1) it represents a more robust data set than hourly or daily exceedances, and (2) a maximum concentration is more relevant to the NAAQS for ozone.

Figure 4-5 shows the unweighted average of the annual means of the maximum daily concentrations at ten ozone sites from 1988 to 1997. There is a lot of variation in the statistic from one year to the next. The importance of meteorology in the formation of ozone explains much of this

variation. However, unless the effect of meteorology can be factored out, one cannot judge the effect of emission control measures on ozone production. A regression line through the data in Figure 4-5 would trend down, but the reason for this would not be evident.

The effect of meteorology on an ozone trend can be diminished by multiple year averaging. Periods of multiple years exhibit much less meteorological variability than do single years, and a trend analysis based on multiple years should more clearly reveal the effect of emission controls on ambient ozone concentrations. Figure 4-6 illustrates five year running averages of the data that is presented in Figure 4-5. With the variability of the weather minimized, it is evident that ozone has been trending downward.

## **PHOTOCHEMICAL ASSESSMENT MONITORING STATIONS (PAMS)**

**Introduction** - Current analyses indicate that pollutant concentrations in the United States have steadily declined over the past decade. However, many areas of the country continue to be troubled by pervasive and chronic ozone nonattainment problems. This is especially true of the northeastern United States in general and of Connecticut in particular. State and local air pollution control agencies have normally employed ozone control strategies that focus solely on reductions of volatile organic compound (VOC) emissions, which are common photochemical precursors of ozone. More recent data, however, suggest that the ozone abatement problem is more complex and requires the implementation of more varied and effective strategies.

**Background** - In order to meet the challenges faced by the state and local air pollution control agencies in attaining the National Ambient Air Quality Standards (NAAQS) for ozone, a more comprehensive ambient air quality database for ozone and its precursors was needed to explain the effects of ozone management strategies. To this end, the 1990 Clean Air Act Amendments (CAAA) required enhanced monitoring for ozone (O<sub>3</sub>) and oxides of nitrogen (NO<sub>x</sub>) and monitoring for VOC in ozone nonattainment areas classified as serious, severe or extreme. In particular, the United States Environmental Protection Agency (EPA) focused attention on several pertinent issues:

- (i) In addition to VOC limitations, examination of emission controls for NO<sub>x</sub>,
- (ii) Expanded monitoring of ozone precursors in order to confirm emissions trends, and
- (iii) Creation of ambient monitoring strategies to directly measure the success of implemented ozone precursor controls.

In order to comply with the requirements of the CAAA, the EPA promulgated final amendments to the ambient air quality surveillance rules on February 12, 1993, to provide for the enhanced monitoring of ozone, oxides of nitrogen, volatile organic compounds, including carbonyls, and meteorological parameters. These rules required the affected areas to establish Photochemical Assessment Monitoring Stations (PAMS) networks in ozone nonattainment areas classified as serious, severe or extreme.

**PAMS Monitoring Objectives** - PAMS design criteria are site specific. Concurrent measurements of O<sub>3</sub>, NO<sub>x</sub>, speciated VOC, and meteorology are obtained at PAMS. Design criteria for the PAMS network are based on a selection of an array of site locations relative to O<sub>3</sub> precursor source areas and predominant wind directions associated with high O<sub>3</sub> events. Specific monitoring objectives are associated with each location. The overall design should enable characterization of precursor emission sources within the area, transport of O<sub>3</sub> and its precursors into and out of the area, and the photochemical processes related to O<sub>3</sub> nonattainment. Specific objectives that must be addressed include assessing ambient trends in O<sub>3</sub>, NO, NO<sub>2</sub>, NO<sub>x</sub>, VOC (including carbonyls) and VOC species; determining spacial and diurnal variability of O<sub>3</sub>, NO, NO<sub>2</sub>, NO<sub>x</sub>, and VOC species; and assessing changes in the VOC species profiles that occur over time, particularly those occurring due to the reformulation of fuels.

A maximum of five PAMS sites are required in an affected nonattainment area depending on the population of either the Metropolitan Statistical Area / Consolidated Metropolitan Statistical Area (MSA/CMSA) or nonattainment area, whichever is larger. Specific monitoring objectives associated with each of these sites result in four distinct types of site.

Type (1) sites are established to characterize upwind background and transported O<sub>3</sub> and its precursor concentrations entering the area and will identify those areas which are subject to overwhelming transport. Type (1) sites are located in the predominant morning upwind direction from the local area of maximum precursor emissions.

Type (2) sites are established to monitor the magnitude and type of precursor emissions in the area where maximum precursor emissions are expected to impact. In addition, these sites are suited for the monitoring of urban air toxic pollutants. Type (2) sites are located immediately downwind of the area of maximum precursor emissions and are typically placed near the downwind boundary of the central business district to obtain neighborhood-scale measurements.

Type (3) sites are intended to monitor maximum O<sub>3</sub> concentrations occurring downwind from the area of maximum precursor emissions. Type (3) sites should be located so that urban-scale measurements are obtained, typically 10 to 30 miles from the fringe of the urban area.

Type (4) sites are established to characterize the extreme downwind transported O<sub>3</sub> and its precursor concentrations exiting the area and will identify those areas which are potentially contributing to overwhelming transport in other areas. Type (4) sites are located in the predominant afternoon downwind direction from the local area of maximum precursor emissions and at a distance sufficient to obtain urban-scale measurements.

**PAMS Monitoring Network** - In order to comply with the federal rules requiring states to establish PAMS networks in ozone nonattainment areas classified as serious or severe (see Figure 8-1), DEP operated a PAMS monitoring network consisting of three types of sites in 1997 (see Figure 4-7):

- Type (1) - Westport 003
- Type (2) - East Hartford 003
- Type (3) - Stafford 001

**PAMS Data** - As mentioned earlier, the EPA promulgated final amendments to the ambient air quality surveillance rules to provide for the enhanced monitoring of ozone, oxides of nitrogen, volatile organic compounds (including carbonyls) and meteorological parameters. As a result, detailed ambient pollutant and meteorological measurements are currently conducted or planned for the PAMS sites.

More than fifty hydrocarbons (C<sub>2</sub>-C<sub>12</sub>) compounds, along with ozone (O<sub>3</sub>), oxides of nitrogen (NO, NO<sub>2</sub>, NO<sub>x</sub>) are measured continuously during the summer (1-hour measurements from June through August). In addition, carbonyl measurements are taken at 3-hour sampling intervals at the East Hartford 003 site. Surface (10 meter) meteorological measurements are taken at all PAMS sites and include: wind speed, wind direction, air temperature, solar radiation and precipitation (Stafford 001 only). It is anticipated that one or more upper air meteorological stations may be deployed in the near future to record wind speed and direction and temperatures aloft, but this is only in the planning stage.

Table 4-3 lists all the volatile organic compounds presently being measured at the PAMS sites. The actual data are available from the Planning & Standards Division of the Bureau of Air Management. Interested parties should contact Alan Leston at (860) 424-3513.

**TABLE 4-1**  
**NUMBER OF HOURS WHEN THE 1-HOUR OZONE STANDARD**  
**WAS EXCEEDED IN 1997**


<u>SITE</u>	<u>APRIL</u>	<u>MAY</u>	<u>JUNE</u>	<u>JULY</u>	<u>AUG.</u>	<u>SEPT.</u>	<u>1997</u>	<u>1996</u>
Bridgeport 013	0	0	2	1	0	0	3	0
Danbury 123	0	0	5	2	1	0	8	0
E. Hartford 003	0	0	10	0	0	0	10	0
Greenwich 017	0	0	1	9	0	0	10	1
Groton 008	0	0	2	14	0	0	16	3
Madison 002	0	0	7	11	1	0	19	0
Middletown 007	0	0	8	0	0	0	8	2
New Haven 123	0	0	1	2	0	0	3	0
Stafford 001	0	0	13	0	0	0	13	0
Stratford 007	0	0	4	11	0	0	15	1
Torrington 006	0	0	0	0	0	0	0	0
Westport 003	0	0	3	12	0	0	15	3
TOTAL SITE HOURS	0	0	56	62	2	0	120	10

**TABLE 4-2**  
**NUMBER OF DAYS WHEN THE 1-HOUR OZONE STANDARD**  
**WAS EXCEEDED IN 1997**

<u>SITE</u>	<u>APRIL</u>	<u>MAY</u>	<u>JUNE</u>	<u>JULY</u>	<u>AUG.</u>	<u>SEPT.</u>	<u>1997</u>	<u>1996</u>
Bridgeport 013	0	0	1	1	0	0	2	0
Danbury 123	0	0	2	1	1	0	4	0
E. Hartford 003	0	0	2	0	0	0	2	0
Greenwich 017	0	0	1	2	0	0	3	1
Groton 008	0	0	1	3	0	0	4	1
Madison 002	0	0	3	2	1	0	6	0
Middletown 007	0	0	2	0	0	0	2	1
New Haven 123	0	0	1	1	0	0	2	0
Stafford 001	0	0	2	0	0	0	2	0
Stratford 007	0	0	3	3	0	0	6	1
Torrington 006	0	0	0	0	0	0	0	0
Westport 003	0	0	2	4	0	0	6	2
<b>TOTAL SITE DAYS</b>	<b>0</b>	<b>0</b>	<b>20</b>	<b>17</b>	<b>2</b>	<b>0</b>	<b>39</b>	<b>6</b>


# FIGURE 4-1

## WIND ROSE FOR JUNE- AUGUST 1996 STAFFORD 001 MONITORING SITE SHENIPSIT STATE FOREST

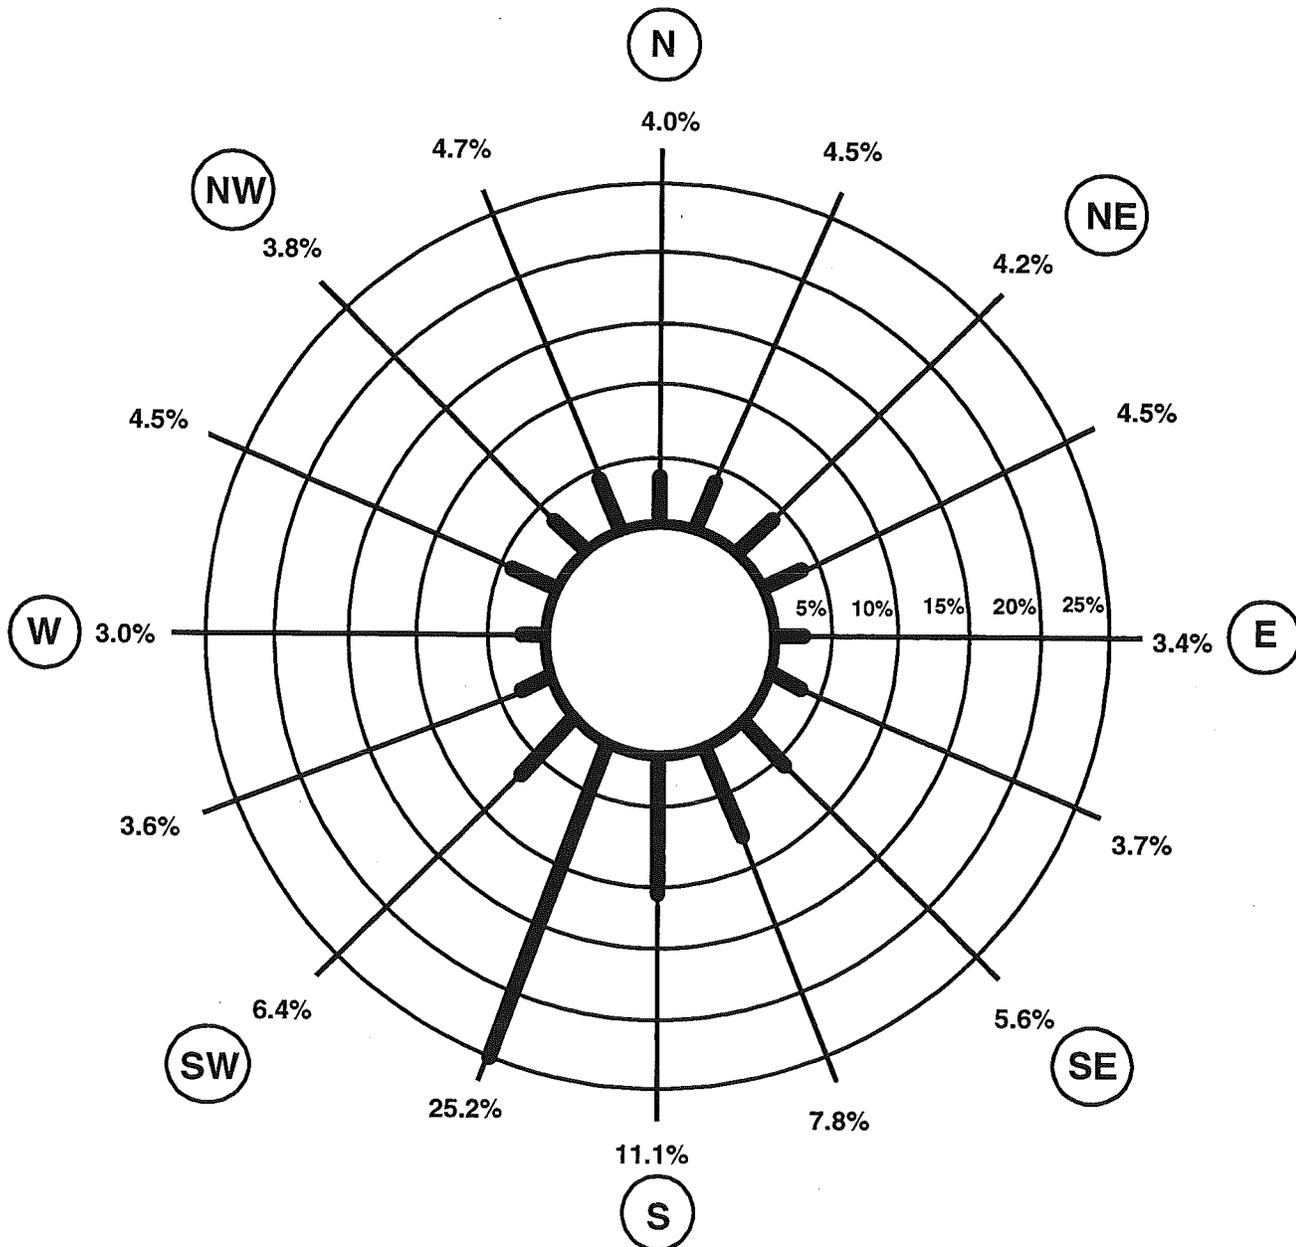

# FIGURE 4-2


## WIND ROSE FOR JUNE- AUGUST 1997 STAFFORD 001 MONITORING SITE SHENIPSIT STATE FOREST

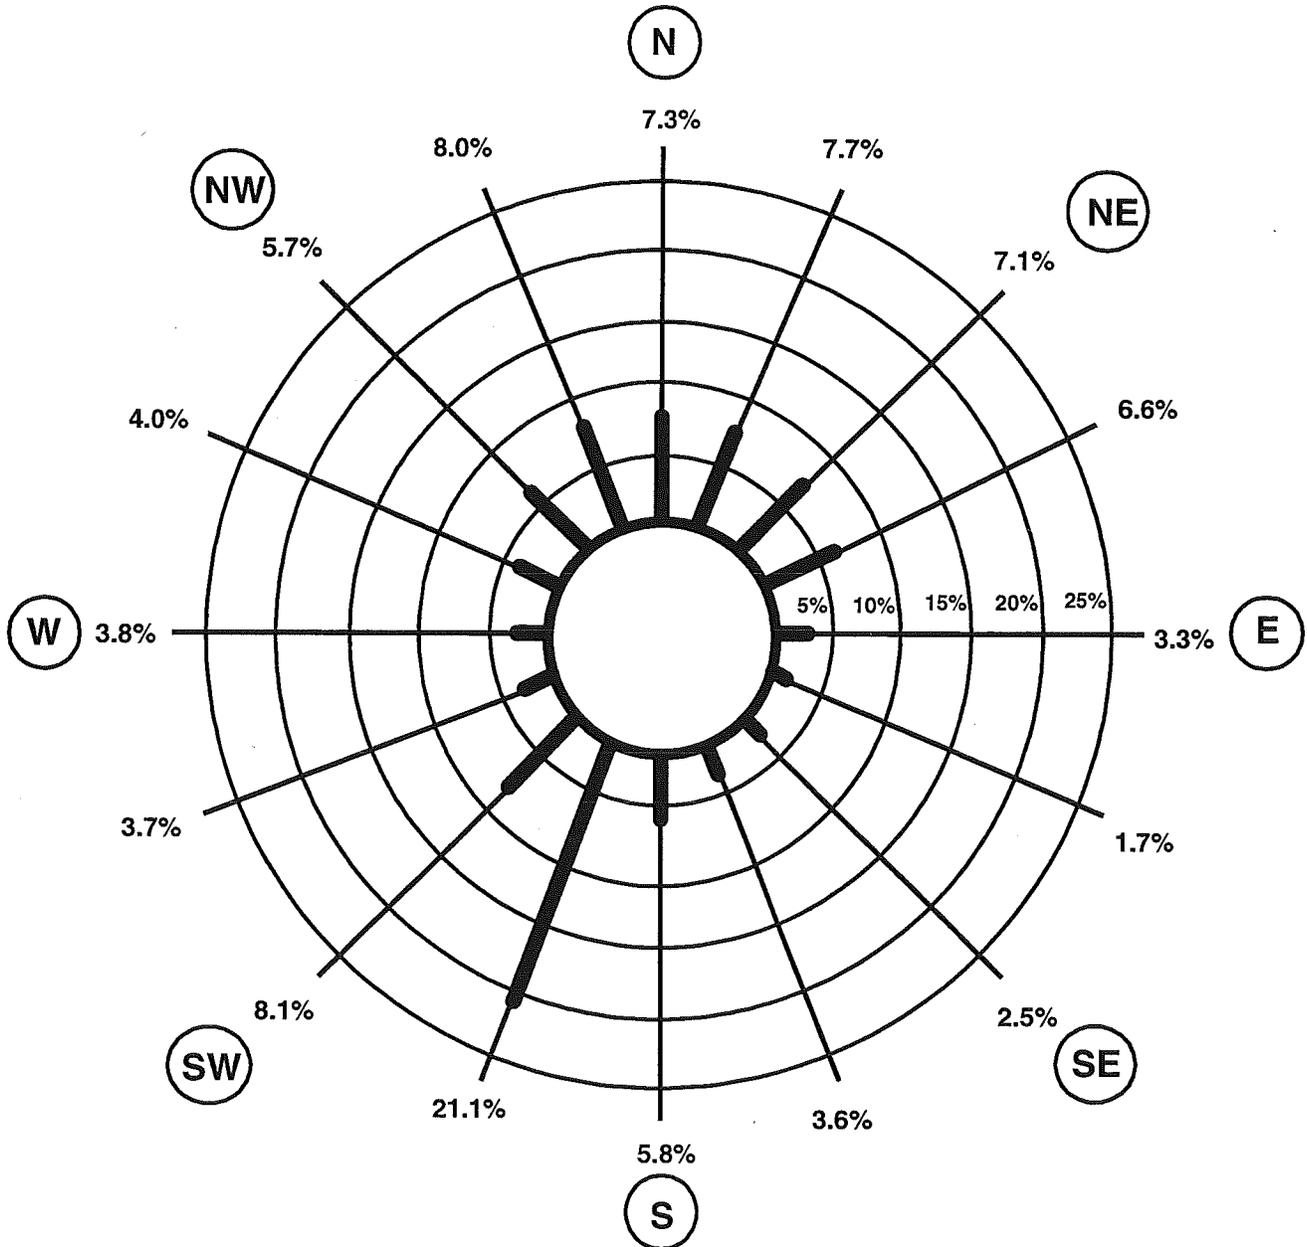



# FIGURE 4-4

## 1<sup>ST</sup> AND 2<sup>ND</sup> HIGH 1-HOUR OZONE CONCENTRATIONS IN 1997

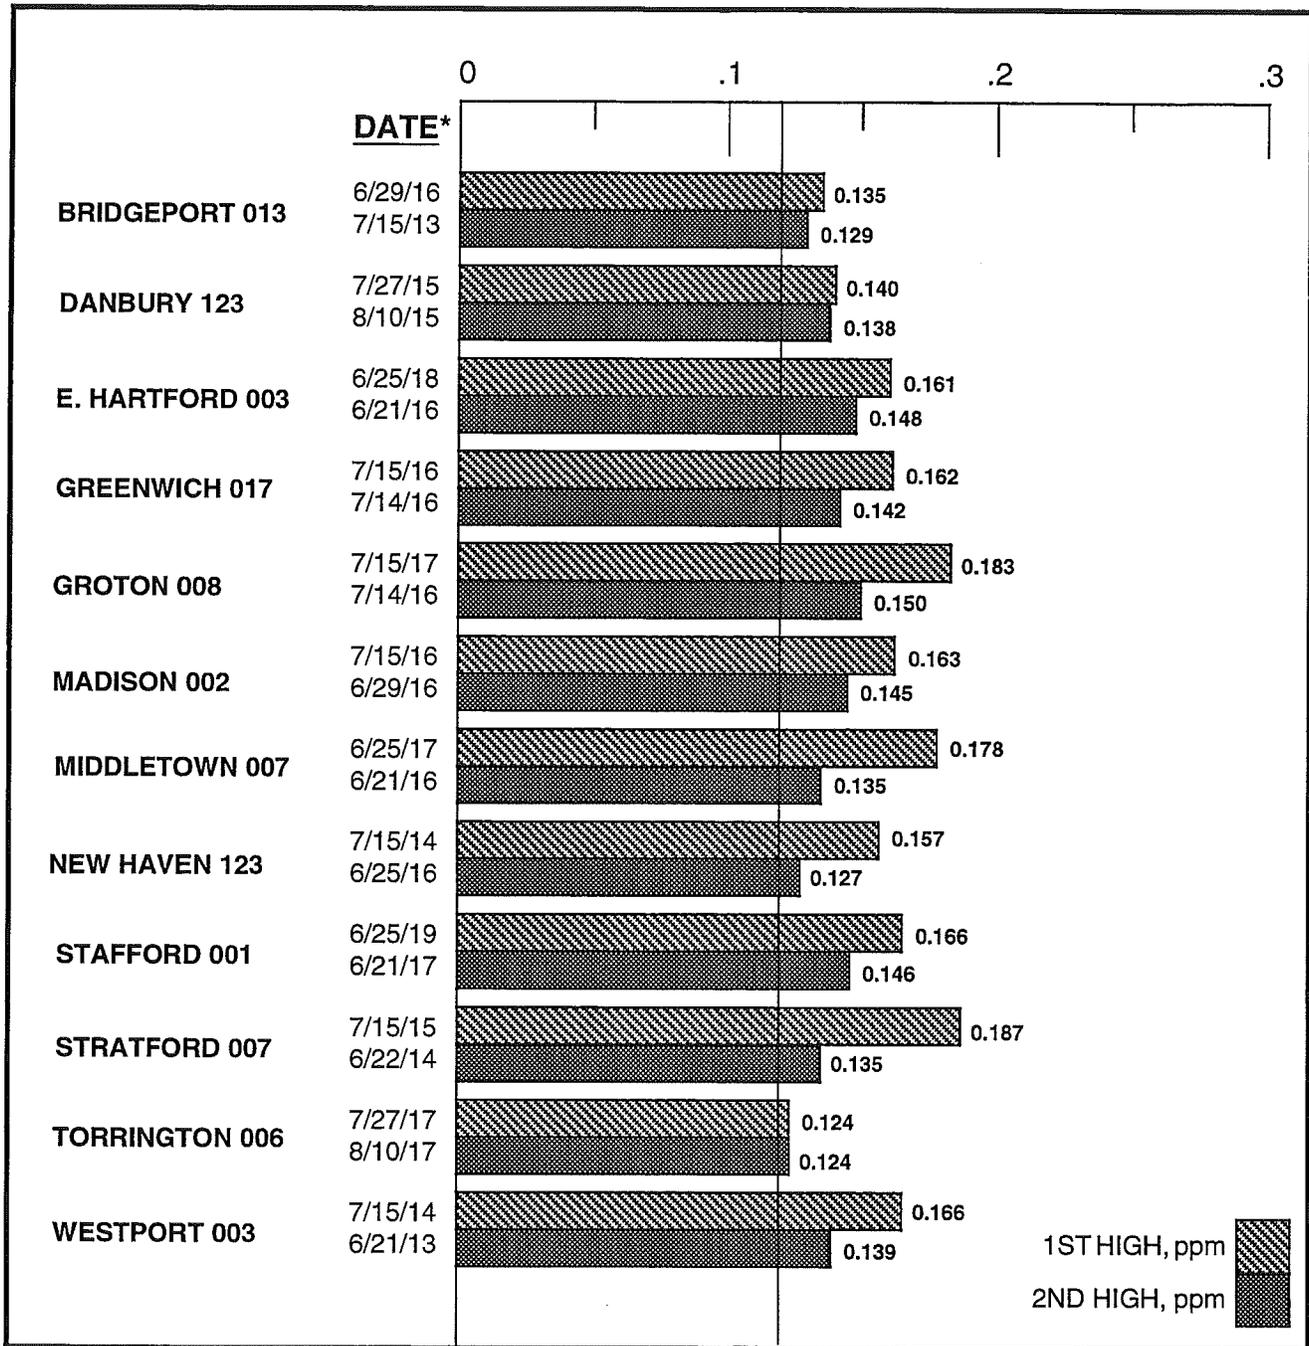


0.12


PRIMARY AND  
SECONDARY STANDARD

\* The date is the month/day/ending hour (standard time) of occurrence.  
 N.B. To be consistent with the requirements of the NAAQS for ozone, only the highest hourly concentration per day per site is considered.

**FIGURE 4-5**  
**AVERAGES OF THE ANNUAL MEAN DAILY MAXIMUM**  
**OZONE CONCENTRATIONS AT TEN SITES**

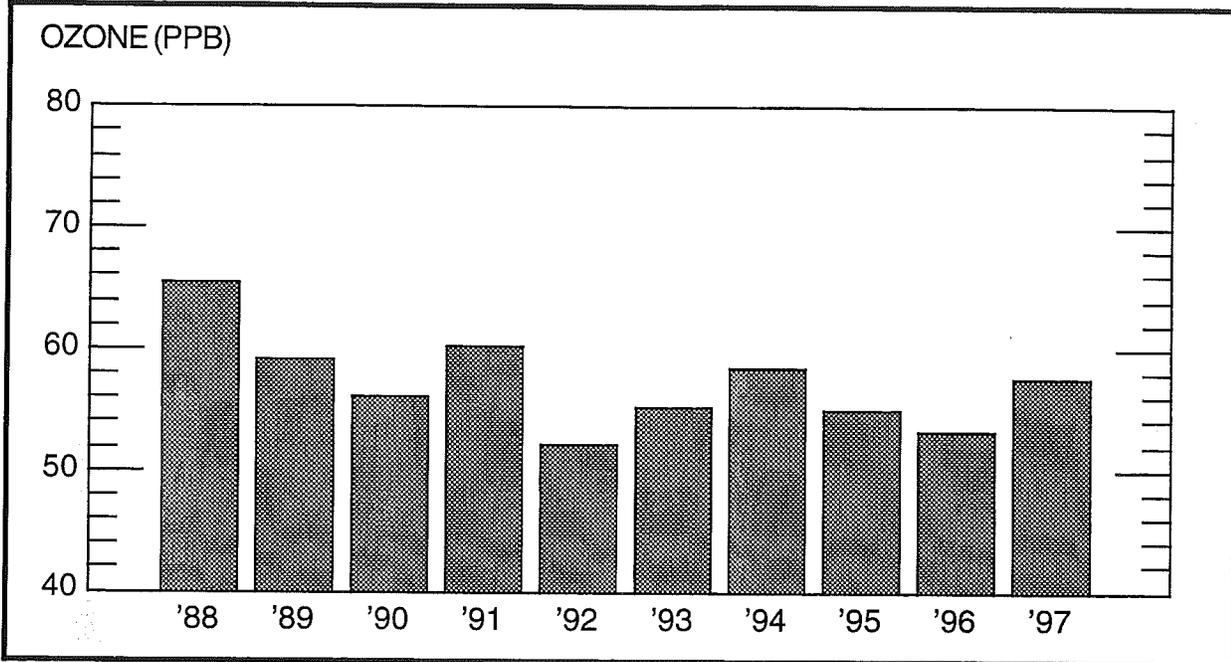

**FIGURE 4-6**  
**5-YEAR AVERAGES OF THE ANNUAL MEAN DAILY MAXIMUM**  
**OZONE CONCENTRATIONS AT TEN SITES**

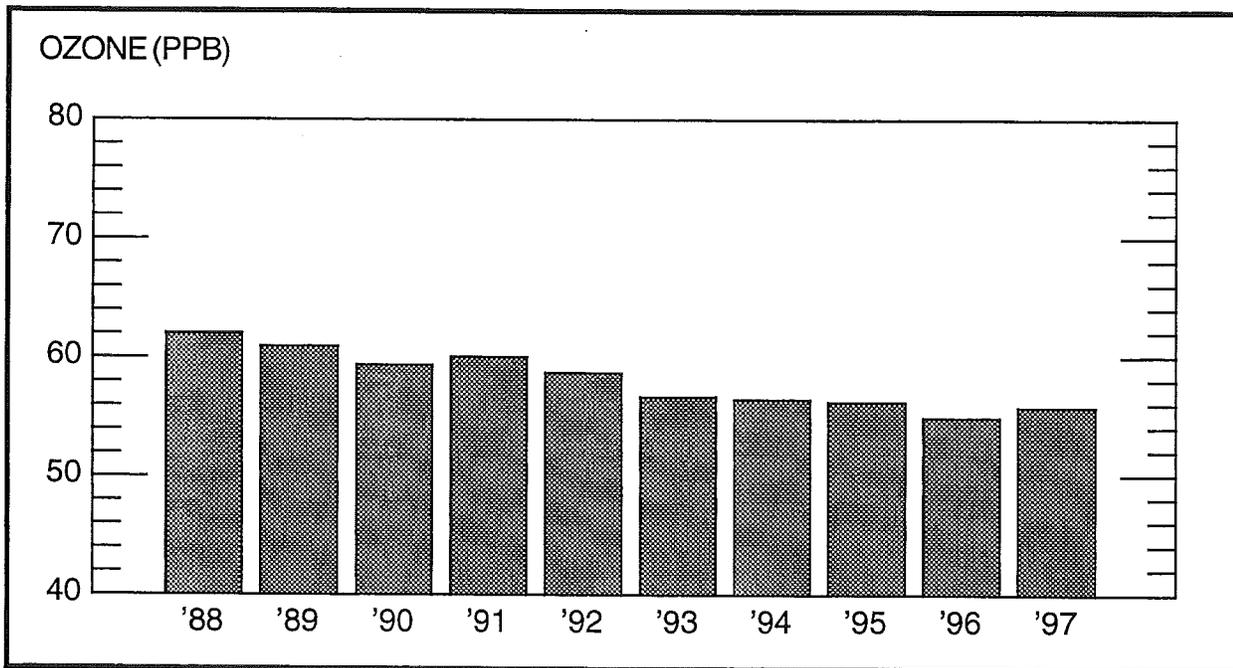

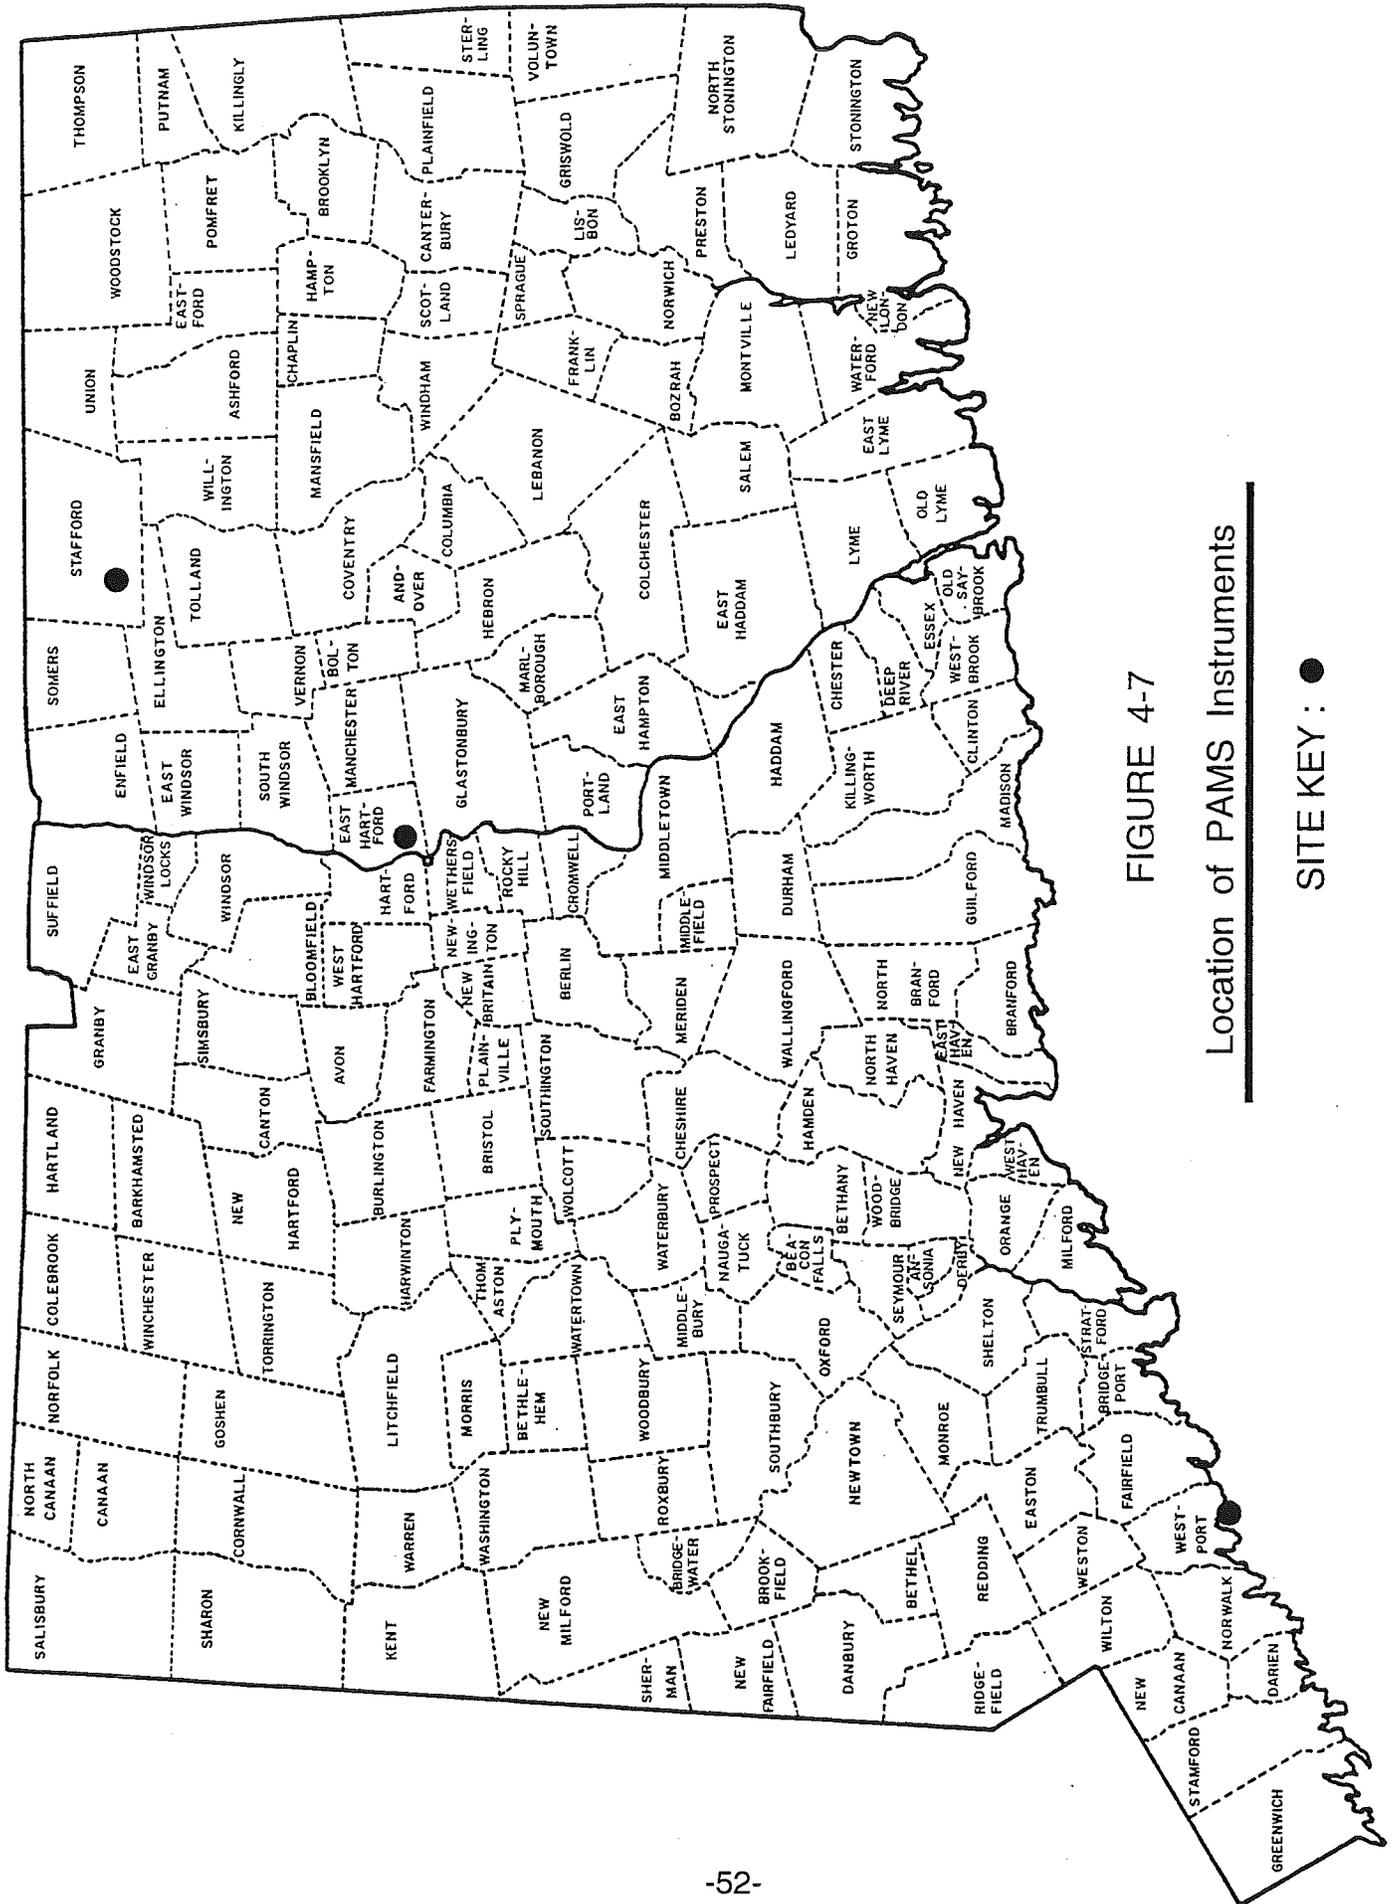


FIGURE 4-7

Location of PAMS Instruments

SITE KEY : ●

**TABLE 4-3****VOC MEASURED AT PAMS SITES**

Volatile Organic Compounds		
acetaldehyde <sup>1</sup>	n-dodecane	3-methylpentane
acetone <sup>1</sup>	ethane	methylcyclopentane
acetylene	ethene	2,4-dimethylpentane
benzene	formaldehyde <sup>1</sup>	2,3-dimethylpentane
m-diethylbenzene	n-heptane	2,2,4-trimethylpentane
p-diethylbenzene	2-methylheptane	2,3,4-trimethylpentane
ethylbenzene	3-methylheptane	1-pentene
iso-propylbenzene	n-hexane	cis-2-pentene
n-propylbenzene	cyclohexane	trans-2-pentene
1,3,5-trimethylbenzene	2-methylhexane	propane
1,2,4-trimethylbenzene	3-methylhexane	propene
1,2,3-trimethylbenzene	methylcyclohexane	styrene
iso-butane	1-hexene	toluene
n-butane	isoprene	m-ethyltoluene
2,2-dimethylbutane	n-octane	o-ethyltoluene
2,3-dimethylbutane	n-nonane	p-ethyltoluene
1-butene	n-pentane	n-undecane
cis-2-butene	iso-pentane	m,p-xylene
trans-2-butene	cyclopentane	o-xylene
n-decane	2-methylpentane	TNMHC <sup>2</sup>

<sup>1</sup> a carbonyl

<sup>2</sup> total non-methane hydrocarbons (C<sub>2</sub>-C<sub>12</sub>)

## V. NITROGEN DIOXIDE

### HEALTH EFFECTS

Nitrogen dioxide (NO<sub>2</sub>) is a toxic gas with a characteristic pungent odor and a reddish-orange-brown color. It is highly oxidizing and extremely corrosive.

The presence of NO<sub>2</sub> in the atmosphere is accounted for by the oxidation of nitric oxide (NO) to NO<sub>2</sub> by means of reactions with various chemical species, principally ozone, hydroperoxyl radicals and organic peroxy radicals. Large amounts of NO are emitted into the air by high temperature combustion processes. Industrial furnaces, power plants and motor vehicles are the primary sources of NO emissions.

Exposure to NO<sub>2</sub> is believed to increase the risks of acute respiratory disease and susceptibility to chronic respiratory infection. NO<sub>2</sub> also contributes to heart, lung, liver and kidney damage. At high concentrations, this pollutant can be fatal. At lower levels of 25 to 100 parts per million, it can cause acute bronchitis and pneumonia. Occasional exposure to low levels of NO<sub>2</sub> can irritate the eyes and skin.

Other effects of nitrogen dioxide are its toxicity to vegetation and its ability to combine with water vapor to form nitric acid. Furthermore, NO<sub>2</sub> is an essential ingredient, along with hydrocarbons, in the formation of ozone.

### CONCLUSIONS

Nitrogen dioxide (NO<sub>2</sub>) concentrations at all monitoring sites did not violate the NAAQS for NO<sub>2</sub> in 1997. The annual arithmetic mean NO<sub>2</sub> concentration at each site was well below the federal standard of 100 µg/m<sup>3</sup>. The highest annual mean was 44 µg/m<sup>3</sup>, which occurred at the New Haven 123 site.

### SAMPLE COLLECTION AND ANALYSIS

The DEP Air Monitoring Unit used continuous electronic analyzers employing the chemiluminescent reference method to continuously monitor NO<sub>2</sub> levels.

### DISCUSSION OF DATA

**Monitoring Network** - Three monitoring sites were operated in Connecticut in 1997 for the purpose of determining annual statistics for nitrogen dioxide (see Figure 5-1). The sites -- at Bridgeport, East Hartford and New Haven -- were located in three urban areas near major expressways in order to obtain maximum NO<sub>2</sub> readings.

**Precision and Accuracy** - One hundred precision checks were made on the NO<sub>2</sub> monitors in 1997, yielding 95% probability limits ranging from -10% to +6%. Accuracy is determined by introducing a known amount of NO<sub>2</sub> into each of the monitors. Eight audits for accuracy were conducted on the monitoring network in 1997. Three different concentration levels were tested on each monitor: low, medium, and high. The 95% probability limits for the low level test ranged from -11% to 0%; those for the medium level test ranged from -9% to -14%; and those for the high level test ranged from -8% to +4%.

**Annual Averages** - The annual average NO<sub>2</sub> standard of 100 µg/m<sup>3</sup> was not exceeded in 1997 at any site in Connecticut (see Table 5-1). In addition, the three sites had sufficient data to compute valid arithmetic means. This permits some comparisons with the 1995 and 1996 annual averages. Both Bridgeport and New Haven show a decrease in annual average NO<sub>2</sub> concentrations from 1995 and 1997.

**Statistical Projections** - The format of Table 5-1 is the same as that used to present the particulate matter and sulfur dioxide data, except that for NO<sub>2</sub> there are no 24-hour standards and, therefore, no projections of violations are possible. However, Table 5-1 gives the annual arithmetic mean of the hourly NO<sub>2</sub> concentrations in order to allow direct comparison to the annual NO<sub>2</sub> standard. The 95% confidence limits about the arithmetic mean for each site demonstrate that it is unlikely that any site exceeded the primary annual standard of 100 µg/m<sup>3</sup> in 1997.

**Highest Hourly Concentrations and Wind Data** - As was the case with particulate matter, sulfur dioxide and ozone, the highest NO<sub>2</sub> concentrations occur most often on days when persistent winds out of the southwest quadrant predominate. During the ten year period between 1986 and 1995, 68% of the annual ten highest hourly NO<sub>2</sub> concentrations at each monitoring site in the state occurred on days when such wind conditions prevailed. This is not unexpected since the NO<sub>2</sub> monitoring sites were deliberately located to the north and east of major expressways and interchanges, which are major sources of nitrogen oxide emissions. Moreover, high NO<sub>2</sub> levels coincident with southwest winds confirm the importance of pollution transport into Connecticut from the southwest.

In addition, according to National Weather Service local climatological data recorded at Bradley Airport, 75% of the high NO<sub>2</sub> days had at least 50% of the possible sunshine. A high percentage of the possible sunshine is interpreted to confirm the importance of photochemical oxidation in the formation of NO<sub>2</sub>.

**Trends** - The weighted averages of the annual NO<sub>2</sub> concentrations at the three monitoring sites are illustrated in Figure 5-2. The year-to-year variation appears to be quite choppy. In spite of this, a slight downward trend in the annual NO<sub>2</sub> concentrations can be detected.

Given the importance of meteorology -- sunlight, in general, and southwest winds in Connecticut, in particular -- on the formation of NO<sub>2</sub>, a trend might best be illustrated by the averaging of data over multiple years. As was the case with ozone, a trend based on multiple years of data should diminish the effect of meteorology and, thereby, reveal the effect of nitrogen oxide and hydrocarbon emission controls on ambient concentrations of NO<sub>2</sub>. Figure 5-3 shows that the 5-year average NO<sub>2</sub> concentration, with the influence of meteorology minimized, has been trending downward over the past ten years.

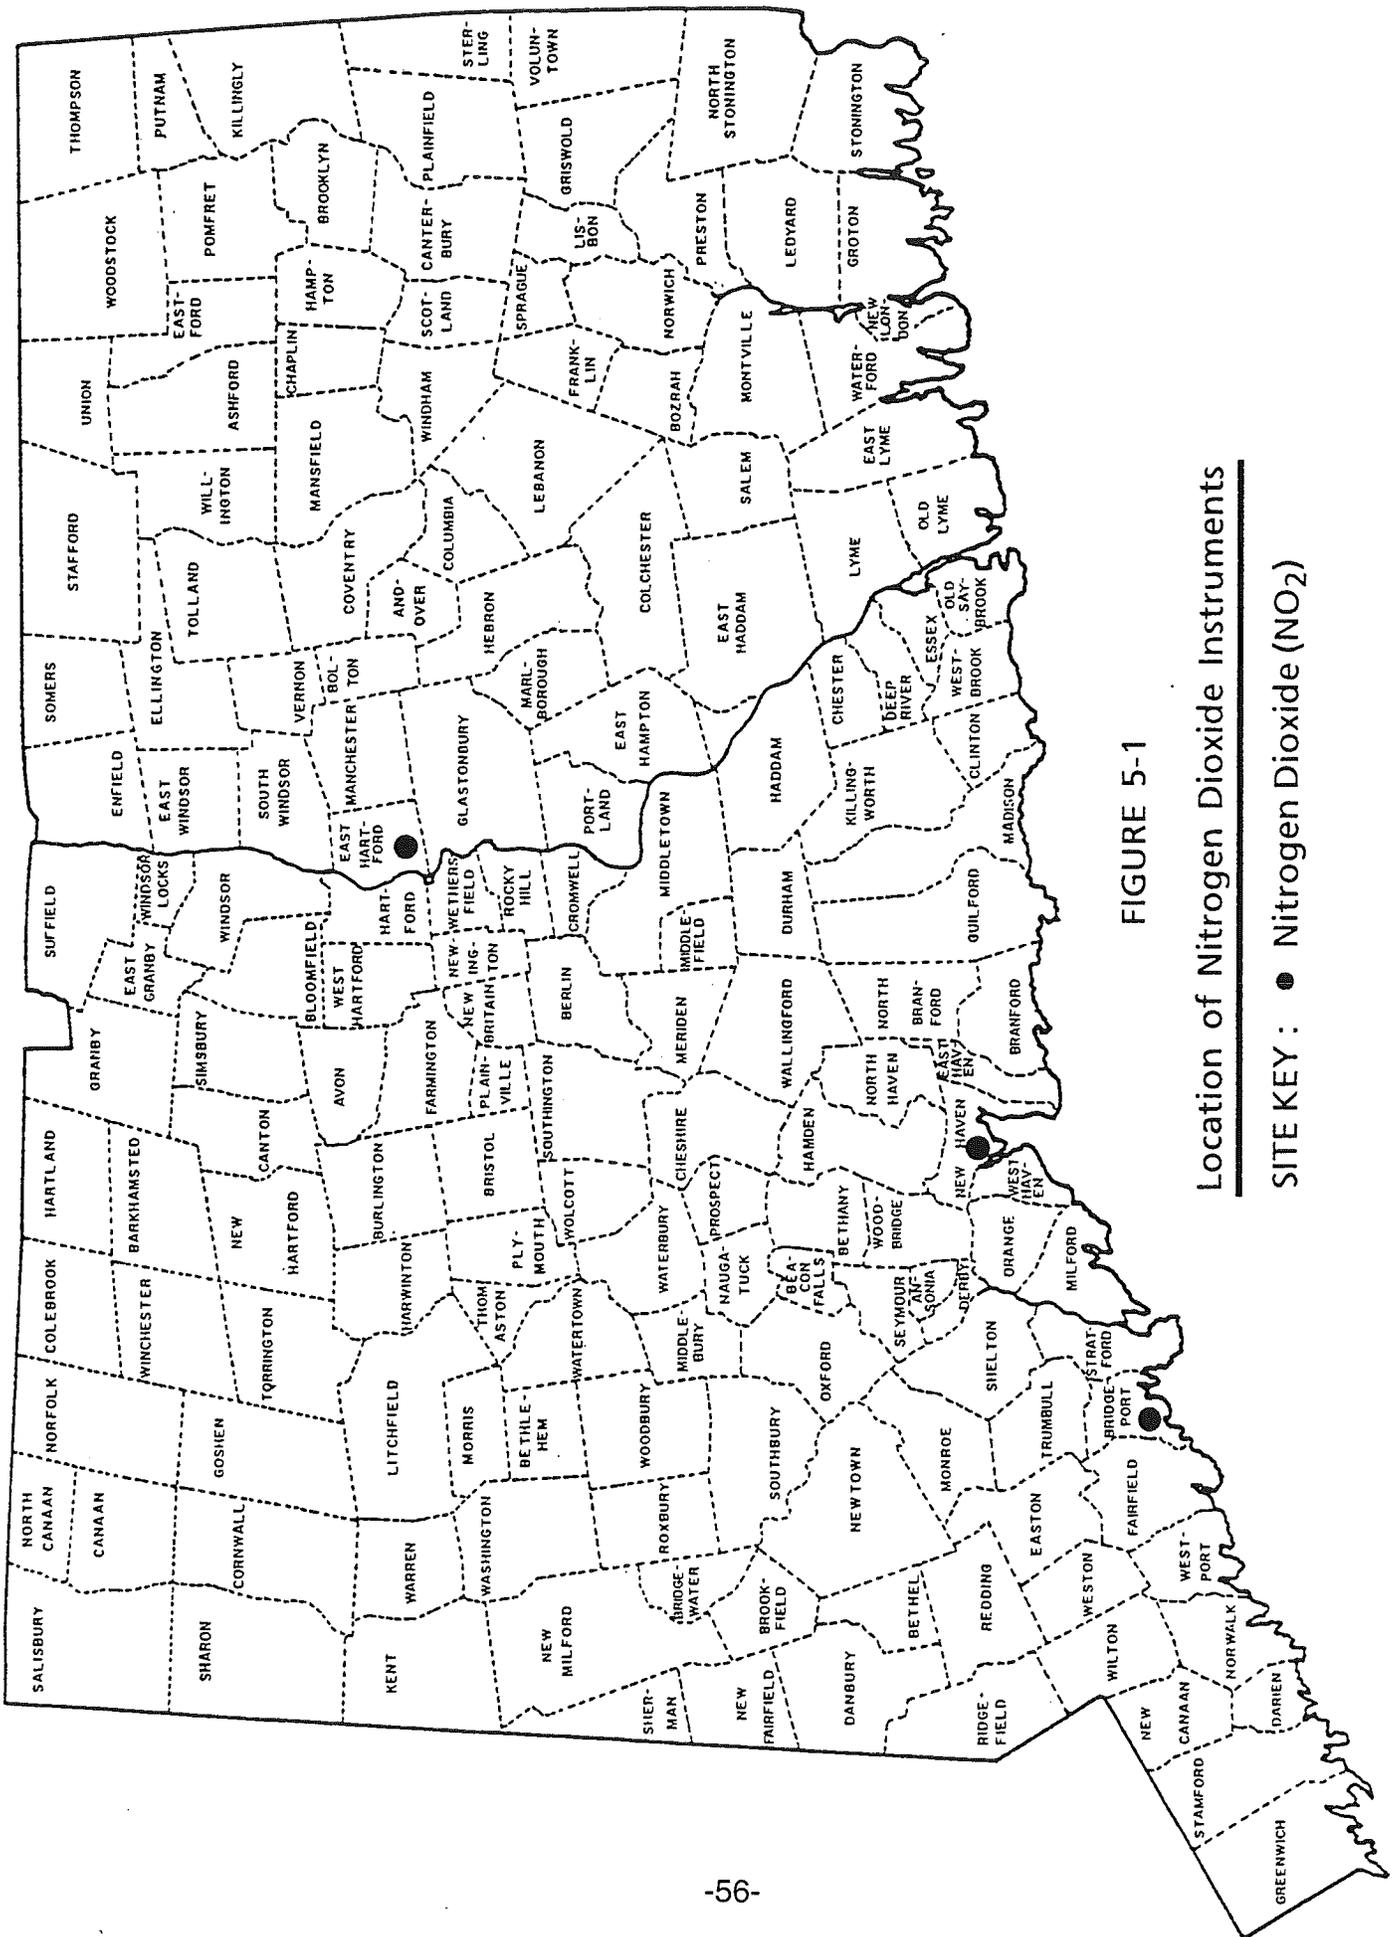


FIGURE 5-1  
 Location of Nitrogen Dioxide Instruments

SITE KEY : ● Nitrogen Dioxide (NO<sub>2</sub>)


**TABLE 5-1**  
**1995 -1997 NITROGEN DIOXIDE ANNUAL AVERAGES**

<u>Town Name</u>	<u>Site</u>	<u>Year</u>	<u>Samples</u>	<u>Arithmetic Mean</u>	<u>95-Percent-Limits Lower</u>	<u>95-Percent-Limits Upper</u>	<u>Standard Deviation</u>
Bridgeport	013	1995	8520	45.68	45.59	45.77	25.16
Bridgeport	013	1996	8119	44.23	44.09	44.38	24.66
Bridgeport	013	1997	8414	42.52	42.42	42.61	22.83
East Hartford	003	1995	8496	31.21	31.13	31.29	22.05
East Hartford*	003	1996	4575	29.73	29.22	30.24	25.59
East Hartford*	003	1997	7671	33.68	33.51	33.86	21.75
New Haven	123	1995	8262	47.67	47.54	47.79	23.58
New Haven	123	1996	8366	48.42	48.32	48.52	22.72
New Haven	123	1997	8525	44.37	44.29	44.44	21.44


\* The site was shut down from July, 1996 through January 23, 1997 due to construction in the area.

N.B. The arithmetic mean and associated statistics have units of  $\mu\text{g}/\text{m}^3$ .

**FIGURE 5-2**  
**AVERAGES OF THE ANNUAL NO<sub>2</sub> CONCENTRATIONS AT THREE SITES**

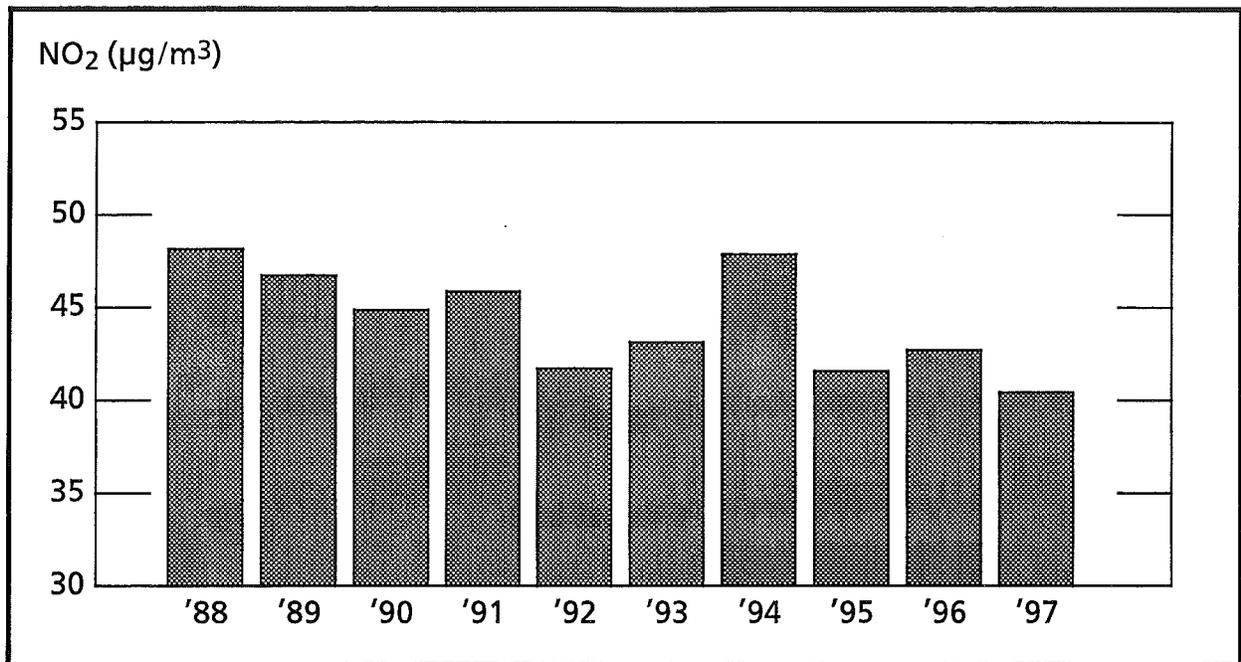

**FIGURE 5-3**  
**5-YEAR AVERAGES OF THE ANNUAL NO<sub>2</sub> CONCENTRATIONS AT THREE SITES**

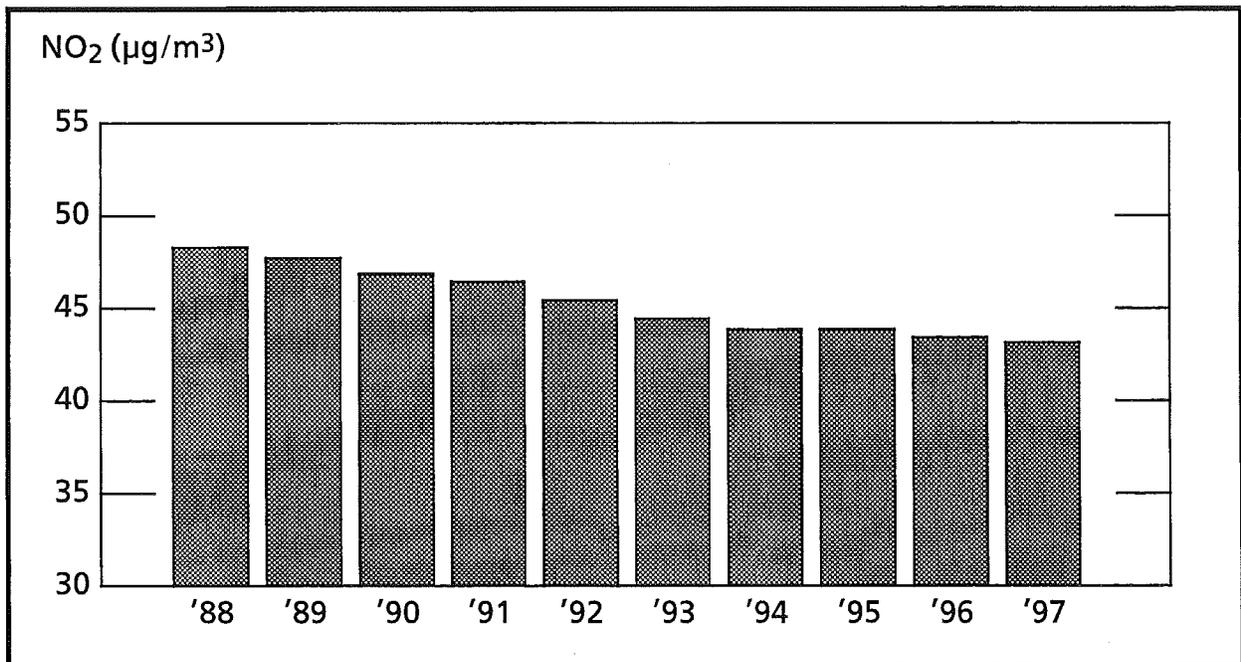

## **VI. CARBON MONOXIDE**

### **HEALTH EFFECTS**

Carbon monoxide (CO) is a colorless, odorless, poison gas formed when carbon-containing fuel is not burned completely. It is by far the most plentiful air pollutant. Fortunately, this deadly gas does not persist in the atmosphere. It is apparently converted by natural processes to carbon dioxide in ways not yet understood, and this is done quickly enough to prevent any general buildup. However, CO can reach dangerous levels in local areas, such as city-street canyons with heavy auto traffic and little wind.

Clinical experience with accidental CO poisoning has shown clearly how it affects the body. When the gas is breathed, CO replaces oxygen in the red blood cells, reducing the amount of oxygen that can reach the body cells and maintain life. Lack of oxygen affects the brain, and the first symptoms are impaired perception and thinking. Reflexes are slowed, judgement weakened, and drowsiness ensues. An auto driver breathing high levels of CO is more likely to have an accident; an athlete's performance and skill drop suddenly. Lack of oxygen then affects the heart. Death can come from heart failure or general asphyxiation if a person is exposed to very high levels of CO.

### **CONCLUSIONS**

Neither the one-hour National Ambient Air Quality Standard of 35 parts per million (ppm) nor the 8-hour standard of 9 ppm was exceeded at any of the five carbon monoxide monitoring sites in Connecticut during 1997.

In order to put the monitored data into proper perspective, it must be realized that carbon monoxide concentrations vary greatly from place-to-place. The magnitude and frequency of high concentrations observed at any monitoring site are not necessarily indicative of widespread CO levels. Mobile sources contribute 83% of the CO emissions in Connecticut, and three quarters of this can be attributed to motor vehicles. Therefore, the highest concentrations occur in areas of traffic congestion. In fact, 4 of the 5 CO monitors in Connecticut are sited specifically to measure CO levels from high traffic areas. The fifth monitor (Hartford 013) is located in a populated area and represents background levels of a neighborhood scale.

As Connecticut's SIP control strategies are implemented, there should continue to be a decrease in the number of areas with traffic congestion. Also, as federal and state mandated controls continue to reduce emissions from new motor vehicles, ambient levels of CO should continue to decline.

Unlike SO<sub>2</sub>, particulate matter, and O<sub>3</sub>, elevated CO levels are not often associated with winds out of the southwest quadrant, indicating that this pollutant is more of a local-scale, rather than a regional-scale, problem. Moreover, high CO levels tend to occur during the colder months when there are low atmospheric mixing heights, stable conditions and high CO auto emissions due to cold engine operation. Stable conditions, which are characterized by cold temperatures at the surface and warm temperatures aloft, discourage surface mixing and result in calm surface conditions. With little or no surface winds, CO emissions can accumulate to unhealthy levels.

### **METHOD OF MEASUREMENT**

The DEP Air Monitoring Section uses instruments employing a non-dispersive infrared technique to continuously measure carbon monoxide levels. The instantaneous concentrations are electronically

recorded at the site, averaged for each hour, and stored for transmission to the central computer in Hartford. Due to the relative inertness of CO, a long sampling line can be used without the danger of CO being depleted by chemical reactions within the line. The most important consideration in the measurement of CO is the placement of the sampling probe inlet -- that is, its proximity to traffic lanes.

## DISCUSSION OF DATA

**Monitoring Network** - The monitoring network in 1997 consisted of five carbon monoxide monitoring sites: Bridgeport, Hartford 013, Hartford 017, New Haven, and Stamford. They are all located in urban areas. All the sites are also located west of the Connecticut River, with three of them in coastal towns (see Figure 6-1). The Hartford 017 site was temporarily shut down in February of 1996 due to local construction work and was reactivated on April 30, 1997, when the work was completed.

**Precision and Accuracy** - The carbon monoxide monitors had a total of 216 precision checks during 1997. The resulting 95% probability limits were -4% to +6%. Accuracy is determined by introducing a known amount of CO into each of the monitors. Eight audits for accuracy were conducted on the monitoring network in 1997. Three different concentration levels were tested on each monitor: low, medium and high. The 95% probability limits ranged from -8% to +4% for the low level test; -5% to +2% for the medium level test; and -2% to +3% for the high level test.

**8-Hour and 1-Hour Averages** - An 8-hour concentration is said to exceed the standard of 9 ppm if it is equal to or greater than 9.5 ppm. No site had an exceedance of the 8-hour CO standard, which means that the 8-hour standard was not violated in Connecticut in 1997. The maximum 8-hour running average increased from 1996 to 1997 at each of the four sites that operated for most of the two year period. The increases ranged from 1.4 ppm at both Bridgeport and Stamford to 0.1 ppm at Hartford 013. The second highest 8-hour running average also increased at each of the four sites. The increases ranged from 1.0 ppm at Bridgeport to 0.2 ppm at Hartford 013.

As for 1-hour averages, no site in the state recorded a value exceeding the primary 1-hour standard of 35 ppm. All four sites that were in operation for most of 1996 and 1997 recorded maximum 1-hour values that were higher in 1997. The increases ranged from 3.3 ppm at Bridgeport to 0.3 ppm at Hartford 013. The second high 1-hour values at all these sites were also higher in 1997. The increases ranged from 3.1 ppm at Bridgeport to 0.2 ppm at Hartford 013.

The maximum and second high CO concentrations at each site are presented in Table 6-1. Table 6-2 presents monthly high concentrations and the monthly average concentration at each site. Seasonal variations in CO levels can be observed using this table.

**Trends** - Due to the local nature of CO emissions, it is not appropriate to give an estimate of widespread CO trends. However, local CO trends can be addressed in a number of ways. Exceedances of the 8-hour standard can be tracked in order to determine if a CO problem is worsening or abating at a site. This is illustrated in Table 6-3. One can see that over the past five years the Hartford-017 site is the only monitoring site with an exceedance of the 8-hour CO standard. No exceedances were recorded at any of the other sites during this period.

A better way of illustrating local CO trends is to use running averages. Running averages have the advantage of smoothing out the abrupt, transitory changes in CO levels that are often evident in consecutive sampling periods and from one season to the next. Figure 6-2 shows the 36-month running averages of the hourly CO concentrations at each monitoring site. CO levels are relatively flat at Hartford 013 and are trending downward slightly at Bridgeport, Hartford 017 and Stamford. The New Haven site, having been in operation only since February of 1995, lacks sufficient data for inclusion in Figure 6-2.

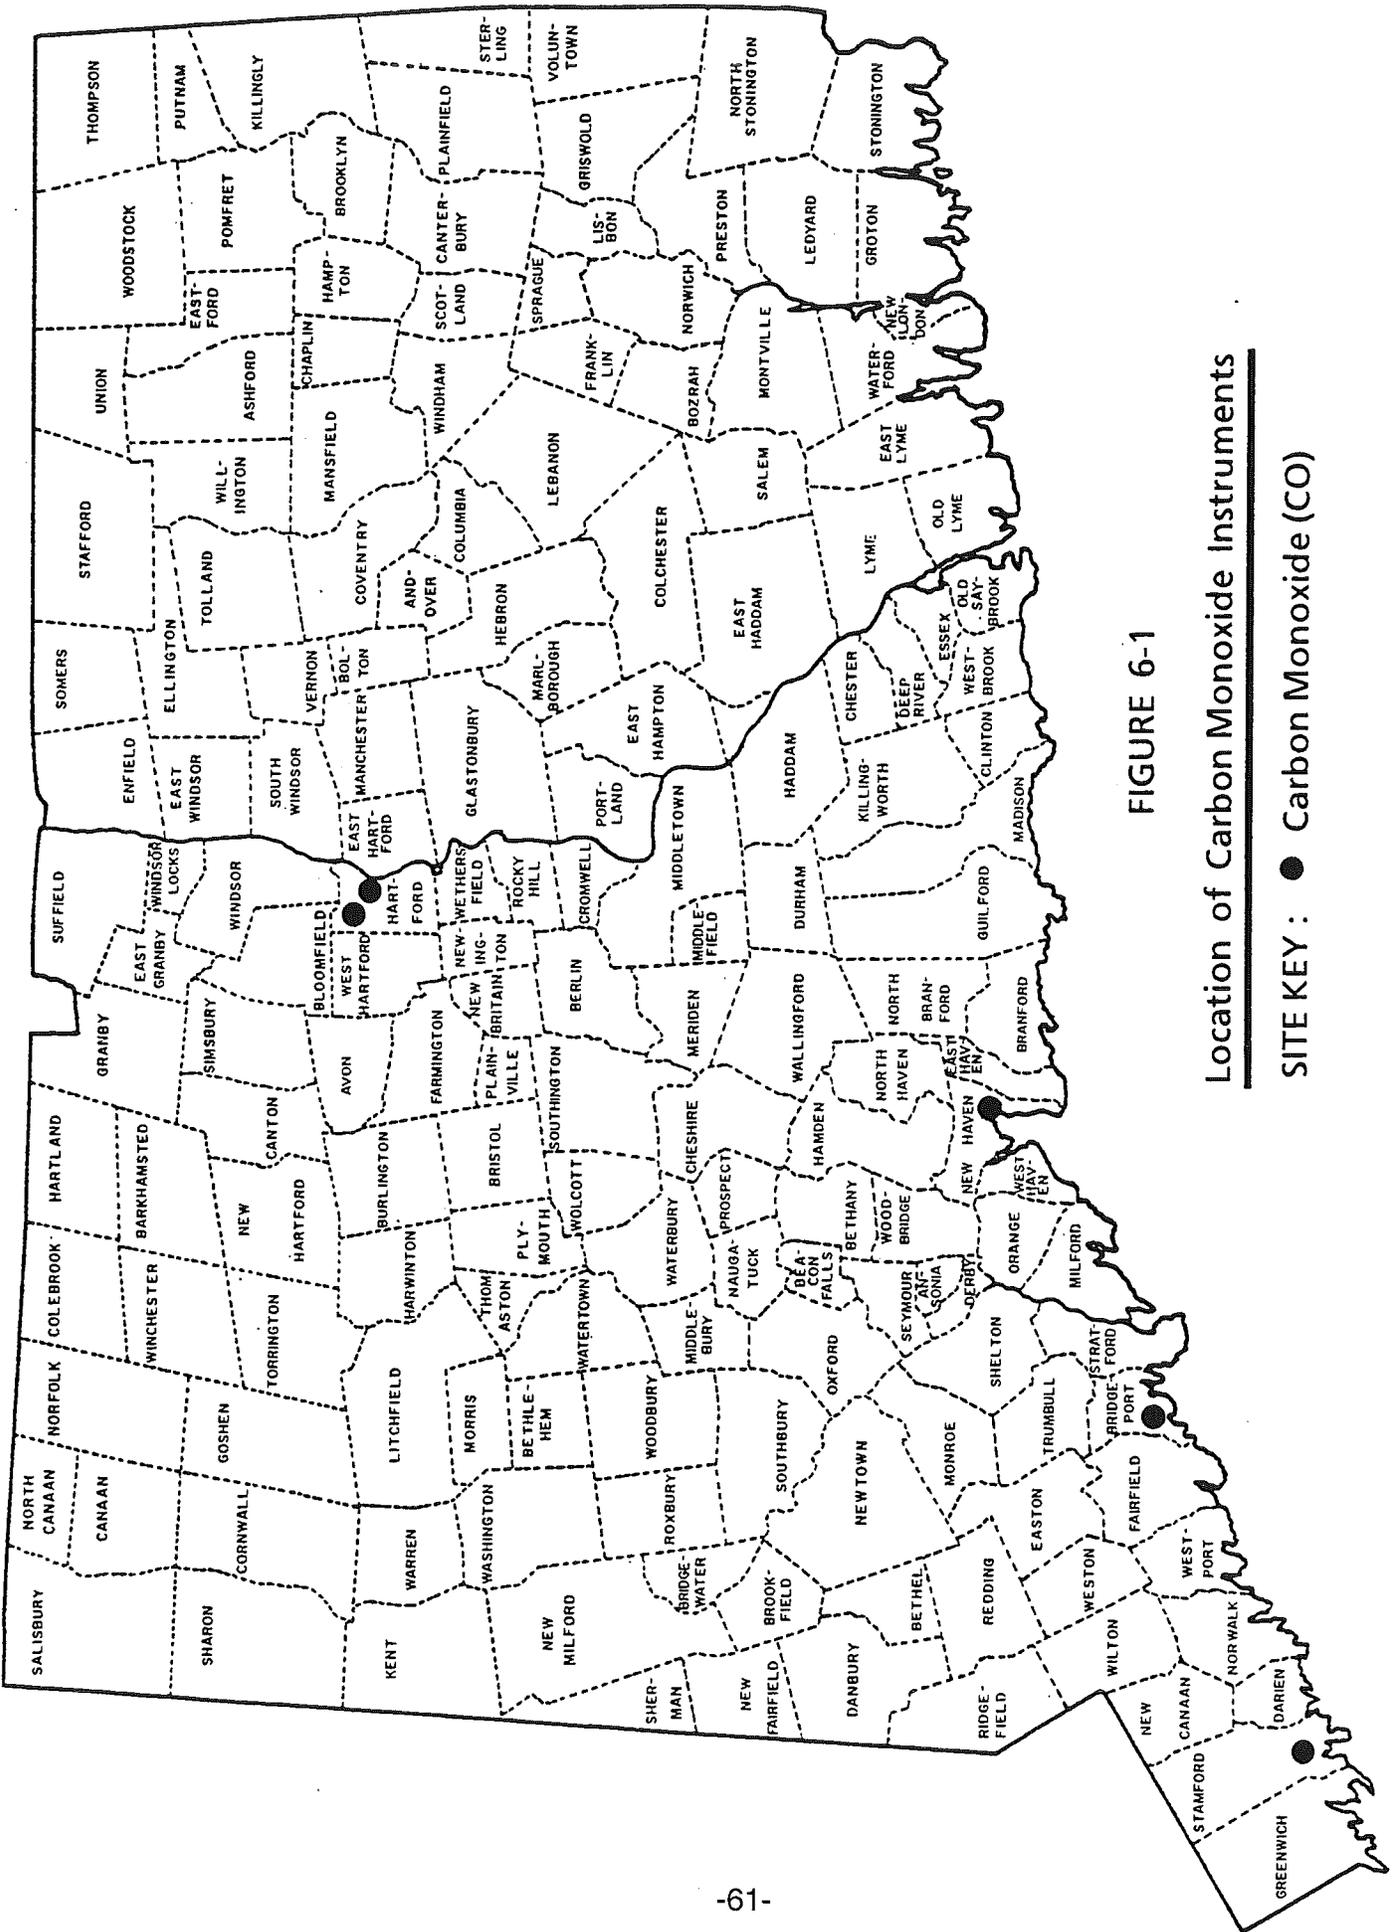


FIGURE 6-1  
 Location of Carbon Monoxide Instruments  
 SITE KEY : ● Carbon Monoxide (CO)

**TABLE 6-1**  
**1997 CARBON MONOXIDE STANDARDS ASSESSMENT SUMMARY**

TOWN-SITE	TIME OF		TIME OF		TIME OF		TIME OF	
	MAXIMUM 8-HOUR RUNNING AVERAGE	2ND HIGH 8-HOUR RUNNING AVERAGE <sup>1</sup>	2ND HIGH 8-HOUR RUNNING AVERAGE <sup>1</sup>	MAXIMUM 1-HOUR AVERAGE	MAXIMUM 1-HOUR AVERAGE <sup>2</sup>	2ND HIGH 1-HOUR AVERAGE	2ND HIGH 1-HOUR AVERAGE <sup>2</sup>	TIME OF 2ND HIGH 1-HOUR AVERAGE <sup>2</sup>
Bridgeport 004	5.6	4.0	12/17/01	12/16/20	8.2	01/03/18	7.8	12/16/21
Hartford 013	4.0	3.7	12/17/04	12/17/11	4.6	12/17/10	4.4	12/16/24
Hartford 017 <sup>3</sup>	6.1	5.9	12/03/21	10/30/23	12.5	10/30/18	11.7	12/03/17
New Haven 025	4.2	3.9	12/17/01	01/03/19	7.3	12/16/19	7.1	01/03/18
Stamford 020	5.7	5.1	12/16/24	12/03/24	8.0	01/03/18	8.0	12/16/20

<sup>1</sup> The time of the 8-hour average is reported as follows: month/day/hour (EST), specifying the end of the 8-hour period.

<sup>2</sup> The time of the 1-hour average is reported as follows: month/day/hour (EST), specifying the end of the 1-hour period.

<sup>3</sup> This site was closed down in February, 1996 due to nearby construction work and was reactivated on 04/30/97 when the work was completed.

N.B. The CO averages are expressed in terms of parts per million (ppm).

**TABLE 6-2**

**1997 CARBON MONOXIDE SEASONAL FEATURES**

<u>TOWN-SITE</u>	<u>AVERAGING PERIOD</u>	<u>JAN</u>	<u>FEB</u>	<u>MAR</u>	<u>APR</u>	<u>MAY</u>	<u>JUN</u>	<u>JUL</u>	<u>AUG</u>	<u>SEP</u>	<u>OCT</u>	<u>NOV</u>	<u>DEC</u>
Bridgeport 004	Max. 1-Hour	8.2	2.0	3.6	3.3	2.5	2.1	2.8	2.5	2.3	4.1	4.5	7.8
	Max. Running 8-Hour	3.8	1.6	2.3	2.1	1.8	1.8	1.6	1.6	1.8	2.9	3.0	5.6
	Month	1.0	0.9	0.9	0.9	1.0	0.9	0.9	1.0	1.0	0.9	1.0	1.2
Hartford 013	Max. 1-Hour	4.0	2.2	2.8	2.1	1.3	1.3	1.1	1.9	1.7	3.3	4.1	4.6
	Max. Running 8-Hour	3.1	1.6	2.7	1.5	1.1	1.0	1.0	1.4	1.3	3.0	3.6	4.0
	Month	0.8	0.8	0.7	0.6	0.6	0.6	0.6	0.7	0.6	0.8	0.9	1.1
Hartford 017*	Max. 1-Hour					8.6	4.1	5.1	5.1	4.5	12.5	7.8	11.7
	Max. Running 8-Hour					4.0	2.9	3.8	3.4	3.1	5.9	4.5	6.1
	Month					1.2	1.3	1.5	1.5	1.5	1.8	1.8	2.2
New Haven 025	Max. 1-Hour	7.1	2.7	4.7	2.5	1.8	1.6	2.0	2.2	2.4	4.8	4.9	7.3
	Max. Running 8-Hour	3.9	1.9	2.6	1.6	1.4	1.3	1.5	1.9	1.5	3.2	3.0	4.2
	Month	0.9	0.9	0.9	0.8	0.7	0.7	0.8	0.9	0.9	1.0	1.0	1.2
Stamford 020	Max. 1-Hour	8.0	4.7	4.8	3.7	3.6	3.1	2.6	3.0	3.3	5.4	5.7	8.0
	Max. Running 8-Hour	4.7	3.4	3.4	2.9	2.0	2.3	1.9	2.1	2.3	3.2	3.9	5.7
	Month	1.5	1.5	1.4	1.2	1.1	1.0	1.0	1.1	1.3	1.4	1.5	1.8
NETWORK	Month	1.1	1.0	1.0	0.9	0.9	0.9	0.9	1.0	1.1	1.2	1.2	1.5

\* This site was closed down in February, 1996 due to nearby construction work. The site was reactivated on April 30, 1997 when the work was completed. N.B. The CO concentrations are in terms of parts per million (ppm).

## TABLE 6-3

### EXCEEDANCES OF THE 8-HOUR CO STANDARD FOR 1993-1997


<u>SITE</u>	<u>1993</u>	<u>1994</u>	<u>1995</u>	<u>1996</u>	<u>1997</u>
Bridgeport 004	0	0	0	0	0
Hartford 013	0	0	0	0	0
Hartford 017	0	0	1	0a	0a
New Haven 019/025 <sup>b</sup>	0	0	0	0	0
Stamford 020	0	0	0	0	0

<sup>a</sup> The site was closed down in February of 1996 due to nearby construction work and was reactivated on April 30, 1997 when the work was completed.

<sup>b</sup> Site 025 replaced site 019 in February of 1995.

**FIGURE 6-2**

**36-MONTH RUNNING AVERAGES OF THE HOURLY CO CONCENTRATIONS**

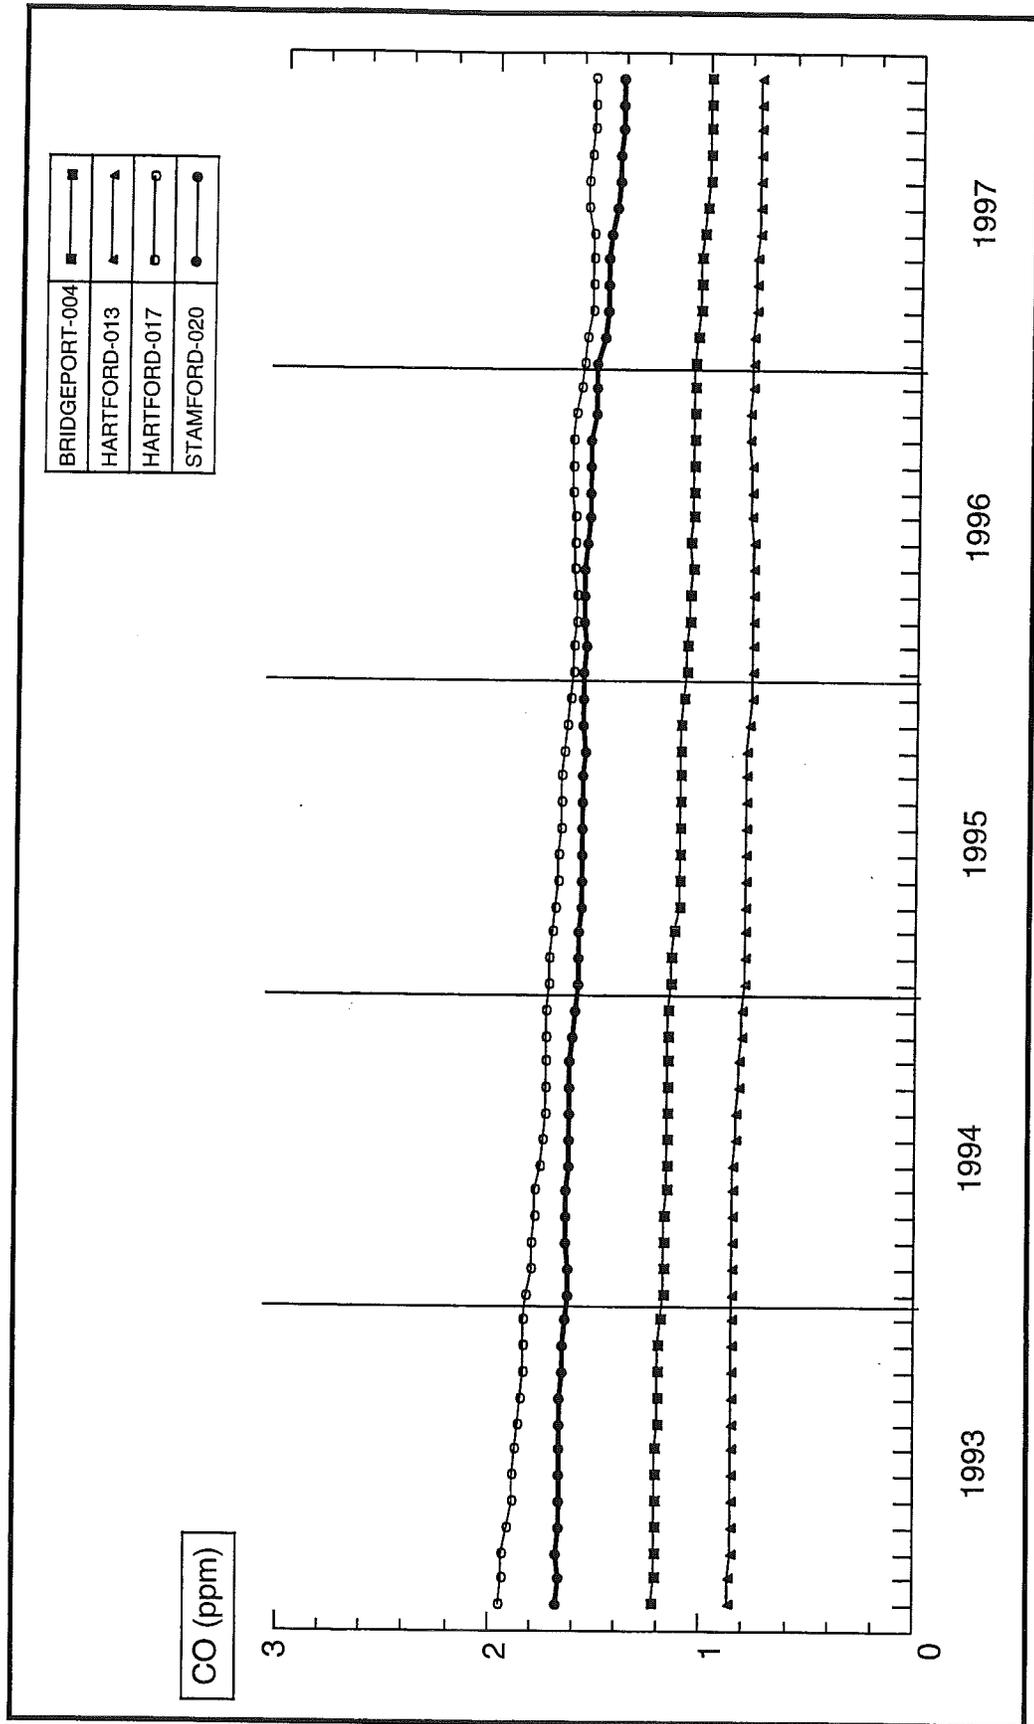

## VII. CLIMATOLOGICAL DATA

Weather is often the most significant factor influencing short-term changes in air quality. It also has an affect on long-term trends. Climatological information from the National Weather Service station at Bradley International Airport in Windsor Locks is presented in Table 7-1 for the years 1996 and 1997. Table 7-2 contains comparable information from the National Weather Service station located at Sikorsky Memorial Airport near Bridgeport. All data are compared to "mean" or "normal" values. Wind speeds<sup>1</sup> and temperatures are shown as monthly and yearly averages. Precipitation data includes both the number of days with more than 0.01 inches of precipitation and the total water equivalent. Also shown are the number of degree days<sup>2</sup> (heating requirement) and the number of days with temperatures exceeding 90°F.

Wind roses for State of Connecticut monitoring sites in Greenwich and Stafford have been developed from 1997 wind measurements taken at these sites and are shown in Figures 7-2 and 7-4, respectively. Wind roses from these stations for 1996 are shown in Figures 7-1 and 7-3, respectively.

<sup>1</sup> The mean wind speed for a month or year is calculated from all the hourly wind speeds, regardless of the wind directions.

<sup>2</sup> The degree day value for each day is arrived at by subtracting the average temperature of the day from 65°F. This number is used as a base value because it is assumed that there is no heating requirement when the outside temperature is 65°F or above.

TABLE 7-1

1996 AND 1997 CLIMATOLOGICAL DATA  
BRADLEY INTERNATIONAL AIRPORT, WINDSOR LOCKS

	AVERAGE TEMPERATURE F		NO. OF DAYS WHEN MAX. TEMP. EXCEEDED 90 F		HEATING DEGREE DAYS		PRECIPITATION IN EQUIVALENT INCHES OF WATER		NO. OF DAYS WITH MORE THAN 0.01 INCHES OF PRECIPITATION		AVERAGE WIND SPEED (MPH)							
	1996	1997	Mean <sup>a</sup>	1996	1997	Normal <sup>b</sup>	1996	1997	Mean <sup>a</sup>	1996	1997	Normal <sup>b</sup>	1996	1997	Mean <sup>c</sup>			
Jan	25.1	27.1	26.6	0	0	0.0	1227	1167	1252	3.58	3.15	3.57	16	12	10.7	10.1	9.2	9.0
Feb	27.7	34.7	27.9	0	0	0.0	1078	841	1050	2.86	1.38	3.15	13	12	10.1	10.4	8.9	9.5
Mar	34.3	36.2	37.1	0	0	0.0	944	883	853	2.45	3.60	3.72	11	15	11.2	8.7	10.1	10.1
Apr	49.6	47.2	48.2	0	0	0.3	465	526	489	6.29	2.43	3.75	13	8	10.7	10.8	9.4	9.9
May	58.3	56.1	59.2	2	0	1.1	241	274	194	2.98	3.37	3.69	13	11	11.8	7.8	10.1	8.8
Jun	69.3	68.7	67.9	1	8	3.6	19	49	20	2.39	1.90	3.53	9	7	11.5	7.7	7.0	8.1
Jul	71.2	72.3	72.4	0	5	8.0	1	3	0	6.97	3.92	3.46	11	10	9.4	7.6	7.0	7.3
Aug	71.9	70.1	71.0	2	3	4.8	2	6	6	1.67	7.33	3.92	6	17	9.6	5.6	6.1	7.0
Sep	62.9	63.2	63.5	0	0	1.3	120	104	96	7.53	0.97	3.61	15	8	9.3	6.4	6.8	7.4
Oct	51.1	50.6	52.9	0	0	*	424	445	397	5.25	1.65	3.20	13	6	8.2	7.2	6.5	7.8
Nov	38.1	38.8	42.0	0	0	0.0	802	777	693	4.14	5.87	3.82	7	13	11.2	7.3	8.0	8.5
Dec	35.8	31.4	30.5	0	0	0.0	900	1036	1101	5.69	2.18	3.70	17	9	12.3	7.7	7.2	8.6
YEAR	49.6	49.7	49.9	5	16	19.1	6223	6111	6151	51.80	37.75	43.12	144	128	126.0	8.1	8.0	8.5

\* Less than 0.05

a 1905-1997

b 1961-1990

c 1961-1997

Extracted From: Local Climatological Data Charts

U.S. Department of Commerce

National Oceanic and Atmospheric Administration

Environmental Data Service

TABLE 7-2

1996 AND 1997 CLIMATOLOGICAL DATA  
 SIKORSKY INTERNATIONAL AIRPORT, STRATFORD

	AVERAGE TEMPERATURE F		NO. OF DAYS WHEN MAX. TEMP. EXCEEDED 90 F		HEATING DEGREE DAYS		PRECIPITATION IN EQUIVALENT INCHES OF WATER		NO. OF DAYS WITH MORE THAN 0.01 INCHES OF PRECIPITATION		AVERAGE WIND SPEED (MPH)	
	1996	1997	1996	1997	1996	1997	1996	1997	1996	1997	1996	1997
	28.4	30.3	0	0	1128	1073	4.91	2.95	14	12	---	11.2
Jan	28.4	30.3	0	0	1128	1073	4.91	2.95	14	12	---	11.2
Feb	30.8	37.3	0	0	984	768	2.67	2.15	13	10	---	9.9
Mar	36.2	38.7	0	0	888	810	2.75	4.89	9	14	---	11.2
Apr	48.7	48.1	0	0	484	502	9.42	3.39	14	8	---	10.2
May	57.4	56.1	1	0	258	268	2.31	3.04	12	12	8.6	9.9
Jun	68.2	67.7	0	1	15	65	3.63	1.44	13	8	7.5	8.0
Jul	71.2	73.1	0	3	0	2	5.94	4.20	12	11	8.2	8.0
Aug	72.6	71.5	0	1	1	0	1.34	4.97	5	12	6.9	7.6
Sep	66.3	65.2	0	0	62	70	4.79	6.60	11	5	8.7	8.7
Oct	54.0	53.9	0	0	334	351	7.78	2.07	12	8	---	8.1
Nov	40.7	42.2	0	0	721	678	3.35	3.87	8	14	9.1	9.7
Dec	39.1	35.5	0	0	794	908	6.47	3.23	19	11	9.8	9.0
YEAR	51.1	51.6	1	5	5669	5495	55.36	36.80	142	125	---	9.3

\* Less than 0.05

a 1903-1997

b 1961-1990

c 1904-1997

d 1981-1997

Extracted From: Local Climatological Data Charts


U.S. Department of Commerce

National Oceanic and Atmospheric Administration

Environmental Data Service


# FIGURE 7-1

## ANNUAL WIND ROSE FOR 1996 GREENWICH POINT PARK GREENWICH, CONNECTICUT

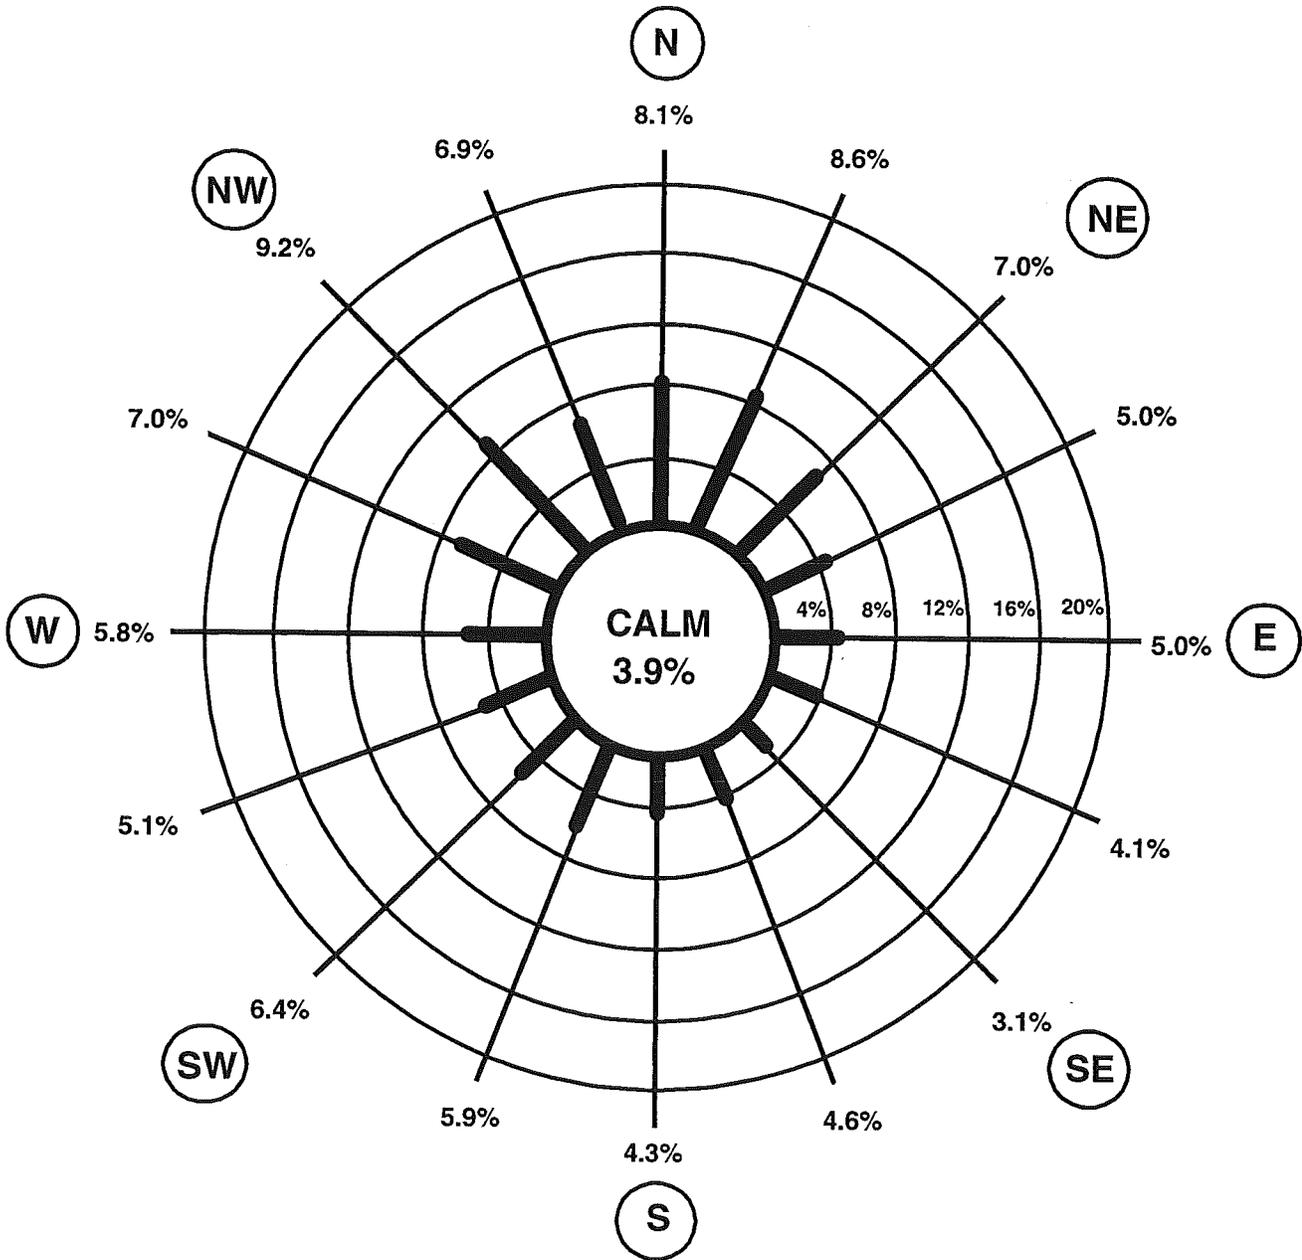


**FIGURE 7-2**

**ANNUAL WIND ROSE FOR 1997**  
**GREENWICH POINT PARK**  
**GREENWICH, CONNECTICUT**

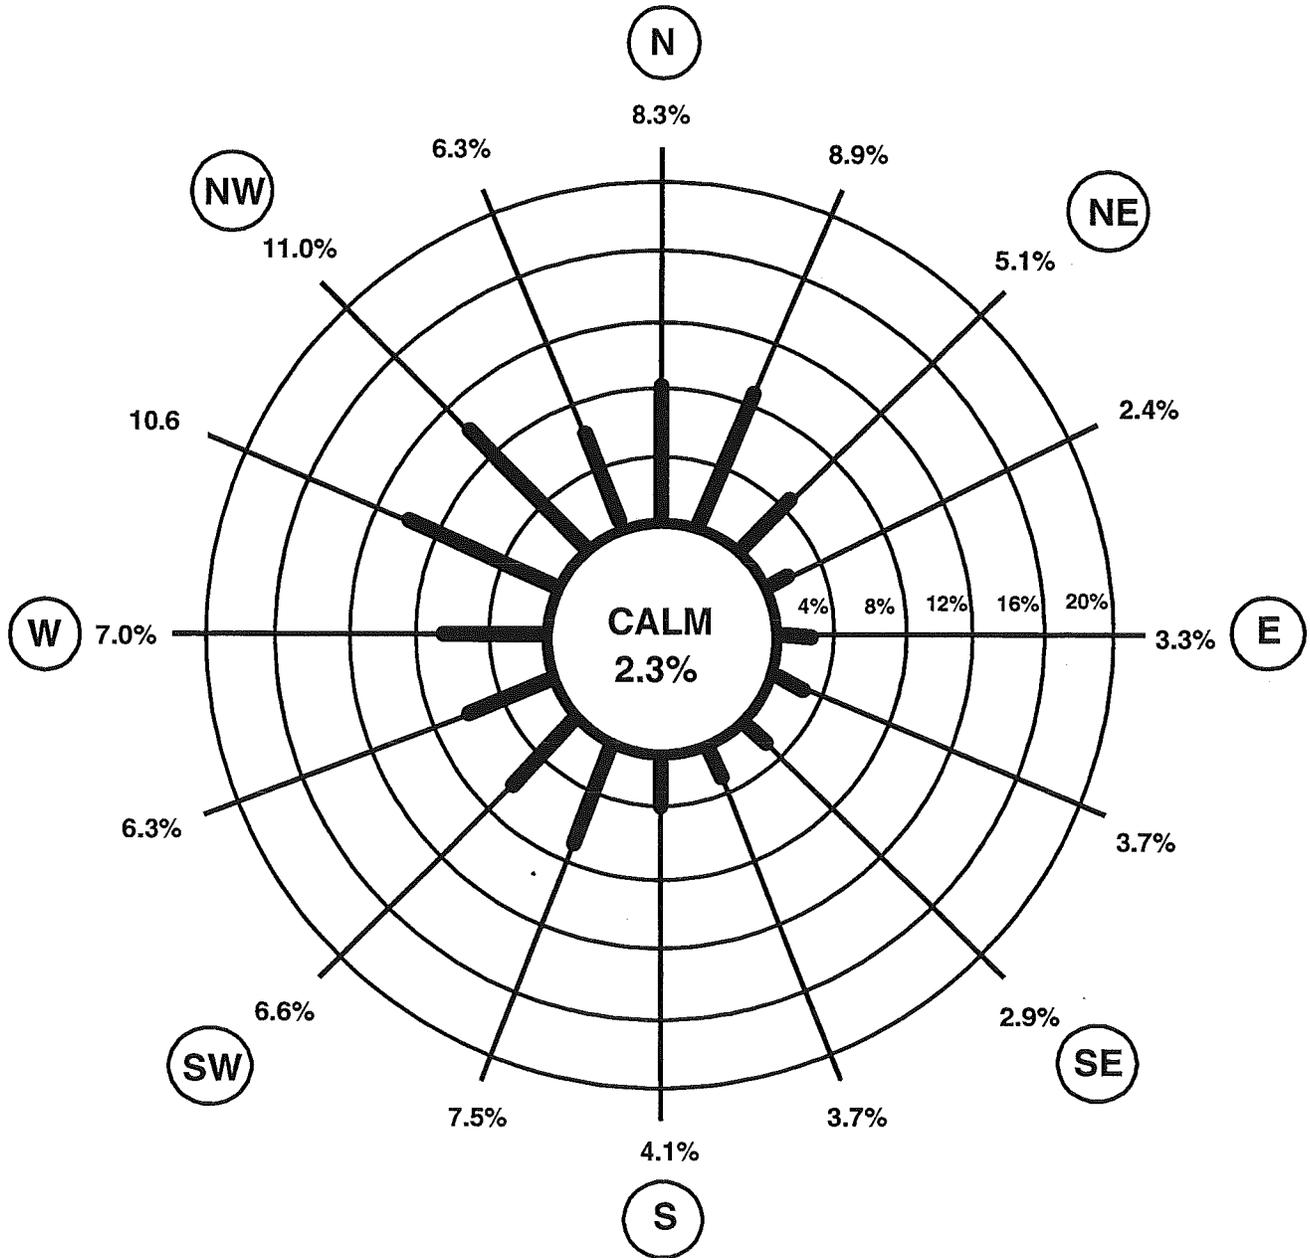


**FIGURE 7-3**

**ANNUAL WIND ROSE FOR 1996**  
**SHENIPSIT STATE FOREST**  
**STAFFORD, CONNECTICUT**

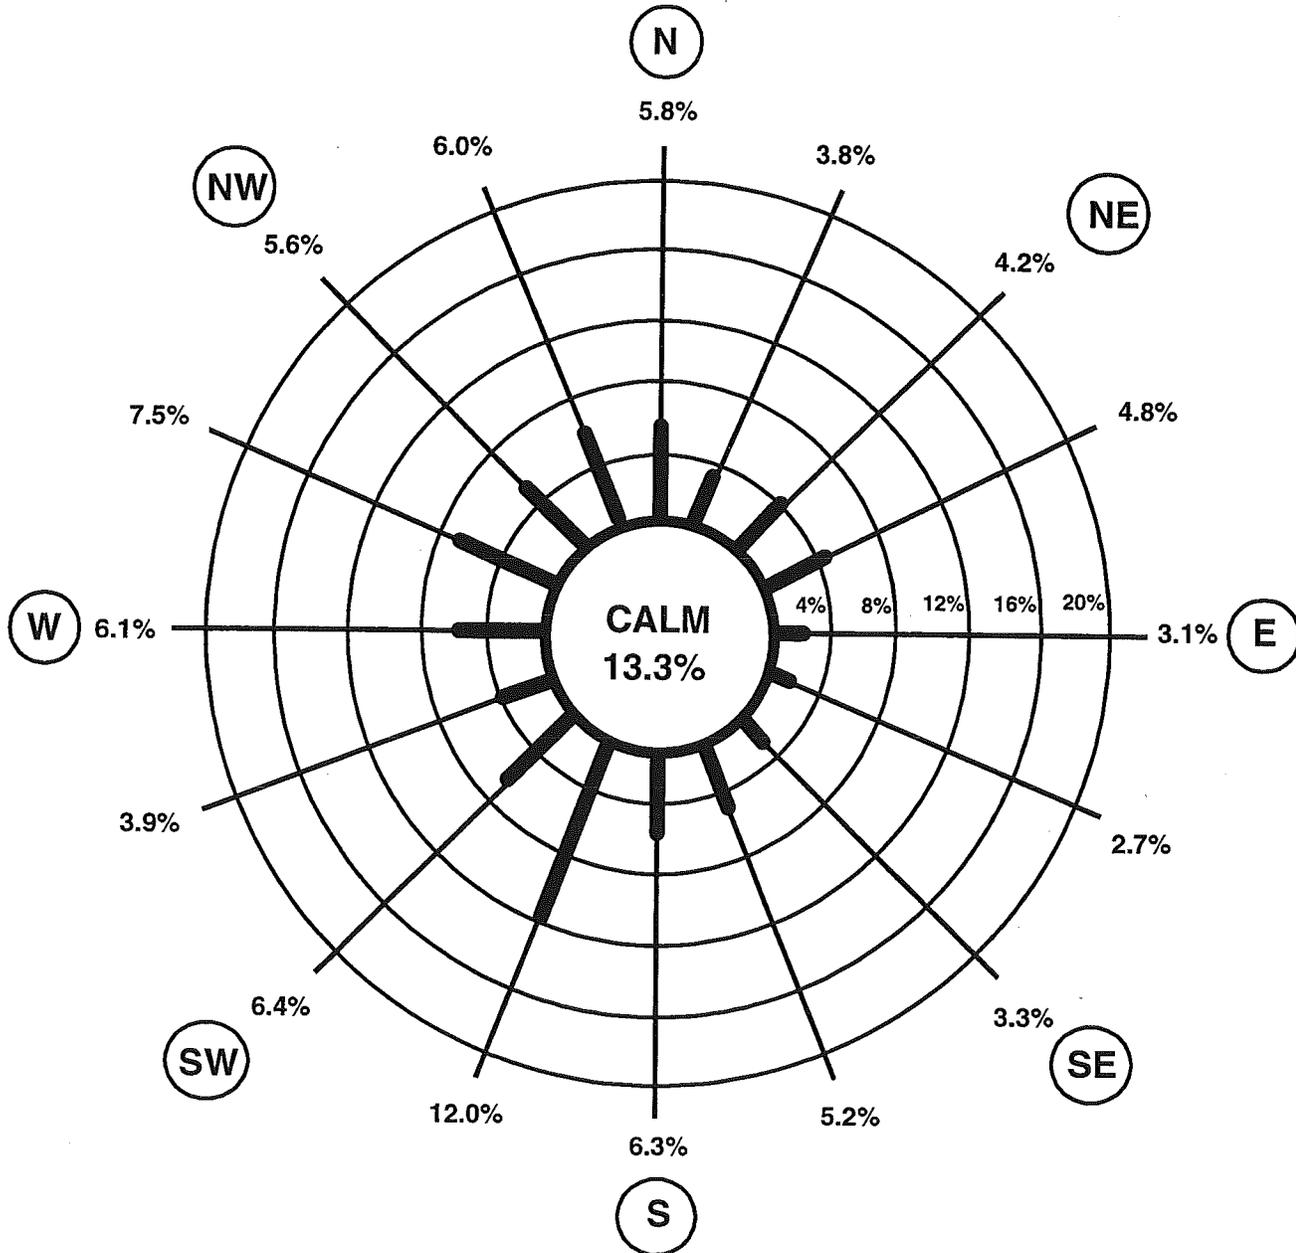

**FIGURE 7-4**

**ANNUAL WIND ROSE FOR 1997**  
**SHENIPSIT STATE FOREST**  
**STAFFORD, CONNECTICUT**

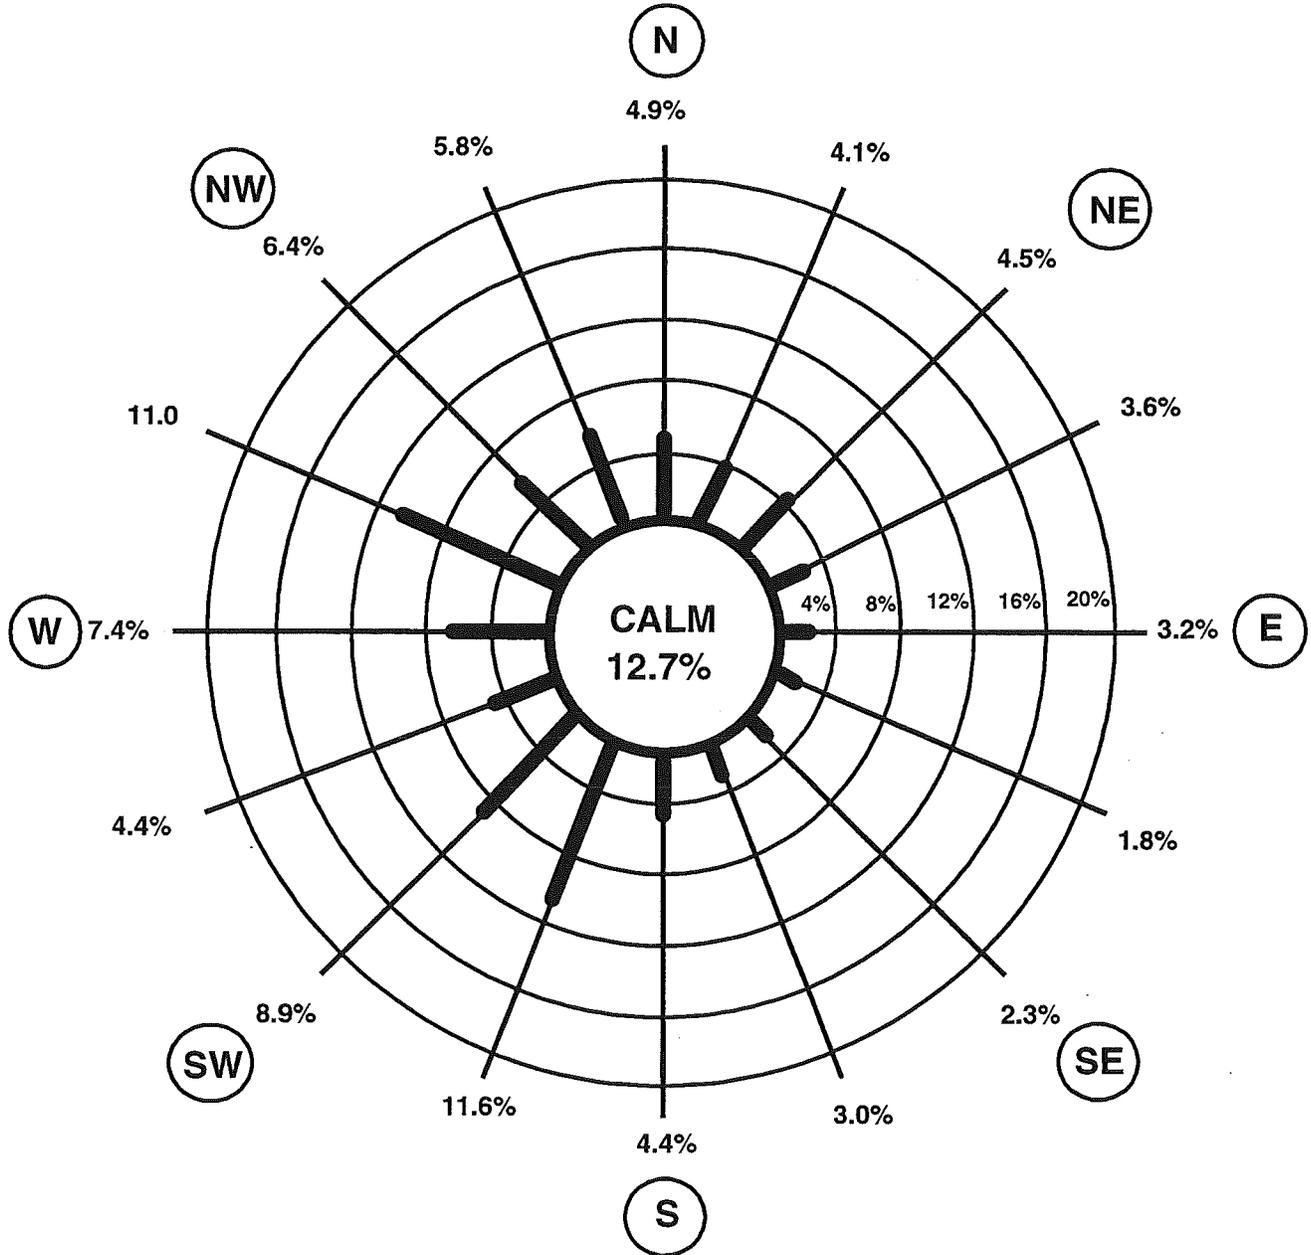

## VIII. ATTAINMENT AND NON-ATTAINMENT OF THE NAAQS IN CONNECTICUT

The State of Connecticut can be broadly designated as either attainment or non-attainment with respect to the National Ambient Air Quality Standards (NAAQS) for the following pollutants: particulate matter no greater than 10 micrometers in diameter (PM<sub>10</sub>); sulfur dioxide (SO<sub>2</sub>); ozone (O<sub>3</sub>); nitrogen dioxide (NO<sub>2</sub>); carbon monoxide (CO) ; and lead (Pb). The 1997 designations are:

<u>Attainment</u>	<u>Non-attainment</u>
NO <sub>2</sub>	CO
Pb	Ozone
SO <sub>2</sub>	PM <sub>10</sub>

When the State has been designated as attainment for a pollutant, all regions of the State are in compliance with all the standards (i.e., short term and long term; primary and secondary) for the particular pollutant. This is the case for NO<sub>2</sub>, Pb and SO<sub>2</sub>.

When the State has been designated as non-attainment for a pollutant, one or more of the standards for the pollutant have been violated in one or more regions of the State. The non-attainment designation that is subsequently applied to a region can reflect the "degree" of non-attainment depending upon a number of factors: the air pollution history in the region; previous designation of the region as either attainment or non-attainment; lack of air pollutant monitoring in the region; inferences made based on pollutant monitoring done in adjacent or similar regions, *et al.* For example, the whole state is designated as non-attainment for ozone, but the degree of non-attainment varies between regions (see Figure 8-1). The region comprising Fairfield County (less Shelton), New Milford and Bridgewater is designated as "severe non-attainment" for ozone, while the rest of the State is designated as "serious non-attainment." The difference in the two designations is explained by higher ozone concentrations in excess of the 1-hour ozone standard in the Fairfield County portion of the NY-NJ-CT non-attainment area.

For CO, there is a mix of both attainment and non-attainment regions (see Figure 8-2). The region comprising Fairfield County (less Shelton), New Milford and Bridgewater is designated as "moderate non-attainment" primarily due to exceedances of the 8-hour CO standard in the New York / New Jersey portion of the region (not shown). The region comprising New Haven County, Bethlehem, Watertown, Woodbury, Thomaston and Shelton is designated as "unclassified non-attainment." This designation reflects the fact that although no exceedances of the CO standards have been recorded there in the recent past, the region was previously part of the New Haven -- Hartford -- Springfield Air Quality Control Region which was designated as non-attainment due to exceedances of the 8-hour CO standard recorded in the city of Hartford. The region comprising Hartford County (less Hartland), Tolland County, Middlesex County and Plymouth was redesignated as "attainment" by EPA on January 2, 1996 . This action was based on a technical analysis prepared by the Bureau of Air Management which demonstrates that the area has and will continue to maintain ambient CO concentrations levels within the air quality health standards. The two remaining regions of the State -- the eastern section and the northwest corner -- are designated as "unclassified attainment." This designation reflects the fact that although no CO monitoring has been done in these regions, their status as attainment areas can be inferred from population and traffic density data.

For PM<sub>10</sub>, the entire State is designated as attainment, except for the city of New Haven (see Figure 8-3).

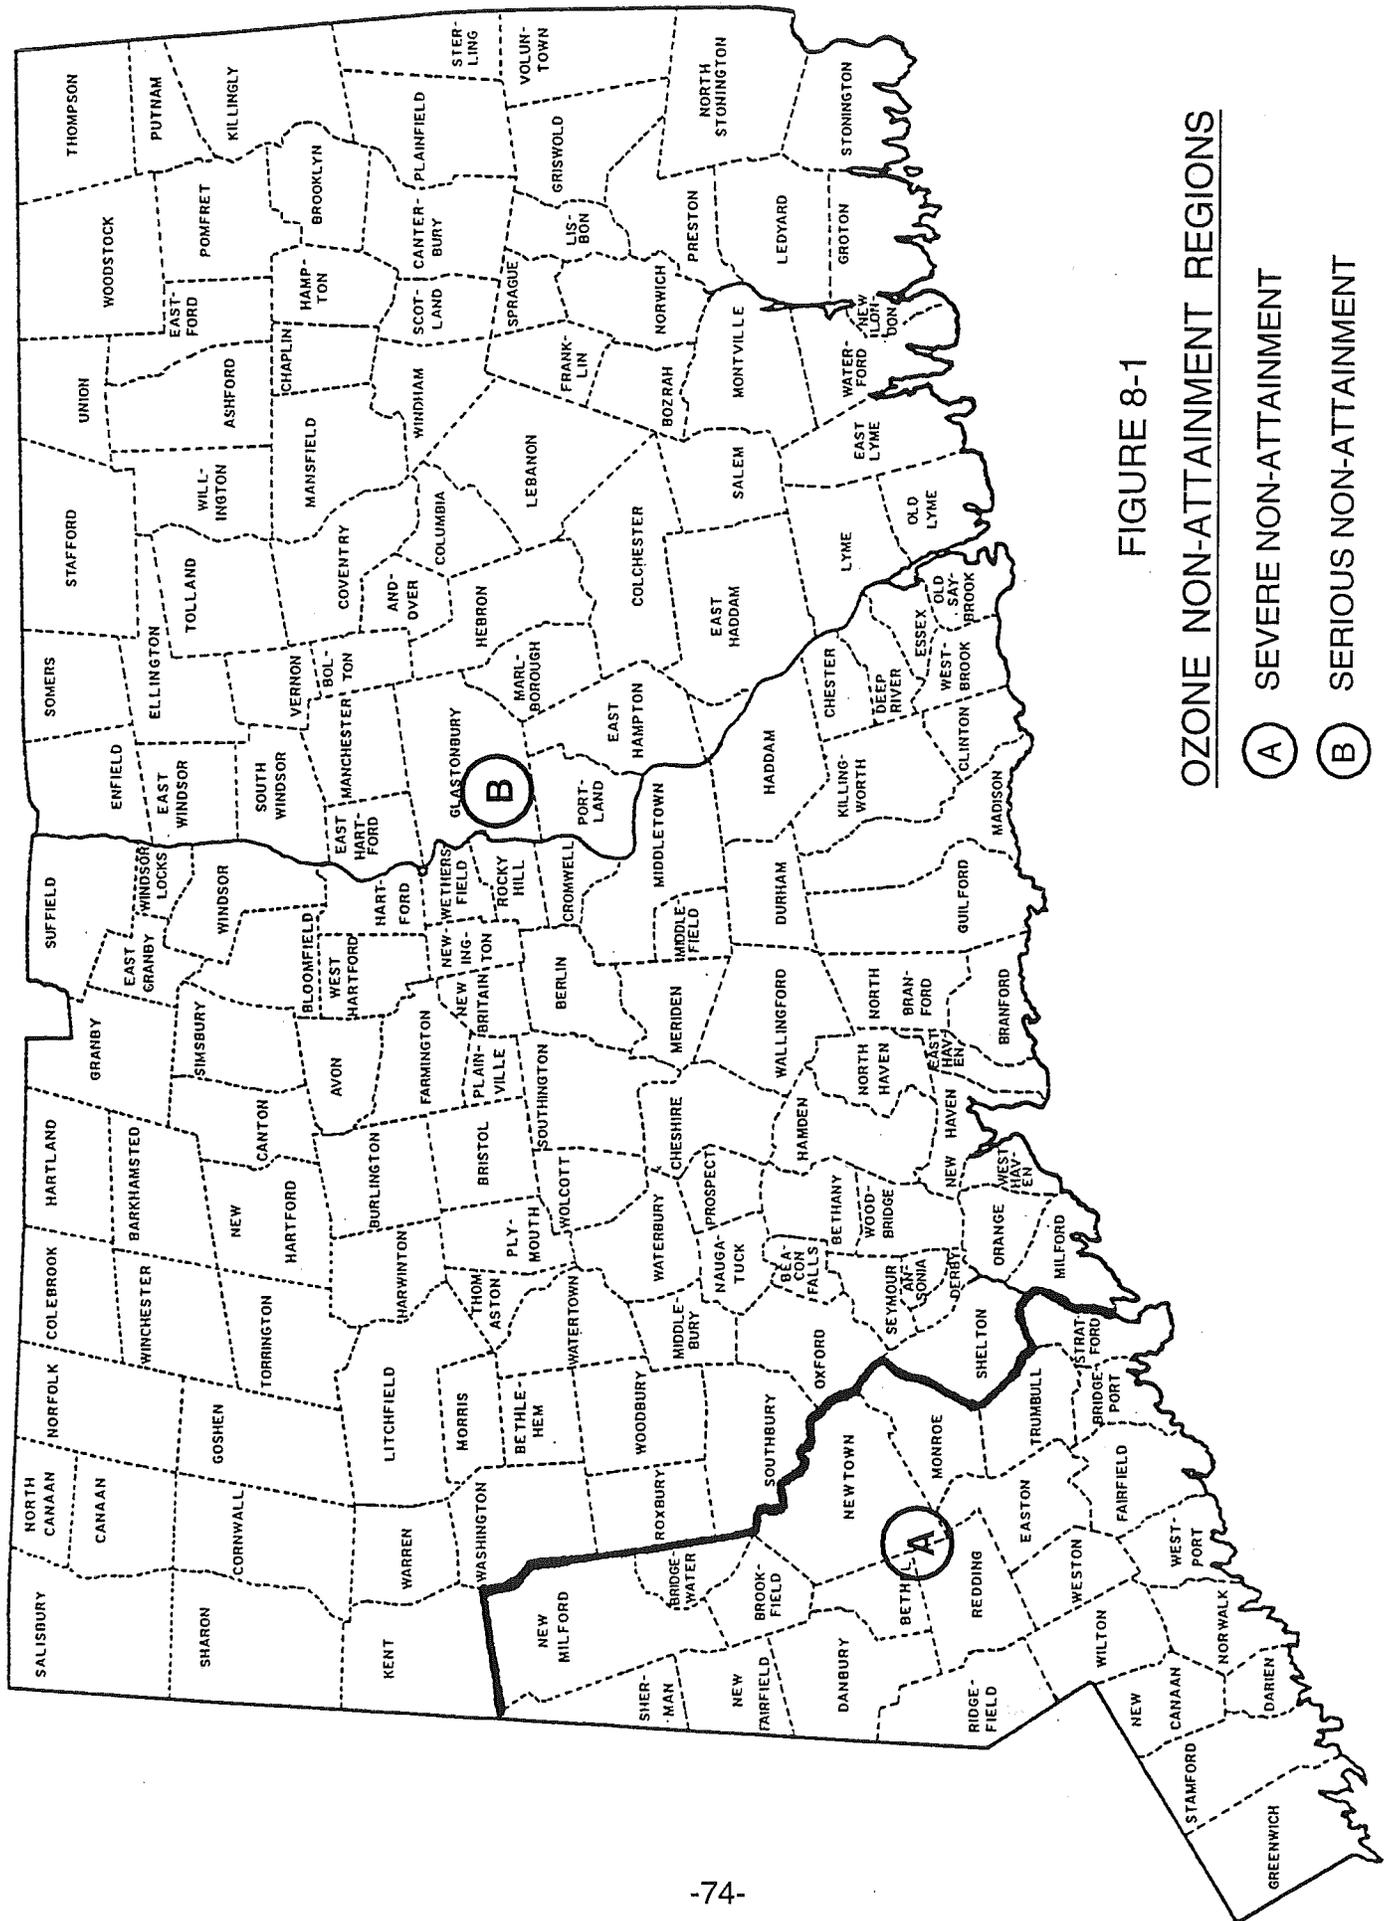


FIGURE 8-1  
OZONE NON-ATTAINMENT REGIONS

- (A) SEVERE NON-ATTAINMENT
- (B) SERIOUS NON-ATTAINMENT

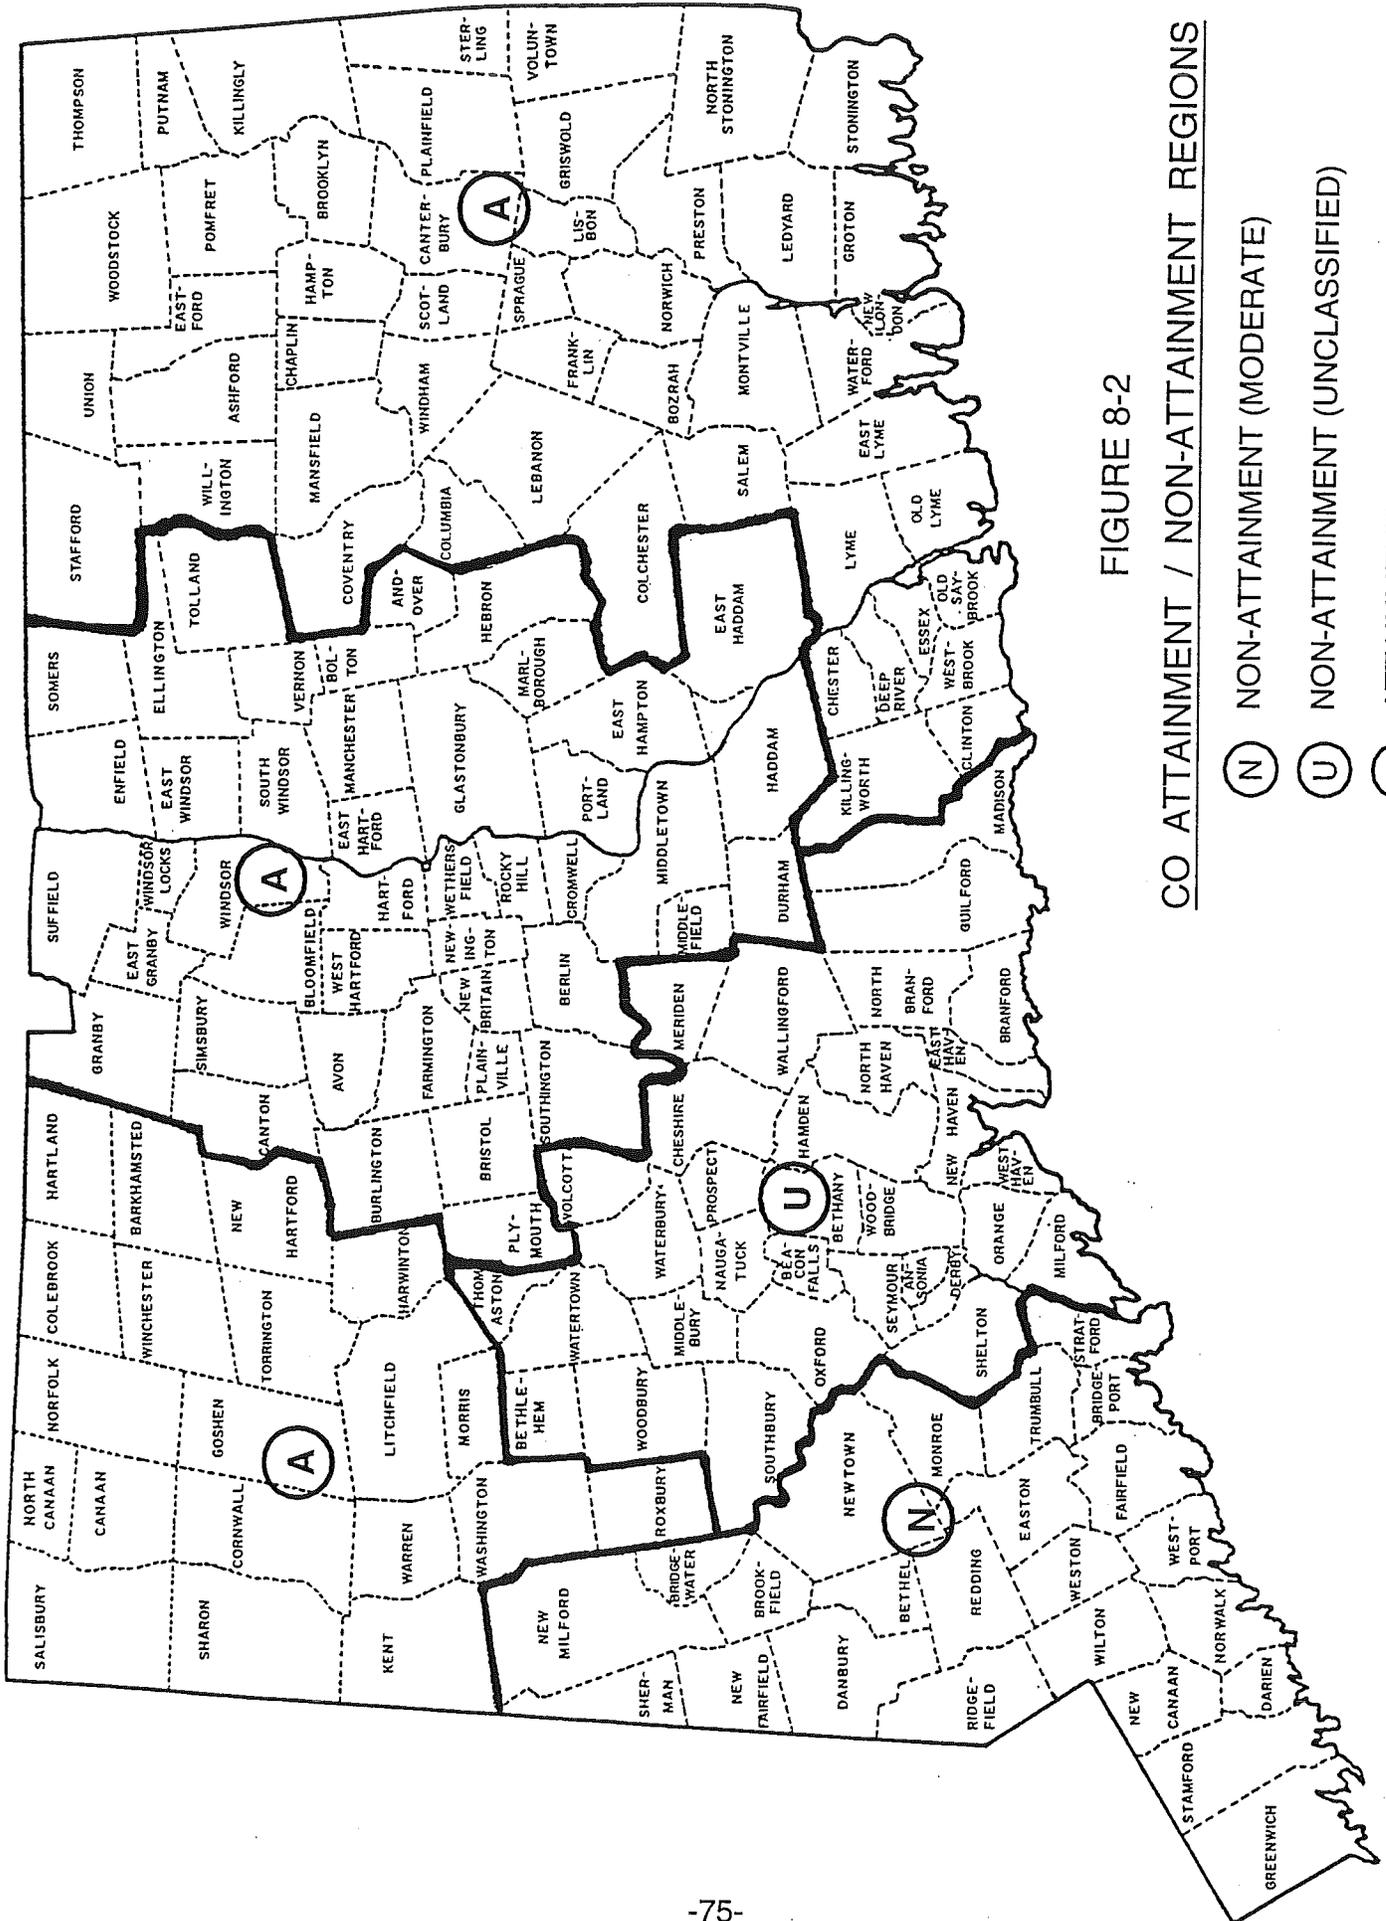


FIGURE 8-2

CO ATTAINMENT / NON-ATTAINMENT REGIONS

- (N) NON-ATTAINMENT (MODERATE)
- (U) NON-ATTAINMENT (UNCLASSIFIED)
- (A) ATTAINMENT



## IX. CONNECTICUT SLAMS, NAMS AND PAMS NETWORKS

On May 10, 1979, the U.S. Environmental Protection Agency made public its final rulemaking for ambient air monitoring and data reporting requirements in the "Federal Register" (Vol. 44, No. 92). These regulations, which can also be found in Title 40 of the Code of Federal Regulations (CFR), Part 58, Appendix A through G, are meant to ensure the acceptability of air measurement data, the comparability of data from all monitoring stations nationwide, the cost-effectiveness of monitoring networks, and timely data submission for assessment purposes. The regulations address a number of key areas including quality assurance, monitoring methodologies, network design, probe siting and data reporting. Detailed requirements and specific criteria are provided which form the framework for ambient air quality monitoring. These regulations apply to all parties conducting ambient air quality monitoring for the purpose of supporting or complying with environmental regulations. In particular, state/local control agencies and industrial/private concerns involved in air monitoring are directly influenced by specific requirements, compliance dates and recommended guidelines.

### QUALITY ASSURANCE

The regulations specify the minimum quality assurance requirements for State and Local Air Monitoring Stations (SLAMS) networks and for National Air Monitoring Stations (NAMS) networks and Photochemical Assessment Monitoring Stations (PAMS) networks, which are both subsets of SLAMS. Two distinct and equally important functions make up the quality assurance program: assessment of the quality of monitoring data by statistically calculating their precision and accuracy, and control of the quality of the data by implementation of quality control policies, procedures and corrective actions, and by overseeing their proper implementation. (See Part D of Section I, Quality Assurance).

The data assessment requirements entail the determination of precision and accuracy for both continuous and manual methods. A one-point precision check must be carried out at least once every other week on each automated analyzer used to measure SO<sub>2</sub>, NO<sub>2</sub>, CO, O<sub>3</sub> and VOC. Standards from which the precision check test data are derived must meet specifications detailed in the regulations. For manual methods, precision checks are to be accomplished by operating colocated duplicate samplers. In 1997, Connecticut maintained three colocated PM<sub>10</sub> samplers (Hartford 015, New Haven 123 and Waterbury 123).

Accuracy determinations for automated analyzers are accomplished for SO<sub>2</sub>, NO<sub>2</sub>, CO, and O<sub>3</sub> by audits performed by an independent auditor utilizing equipment and gases which are disassociated from the normal network operations; and for VOC by audits performed by site operators utilizing blind standards. Accuracy determinations are accomplished via traceable standard flow devices for hi-vols and also spiked strip analyses for lead. During each calendar quarter, at least 25% of SLAMS network for each pollutant must be audited.

All precision and accuracy results are statistics derived through calculation methods specified by the regulations, with the data and results reported quarterly. The NAMS and PAMS networks are actually part of the SLAMS network; so the SLAMS accuracy determinations also apply to both the NAMS and PAMS networks.

The distinguishing characteristics of NAMS are: 1) the sites are located in high population, high pollution areas (i.e., urban areas); 2) only continuous instruments are used to monitor gaseous pollutants; 3) the regulations specify a minimum number and locations for them; and 4) the data are required to be reported quarterly to EPA. PAMS share most of these characteristics, except that the

monitoring sites are located relative to O<sub>3</sub> precursor source areas and predominant wind directions associated with high O<sub>3</sub> events.

In order to control the quality of data, the monitoring program has operational procedures for each of the following activities:

1. Selection of methods, analyzers, and samplers,
2. Site selection and probe siting,
3. Equipment purchase, check-out and installation,
4. Instrument calibration,
5. Control checks and their frequency,
6. Control limits for control checks, and corrective actions when such limits are exceeded,
7. Preventive and remedial maintenance,
8. Documentation of quality control information, and
9. Data recording, reduction, validation and reporting.

### **MONITORING METHODOLOGIES**

Except as otherwise stated within the regulations, the monitoring methods used must be "reference" or "equivalent," as designated by the EPA. Table 9-1 lists methods used in Connecticut's network in 1997 which were on the EPA-approved list as of April 30, 1996. Additional updates to these approved methods are provided through the "Federal Register."

### **NETWORK DESIGN**

The regulations also describe monitoring objectives and general criteria to be applied in establishing the SLAMS, NAMS and PAMS networks and for choosing general locations for new monitors. Criteria are also presented for determining the location and number of monitors. These criteria have served as the framework for all State Implementation Plan (SIP) monitoring networks since January 1, 1984 for SLAMS and NAMS, and since February 12, 1993 for PAMS .

The SLAMS and NAMS networks are designed to meet four basic monitoring objectives which are pollutant specific: (1) to determine the highest pollutant concentration in the area; (2) to determine representative concentrations in areas of high population density; (3) to determine the ambient impact of significant sources or source categories; and (4) to determine general background concentration levels. PAMS design criteria are site specific and are based on the selection of an array of site locations. Specific monitoring objectives are associated with each location: (1) to characterize upwind background and transported O<sub>3</sub> and its precursor concentrations; (2) to monitor the magnitude and type of precursor emissions at the expected impact area; (3) to monitor maximum O<sub>3</sub> concentrations occurring downwind from the area of maximum precursor emissions; (4) to characterize the extreme downwind transported O<sub>3</sub> and its precursor concentrations. Proper siting of a monitor requires precise specification of the monitoring objectives, which includes a spatial scale of representativeness. The spatial scales of representativeness are specified in the regulations for all pollutants and monitoring objectives. The 1997 SLAMS, NAMS and PAMS networks in Connecticut are presented and described in Table 9-2.

### **PROBE SITING**

Location and exposure of monitoring probes are described in Title 40 of the Code of Federal Regulations, Part 58, Appendix E. The probe siting criteria promulgated in the regulations are specific. They are also sufficiently comprehensive to define the requirements for ensuring the uniform collection of compatible and comparable air quality data.

These criteria are detailed by pollutant and include vertical and horizontal probe placement, spacing from obstructions and trees, spacing from roadways, probe material and sample residence time, and various other considerations. A summary of the probe siting criteria is presented in Table 9-3. The siting criteria generally apply to all spatial scales, except where noted. The most notable exception is spacing from roadways, which is dependent on traffic volume.

For the chemically reactive gases  $\text{SO}_2$ ,  $\text{NO}_2$ , and  $\text{O}_3$ , the regulations specify borosilicate glass, FEP teflon or their equivalent as the only acceptable sample train materials. For VOC sampling at those SLAMS designated as PAMS, the regulations specify borosilicate glass, stainless steel, or its equivalent. Additionally, in order to minimize the effects of particulate deposition on probe walls, sample trains for reactive gases must have residence times of less than 20 seconds.

# TABLE 9-1

## U. S. EPA-APPROVED MONITORING METHODS USED IN CONNECTICUT IN 1997

<u>Pollutant</u>	<u>Monitoring Methods</u>		
	Reference Manual	Reference Automated	Equivalent Automated
PM <sub>10</sub>	High Volume Method [Wedding & Associates Critical Flow Hi-vol]		Tapered Element Oscillating Microbalance [Rupprecht & Patashnick TEOM Series 1400]
SO <sub>2</sub>			Pulsed Fluorescence [Thermo Electron 43 (0.5) & Thermo Electron 43A (0.5)]
O <sub>3</sub>			UV Absorption [Monitor Labs 8810 (0.5)]
CO		Non-dispersive Infrared [Thermo Electron 48 (50)]	
NO <sub>2</sub>		Chemiluminescence [Thermo Electron 42 (1.0)]	

( ) = Approved range in ppm

# TABLE 9-2

## 1997 SLAMS, NAMS AND PAMS SITES IN CONNECTICUT

<u>Town</u>	<u>Urban Area</u>	<u>Site</u>	SLAMS, NAMS or PAMS	<u>Sampling Method</u>	<u>Analytic Method</u>	<u>Operating Schedule</u>	<u>Monitoring Objective</u>	<u>Spatial Scale of Representativeness</u>
<b><u>PARTICULATE MATTER (PM<sub>10</sub>)</u></b>								
Bridgeport	Bridgeport	010	N	Hi-Vol	Gravimetric	6th day	Population	Neighborhood
Burlington	NONE	001	S	Hi-Vol	Gravimetric	6th day	Background	Regional
Danbury	Danbury	123	S	Hi-Vol	Gravimetric	6th day	Population	Neighborhood
Darien	Stamford	001	N	Hi-Vol	Gravimetric	6th day	High Concentration	Micro
E. Hartford	Hartford	004	S	Hi-Vol	Gravimetric	6th day	High Concentration	Neighborhood
Enfield	MA-CT*	005	S	Hi-Vol	Gravimetric	6th day	Population	Regional
Greenwich	Stamford	017	S	Hi-Vol	Gravimetric	6th day	Population	Neighborhood
Hartford	Hartford	013	N	Hi-Vol	Gravimetric	6th day	Population	Neighborhood
Hartford	Hartford	015	N	Hi-Vol	Gravimetric	6th day	Population	Neighborhood
Middletown	Hartford	003	S	Hi-Vol	Gravimetric	6th day	High Concentration	Micro
New Haven	New Haven	018	N	Hi-Vol	Gravimetric	6th day	High Concentration	Neighborhood
New Haven	New Haven	020	N	Hi-Vol	Gravimetric	6th day	High Concentration	Middle
New Haven	New Haven	123	S	Hi-Vol	Gravimetric	6th day	High Concentration	Middle
New London	New London/ Norwich	004	N	Hi-Vol	Gravimetric	6th day	Population	Neighborhood
Norwalk	Norwalk	014	N	Hi-Vol	Gravimetric	6th day	High Concentration	Micro
Norwich	New London/ Norwich	002	S	Hi-Vol	Gravimetric	6th day	Population	Neighborhood
Torrington	NONE	001	S	Hi-Vol	Gravimetric	6th day	Population	Neighborhood
Voluntown	NONE	001	S	Hi-Vol	Gravimetric	6th day	Background	Regional
Wallingford	New Haven	006	S	Hi-Vol	Gravimetric	6th day	Population	Neighborhood
Waterbury	Waterbury	123	N	Hi-Vol	Gravimetric	6th day	High Concentration	Middle
Willimantic	NONE	002	S	Hi-Vol	Gravimetric	6th day	High Concentration	Neighborhood

\* Includes Springfield, Chicopee, Holyoke in MA; East Windsor, Enfield, Suffield, Windsor Locks in CT.

**TABLE 9-2, CONTINUED**  
**1997 SLAMS, NAMS AND PAMS SITES IN CONNECTICUT**

Town	Urban Area	Site	SLAMS, NAMS or PAMS	Sampling & Analytic Method	Operating Schedule	Monitoring Objective	Spatial Scale of Representativeness
<b><u>CARBON MONOXIDE</u></b>							
Bridgeport	Bridgeport	004	S	NDIR	Continuous	High Concentration	Micro
Hartford	Hartford	013	N	NDIR	Continuous	Population	Neighborhood
Hartford	Hartford	017	N	NDIR	Continuous	High Concentration	Micro
New Haven	New Haven	025	S	NDIR	Continuous	High Concentration	Micro
Stamford	Stamford	020	S	NDIR	Continuous	High Concentration	Micro
<b><u>SULFUR DIOXIDE</u></b>							
Bridgeport	Bridgeport	012	S	Pulsed Fluorescence	Continuous	High Concentration	Neighborhood
Danbury	Danbury	123	S	Pulsed Fluorescence	Continuous	Population	Neighborhood
E. Hartford	Hartford	006	N	Pulsed Fluorescence	Continuous	High Concentration	Neighborhood
East Haven	New Haven	003	S	Pulsed Fluorescence	Continuous	Population	Neighborhood
Enfield	MA - CT*	005	S	Pulsed Fluorescence	Continuous	Background	Regional
Greenwich	Stamford	017	S	Pulsed Fluorescence	Continuous	Background	Urban
Groton	New London/ Norwich	007	S	Pulsed Fluorescence	Continuous	Population	Neighborhood
Hartford	Hartford	018	N	Pulsed Fluorescence	Continuous	Population	Neighborhood
Mansfield	NONE	003	S	Pulsed Fluorescence	Continuous	Population	Neighborhood
New Haven	New Haven	123	N	Pulsed Fluorescence	Continuous	High Concentration	Neighborhood
Stamford	Stamford	124	S	Pulsed Fluorescence	Continuous	High Concentration	Neighborhood
Waterbury	Waterbury	123	S	Pulsed Fluorescence	Continuous	Population	Neighborhood

\* Includes Springfield, Chicopee, Holyoke in MA; East Windsor, Enfield, Suffield, Windsor Locks in CT.

**TABLE 9-2, CONTINUED**  
**1997 SLAMS, NAMS AND PAMS SITES IN CONNECTICUT**

<u>Town</u>	<u>Urban Area</u>	<u>Site</u>	<u>SLAMS, NAMS or PAMS</u>	<u>Sampling &amp; Analytic Method</u>	<u>Operating Schedule</u>	<u>Monitoring Objective</u>	<u>Spatial Scale of Representativeness</u>
<b><u>NITROGEN OXIDES</u></b>							
Bridgeport	Bridgeport	013	S	Chemiluminescent	Continuous	High Concentration	Neighborhood
E. Hartford	Hartford	003	S/P	Chemiluminescent	Continuous	High Concentration	Neighborhood
New Haven	New Haven	123	S	Chemiluminescent	Continuous	High Concentration	Neighborhood
Stafford	NONE	001	P	Chemiluminescent	Continuous	Maximum Ozone	Regional
Westport	Norwalk	003	P	Chemiluminescent	Continuous	Upwind Concentration	Regional
<b><u>OZONE</u></b>							
Bridgeport	Bridgeport	013	N	Chemiluminescent	Continuous	Population	Neighborhood
Danbury	Danbury	123	S	Chemiluminescent	Continuous	High Concentration	Urban
E. Hartford	Hartford	003	N	Chemiluminescent	Continuous	Population	Neighborhood
Greenwich	Stamford	017	S	Chemiluminescent	Continuous	High Concentration	Urban
Groton	New London/ Norwich	008	S	Chemiluminescent	Continuous	High Concentration	Urban
Madison	NONE	002	S	Chemiluminescent	Continuous	High Concentration	Urban
Middletown	Hartford	007	N	Chemiluminescent	Continuous	High Concentration	Urban
New Haven	New Haven	123	N	Chemiluminescent	Continuous	Population	Neighborhood
Stafford	NONE	001	N/P	Chemiluminescent	Continuous	High Conc. /Max. Ozone	Urban / Regional
Stratford	Bridgeport	007	N	Chemiluminescent	Continuous	High Concentration	Urban
Torrington	NONE	006	S	Chemiluminescent	Continuous	High Concentration	Urban
Westport	Norwalk	003	P	Chemiluminescent	Continuous	Upwind Concentration	Regional
<b><u>VOC</u></b>							
E. Hartford	Hartford	003	P	Chemiluminescent	Continuous	Max. Concentration	Neighborhood
Stafford	NONE	001	P	Chemiluminescent	Continuous	Maximum Ozone	Regional
Westport	Norwalk	003	P	Chemiluminescent	Continuous	Upwind Concentration	Regional

# TABLE 9-3

## SUMMARY OF PROBE SITING CRITERIA

Pollutant	Spatial Scale	Distance from Supporting Structure (meters)		Height Above Ground (meters)	Other Spacing Criteria
		Vertical	Horizontal <sup>a</sup>		
PM <sub>10</sub>	Micro		>2	2 - 7	<ol style="list-style-type: none"> <li>1. The sampler should be &gt; 20 meters from the dripline and must be 10 meters from the dripline when any tree acts as an obstruction.</li> <li>2. The distance from the sampler to an obstacle, such as a building, must be at least twice the height the obstacle protrudes above the sampler, except for street canyon sites.<sup>b</sup></li> <li>3. There must be unrestricted air flow 270 degrees around the sampler, except for street canyon sites.</li> <li>4. No furnace or incineration flues should be nearby.<sup>c</sup></li> <li>5. The spacing from roads varies with traffic<sup>d</sup>, except for street canyon sites which must be from 2 to 10 meters from the edge of the nearest traffic lane.</li> </ol>
	Middle, neighborhood, urban and regional		>2	2 - 15	<ol style="list-style-type: none"> <li>1. The sampler should be &gt; 20 meters from the dripline and must be 10 meters from the dripline when any tree acts as an obstruction.</li> <li>2. The distance from the sampler to an obstacle, such as a building, must be at least twice the height the obstacle protrudes above the sampler.<sup>b</sup></li> <li>3. There must be unrestricted air flow 270 degrees around the sampler.</li> <li>4. No furnace or incineration flues should be nearby.<sup>c</sup></li> <li>5. The spacing from roads varies with traffic.<sup>d</sup></li> </ol>

# TABLE 9-3, CONTINUED

## SUMMARY OF PROBE SITING CRITERIA

Pollutant	Spatial Scale	Distance from Supporting Structure (meters)		Height Above Ground (meters)	Other Spacing Criteria
		Vertical	Horizontal <sup>a</sup>		
SO <sub>2</sub>	All	3 - 15	>1	>1	<ol style="list-style-type: none"> <li>1. The probe should be &gt; 20 meters from the dripline and must be 10 from the dripline when a tree acts as an obstruction.</li> <li>2. The distance from the inlet probe to an obstacle, such as a building, must be at least twice the height the obstacle protrudes above the inlet probe.<sup>b</sup></li> <li>3. There must be unrestricted air flow 270 degrees around the inlet probe, or 180 degrees if the probe is on the side of a building.</li> <li>4. No furnace or incineration flues should be nearby.<sup>c</sup></li> </ol>
O <sub>3</sub> or VOC	All	>1	>1	3 - 15	<ol style="list-style-type: none"> <li>1. The probe should be &gt; 20 meters from the dripline and must be 10 from the dripline when a tree acts as an obstruction.</li> <li>2. The distance from the inlet probe to an obstacle, such as a building, must be at least twice the height the obstacle protrudes above the inlet probe.</li> <li>3. There must be unrestricted air flow in an arc of at least 270 degrees around the inlet probe, or 180 degrees if the probe is on the side of a building.<sup>e</sup></li> <li>4. The spacing from roads varies with traffic.<sup>d</sup></li> </ol>

# TABLE 9-3, CONTINUED

## SUMMARY OF PROBE SITING CRITERIA

Pollutant	Spatial Scale	Distance from Supporting Structure (meters)		Height Above Ground (meters)	Other Spacing Criteria
		Vertical	Horizontal <sup>a</sup>		
CO	Micro	2.5 - 3.5	>1	>1	<ol style="list-style-type: none"> <li>1. The probe must be &gt;10 meters from the street intersection and should be at a midblock location.</li> <li>2. The probe must be 2 to 10 meters from the edge of the nearest traffic lane.</li> <li>3. There must be unrestricted airflow 180 degrees around the inlet probe.</li> </ol>
	Middle neighborhood	3 - 15	>1	>1	<ol style="list-style-type: none"> <li>1. There must be unrestricted airflow 270 degrees around the inlet probe, or 180 degrees if the probe is on the side of a building.</li> <li>2. The spacing from roads varies with traffic.<sup>d</sup></li> </ol>
NO <sub>2</sub>	All	3 - 15	>1	>1 <sup>f</sup>	<ol style="list-style-type: none"> <li>1. The probe should be &gt; 20 meters from the dripline and must be 10 from the dripline when a tree acts as an obstruction.</li> <li>2. The distance from the inlet probe to an obstacle, such as a building, must be at least twice the height the obstacle protrudes above the inlet probe.<sup>b</sup></li> <li>3. There must be unrestricted air flow in an arc of at least 270 degrees around the inlet probe, or 180 degrees if the probe is on the side of a building.<sup>e</sup></li> <li>4. The spacing from roads varies with traffic.<sup>d</sup></li> </ol>

<sup>a</sup> When the probe is located on a rooftop, this separation distance is in reference to walls, parapets, or penthouses located on the roof.

<sup>b</sup> Sites not meeting this criterion would be classified as middle scale.

<sup>c</sup> Distance is dependent upon height of furnace or incineration flue, type of fuel or waste burned, and quality of fuel (sulfur and ash content). This is to avoid undue influences from minor pollutant sources.

<sup>d</sup> Distance is dependent upon traffic ADT, pollutant, and spatial scale.

<sup>e</sup> In addition, for PAMS the predominant wind direction for the period of greatest pollutant concentration must be included in the arc.

<sup>f</sup> 3-15 for PAMS

## X. PUBLICATIONS

The following is a partial listing of technical papers and study reports dealing with various aspects of Connecticut air pollutant levels and air quality data.

1. Bruckman, L., ***Asbestos: An Evaluation of Its Environmental Impact in Connecticut***, internal report issued by the Connecticut Department of Environmental Protection, Hartford, Connecticut, March 12, 1976.
2. Lepow, M. L., L. Bruckman, R.A. Rubino, S. Markowitz, M. Gillette and J. Kapish, ***Role of Airborne Lead in Increased Body Burden of Lead in Hartford Children***, "Environ. Health Perspect.", May, 1974, pp. 99-102.
3. Bruckman, L. and R.A. Rubino, ***Rationale Behind a Proposed Asbestos Air Quality Standard***, paper presented at the 67th Annual Meeting of the Air Pollution Control Association, Denver, Colorado, June 9-11, 1974, J. Air Pollut. Cntr. Assoc., 25: 1207-15 (1975).
4. Rubino, R.A., L. Bruckman and J. Magyar, ***Ozone Transport***, paper presented at the 68th Annual Meeting of the Air Pollution Control Association, Boston, Massachusetts, June 15-20, 1975, J. Air Pollut. Cntr. Assoc.: 26, 972-5 (1976).
5. Bruckman, L., R.A. Rubino and T. Helfgott, ***Rationale Behind a Proposed Cadmium Air Quality Standard***, paper presented at the 68th Annual Meeting of the Air Pollution Control Association, Boston, Massachusetts, June 15-20, 1975.
6. Rubino, R.A., L. Bruckman, A. Kramar, W. Keever and P. Sullivan, ***Population Density and Its Relationship to Airborne Pollutant Concentrations and Lung Cancer Incidence in Connecticut***, paper presented at the 68th Annual Meeting of the Air Pollution Control Association, Boston, Massachusetts, June 15-20, 1975.
7. Lepow, M.L., L. Bruckman, M. Gillette, R.A. Rubino and J. Kapish, ***Investigations into Sources of Lead in the Environment of Urban Children***, "Environ. Res.", 10: 415-26 (1975).
8. Bruckman, L., E. Hyne and P. Norton, ***A Low Volume Particulate Ambient Air Sampler***, paper presented at the APCA Specialty Conference entitled "Measurement Accuracy as it Relates to Regulation Compliance," New Orleans, Louisiana, October 26-28, 1975, APCA publication SP-16, Air Pollution Control Association, Pittsburgh, Pennsylvania, 1976.
9. Bruckman, L. and R.A. Rubino, ***High Volume Sampling Errors Incurred During Passive Sample Exposure Periods***, "J. Air Pollut. Cntr. Assoc.", 26: 881-3 (1976).
10. Bruckman, L., R.A. Rubino and B. Christine, ***Asbestos and Mesothelioma Incidence in Connecticut***, "J. Air Pollut. Cntr. Assoc.", 27: 121-6 (1977).
11. Bruckman, L., ***Suspended Particulate Transport in Connecticut: An Investigation Into the Relationship Between TSP Concentrations and Wind Direction in Connecticut***, internal report issued by the Connecticut Department of Environmental Protection, Hartford, Connecticut, December 24, 1976.

12. Bruckman, L. and R.A. Rubino, "**Monitored Asbestos Concentrations in Connecticut**," paper presented at the 70th Annual Meeting of the Air Pollution Control Association, Toronto, Ontario, June 20-24, 1977.
13. Bruckman, L., "**Suspended Particulate Transport**," paper presented at the 70th Annual Meeting of the Air Pollution Control Association, Toronto, Ontario, June 20-24, 1977.
14. Bruckman, L., "**A Study of Airborne Asbestos Fibers in Connecticut**," paper presented at the "Workshop in Asbestos: Definitions and Measurement Methods" sponsored by the National Bureau of Standards/U.S. Department of Commerce, July 18-20, 1977.
15. Bruckman, L., "**Monitored Asbestos Concentrations Indoors**," paper presented at The Fourth Joint Conference of Sensing Environmental Pollutants, New Orleans, Louisiana, November 6-11, 1977.
16. Bruckman, L., paper presented at the Joint Conference on Applications of Air Pollution Meteorology, Salt Lake City, Utah, November 28 - December 2, 1977.
17. Bruckman, L., E. Hyne, W. Keever, "**A Comparison of Low Volume and High Volume Particulate Sampling**," internal report issued by the Connecticut Department of Environmental Protection, Hartford, Connecticut, 1976.
18. "**Data Validation and Monitoring Site Review**," (part of the Air Quality Maintenance Planning Process), internal report issued by the Connecticut Department of Environmental Protection, Hartford, Connecticut, June 15, 1976.
19. "**Air Quality Data Analysis**," (part of the Air Quality Maintenance Planning Process), internal report issued by the Connecticut Department of Environmental Protection, Hartford, Connecticut, August 16, 1976.
20. Bruckman, L., "**Investigation into the Causes of Elevated SO<sub>2</sub> Concentrations Prevalent Across Connecticut During Periods of SW Wind Flow**," paper presented at the 71st Annual Meeting of the Air Pollution Control Association, Paper #78-16.4, Houston, Texas, June 25-29, 1978.
21. Anderson, M.K., "**Power Plant Impact on Ambient Air: Coal vs. Oil Combustion**," paper presented at the 68th Annual Meeting of the Air Pollution Control Association, Paper #75-33.5, Boston, MA, June 15-20, 1975.
22. Anderson, M.K., G. D. Wight, "**New Source Review: An Ambient Assessment Technique**," paper presented at the 71st Annual Meeting of the Air Pollution Control Association, Paper #78-2.4, Houston, TX, June 25-29, 1978.
23. Wolff, G.T., P.J. Lioy, G.D. Wight, R.E. Pasceri, "**Aerial Investigation of the Ozone Plume Phenomenon**," J. Air Pollut. Control Association, 27: 460-3 (1977).
24. Wolff, G.T., P.J. Lioy, R.E. Meyers, R.T. Cederwall, G.D. Wight, R.E. Pasceri, R.S. Taylor, "**Anatomy of Two Ozone Transport Episodes in the Washington, D.C., to Boston, Mass., Corridor**," Environ. Sci. Technol., 11-506-10 (1977).
25. Wolff, G.T., P.J. Lioy, G.D. Wight, R.E. Meyers, and R.T. Cederwall, "**Transport of Ozone Associated With an Air Mass**," In: Proceed. 70 Annual Meeting APCA, Paper 377-20.3, Toronto, Canada, June, 1977.

26. Wight, G.D., G.T. Wolff, P.J. Liroy, R.E. Meyers, and R.T.Cederwall, **"Formation and Transport of Ozone in the Northeast Quadrant of the U.S.,"** In: Proceed. ASTM Sym. Air Quality and Atmos. Ozone, Boulder, Colo., Aug. 1977.
27. Wolff, G.T., P.J. Liroy, and G.D. Wight, **"An Overview of the Current Ozone Problem in the Northeastern and Midwestern U.S.,"** In: Proceed. Mid-Atlantic States APCA Conf. on Hydrocarbon Control Feasibility, p. 98, New York, N.Y., April, 1977.
28. Wolff, G.T., P.J. Liroy, G.D. Wight, R.E. Meyers, and R.T.Cederwall, **"An Investigation of Long-Range Transport of Ozone Across the Midwestern and Eastern U.S.,"** Atmos. Environ. 11:797 (1977).
29. Bruckman, L., R.A. Rubino, and J. Gove, **"Connecticut's Approach to Controlling Toxic Air Pollutants,"** paper presented at the STAPPA / ALAPCO Air Toxics Conference, Air Toxics Control: An Environmental Challenge, Washington, D. C., October 15-17, 1986.
30. Wackter, D.J., and P.V. Bayly, **"The Effectiveness of Emission Controls on Reducing Ozone Levels in Connecticut from 1976 through 1987,"** paper presented at the APCA Specialty Conference on: The Scientific and Technical Issues Facing Post-1987 Ozone Control Strategies, Hartford, Connecticut, November 17-19, 1987.
31. Wackter, D.J., **"Sensitivity Analysis of Ozone Predictions by the Urban Airshed Model in the Northeast,"** paper presented at the Air Pollution Control Association Conference on VOC and Ozone, Northampton, MA, November 1-2, 1988.
32. Leston, A.R., J. Catalano, K. Crossman, R. Pirolli, N. Rowe, G. Hunt and B. Maisel, **"The Connecticut Department of Environmental Protection's Evaluation of Pre/Post Operational Dioxin Monitoring Conducted at Four Resources Recovery Facilities,"** paper presented at the Dioxin '91 Conference, RTP, North Carolina, Sept., 1991.
33. Leston, A.R., and W. Ollison, **"Estimated Accuracy of Ozone Design Values: Are They Compromised by Method Interference?,"** In: Proceed. A&WMA's Conference "Tropospheric Ozone: Nonattainment and Design Value Issues," Boston, Massachusetts, October 27-30, 1992.
34. Leston, A.R., and S.A. Bailey, **"Preliminary Report on Establishing a Prototype PAMS Site in the Urban Northeast,"** In: Proceed. A&WMA's 86<sup>th</sup> Annual Meeting & Exhibition, Denver, Colorado, June 14-18, 1993.
35. Hartman, R.M., and A. Leston, **"Use of an OPSIS Open Path Monitor for Ambient Aldehyde Monitoring,"** In: Proceed. A&WMA's Conference "Optical Sensing for Environmental and Process Monitoring," McLean, Virginia, November 7-10, 1994.
36. Main, H.H., P.T. Roberts, A.R. Leston, and P. Brunelli, **"Data Validation of PAMS Auto-GC Data: Lessons Learned,"** In: Proceed. A&WMA's Conference "Measurement of Toxic And Related Air Pollutants," RTP, North Carolina, May 7-9, 1996.
36. Leston, A.R., A. VanArsdale, and Allen Ol, **"Comparative Results of Ambient Air Analysis by Two Methods: Automated Field GC Versus Integrated Canister,"** In: Proceed. A&WMA's Conference "Measurement of Toxic And Related Air Pollutants," RTP, North Carolina, April 29-May 1, 1997.

## XI. ERRATA

During the preparation of this Air Quality Summary, a number of errors were discovered in previous editions of this document. For the benefit of the reader, the corrections are presented below:

- Regarding the 1996 edition of the Air Quality Summary,
  1. On page 37, in Table 3-1, the site name for Stamford 124 is Stamford High School, not the Health Department.
  2. On page 48, in the first paragraph under 1-HOUR AVERAGE, the last sentence should read in part: "... the smallest decrease was 0.007 ppm at Torrington 006."
  3. On page 62, in Table 5-1, replace the statistics for East Hartford 003 in 1993 with the following: YEAR: 1995; SAMPLES: 8496; ARITHMETIC MEAN: 31.21; 95-PERCENT-LIMITS, LOWER: 31.13, UPPER: 31.29; STANDARD DEVIATION: 22.05.
  4. On page 69, in Table 6-3, add a superscript "b" after site New Haven 025, and place the following footnote at the bottom of the table: "<sup>b</sup> Site 025 replaced site 019 in February of 1995."
  
- Regarding the 1994 edition of the Air Quality Summary,
  1. On pages 22 and 23, in Figure 2-2, the rankings of the PM<sub>10</sub> concentrations -- represented by a whole number to the left of each horizontal bar -- are in error. On page 22, add 10 to each ranking; on page 23, add 20 to each ranking.
  
- Regarding the 1993-1995 editions of the Air Quality Summary,
  1. In Table 3-1, the site name for Stamford 124 is Stamford High School, not the Health Department.